

BBM401-Lecture 6: Turing Machines

Lecturer: Lale Özkahya

Resources for the presentation:

<https://courses.engr.illinois.edu/cs373/fa2010/lectures>

<https://courses.engr.illinois.edu/cs498374/lectures.html>


David Hilbert

- Early 1900s – crisis in math foundations
 - attempts to formalize resulted in paradoxes, etc.
- 1920, Hilbert's Program:
 - “mechanize” mathematics
- Finite axioms, inference rules
 - turn crank, determine truth
 - needed: axioms *consistent & complete*



Kurt Gödel

- German logician, at age 25 (1931) proved:
“There are true statements that can’t be proved”
(i.e., “no” to Hilbert)
- Shook the foundations of
 - mathematics
 - philosophy
 - science
 - everything




This slide recycled from Lecture 1

Alan Turing

- British mathematician
 - cryptanalysis during WWII
 - arguably, father of AI, Theory
 - several books, movies
- Defined “*computer*”, “*program*”


and (1936) provided foundations for investigating fundamental question of what is computable, what is not computable.



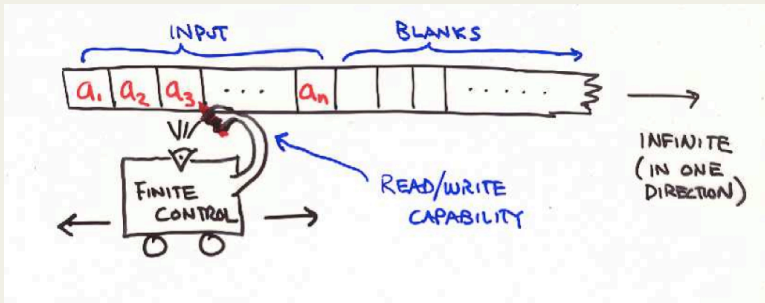


- DFA with (infinite) tape.
- One move: read, **write**, move, change state.

Turing Machines

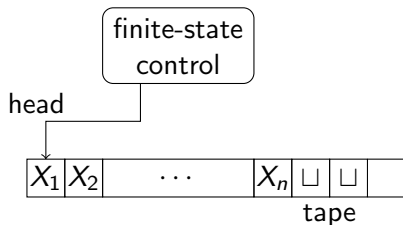


- Unrestricted memory: an infinite tape

Turing Machines

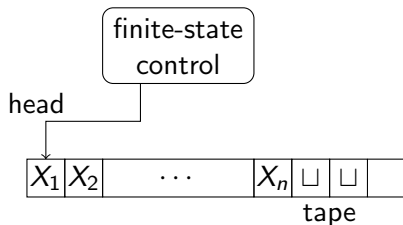


- Unrestricted memory: an infinite tape
 - A finite state machine that reads/writes symbols on the tape

Turing Machines

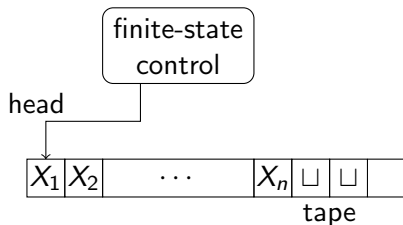


- Unrestricted memory: an infinite tape
 - A finite state machine that reads/writes symbols on the tape
 - Can read/write anywhere on the tape

Turing Machines

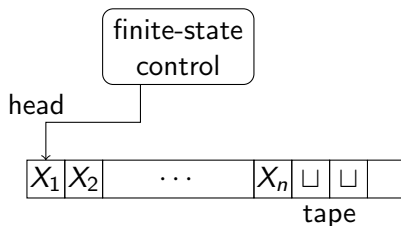


- Unrestricted memory: an infinite tape
 - A finite state machine that reads/writes symbols on the tape
 - Can read/write anywhere on the tape
 - Tape is infinite in one direction only (other variants possible)

Turing Machines

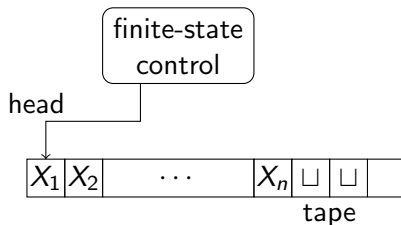


- Unrestricted memory: an infinite tape
 - A finite state machine that reads/writes symbols on the tape
 - Can read/write anywhere on the tape
 - Tape is infinite in one direction only (other variants possible)
- Initially, tape has input and the machine is reading (i.e., tape head is on) the leftmost input symbol.

Turing Machines

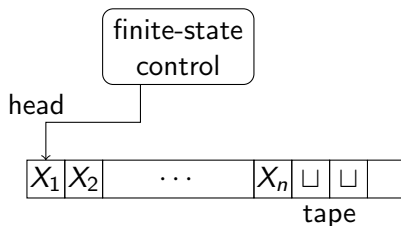

- Unrestricted memory: an infinite tape
 - A finite state machine that reads/writes symbols on the tape
 - Can read/write anywhere on the tape
 - Tape is infinite in one direction only (other variants possible)
- Initially, tape has input and the machine is reading (i.e., tape head is on) the leftmost input symbol.
- Transition (based on current state and symbol under head):
 - Change control state
 - Overwrite a new symbol on the tape cell under the head
 - Move the head left, or right.

Example

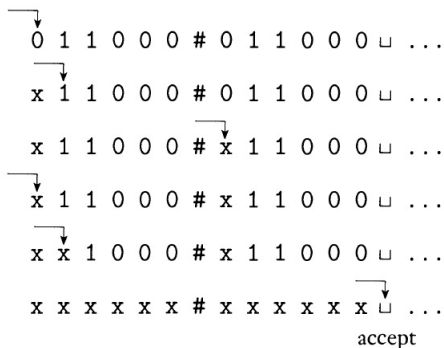

- Let M_1 be a Turing machine that tests if an input string is in the language B , where $B = \{w\#w \mid w \in \{0,1\}^*\}$.
- M_1 zig-zags across the tape: if no $\#$ is found, *reject*. Cross off symbols as they are checked to keep track.
- When all symbols to the left of the $\#$ have been crossed off, check for any remaining symbols to the right of the $\#$. If any symbol remained, *reject*, otherwise *accept*.

Turing Machines

Formal Definition

A Turing machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{\text{acc}}, q_{\text{rej}})$ where

Turing Machines

Formal Definition

A Turing machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{\text{acc}}, q_{\text{rej}})$ where

- Q is a finite set of control states

Turing Machines

Formal Definition

A Turing machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{\text{acc}}, q_{\text{rej}})$ where

- Q is a finite set of control states
- Σ is a finite set of input symbols

Turing Machines

Formal Definition

A Turing machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{\text{acc}}, q_{\text{rej}})$ where

- Q is a finite set of control states
- Σ is a finite set of input symbols
- $\Gamma \supseteq \Sigma$ is a finite set of tape symbols. Also, a blank symbol $\sqcup \in \Gamma \setminus \Sigma$

Turing Machines

Formal Definition

A Turing machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{\text{acc}}, q_{\text{rej}})$ where

- Q is a finite set of control states
- Σ is a finite set of input symbols
- $\Gamma \supseteq \Sigma$ is a finite set of tape symbols. Also, a blank symbol $\sqcup \in \Gamma \setminus \Sigma$
- $q_0 \in Q$ is the initial state

Turing Machines

Formal Definition

A Turing machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{\text{acc}}, q_{\text{rej}})$ where

- Q is a finite set of control states
- Σ is a finite set of input symbols
- $\Gamma \supseteq \Sigma$ is a finite set of tape symbols. Also, a blank symbol $\sqcup \in \Gamma \setminus \Sigma$
- $q_0 \in Q$ is the initial state
- $q_{\text{acc}} \in Q$ is the accept state

Turing Machines

Formal Definition

A Turing machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{\text{acc}}, q_{\text{rej}})$ where

- Q is a finite set of control states
- Σ is a finite set of input symbols
- $\Gamma \supseteq \Sigma$ is a finite set of tape symbols. Also, a blank symbol $\sqcup \in \Gamma \setminus \Sigma$
- $q_0 \in Q$ is the initial state
- $q_{\text{acc}} \in Q$ is the accept state
- $q_{\text{rej}} \in Q$ is the reject state, where $q_{\text{rej}} \neq q_{\text{acc}}$


Turing Machines

Formal Definition

A Turing machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{\text{acc}}, q_{\text{rej}})$ where


- Q is a finite set of control states
- Σ is a finite set of input symbols
- $\Gamma \supseteq \Sigma$ is a finite set of tape symbols. Also, a blank symbol $\sqcup \in \Gamma \setminus \Sigma$
- $q_0 \in Q$ is the initial state
- $q_{\text{acc}} \in Q$ is the accept state
- $q_{\text{rej}} \in Q$ is the reject state, where $q_{\text{rej}} \neq q_{\text{acc}}$
- $\delta : Q \times \Gamma \rightarrow Q \times \Gamma \times \{L, R\}$ is the transition function.
Given the current state and symbol being read, the transition function describes the next state, symbol to be written and direction (left or right) in which to move the tape head.

Transition Function



$\delta(q_1, X) = (q_2, Y, L)$: Read transition as “the machine when in state q_1 , and reading symbol X under the tape head, will move to state q_2 , overwrite X with Y , and move its tape head to the left”


Transition Function



$\delta(q_1, X) = (q_2, Y, L)$: Read transition as “the machine when in state q_1 , and reading symbol X under the tape head, will move to state q_2 , overwrite X with Y , and move its tape head to the left”

- In fact $\delta : (Q \setminus \{q_{acc}, q_{rej}\}) \times \Gamma \rightarrow Q \times \Gamma \times \{L, R\}$.


Transition Function



$\delta(q_1, X) = (q_2, Y, L)$: Read transition as “the machine when in state q_1 , and reading symbol X under the tape head, will move to state q_2 , overwrite X with Y , and move its tape head to the left”

- In fact $\delta : (Q \setminus \{q_{\text{acc}}, q_{\text{rej}}\}) \times \Gamma \rightarrow Q \times \Gamma \times \{L, R\}$. No transition defined after reaching q_{acc} or q_{rej}


Transition Function



$\delta(q_1, X) = (q_2, Y, L)$: Read transition as “the machine when in state q_1 , and reading symbol X under the tape head, will move to state q_2 , overwrite X with Y , and move its tape head to the left”

- In fact $\delta : (Q \setminus \{q_{\text{acc}}, q_{\text{rej}}\}) \times \Gamma \rightarrow Q \times \Gamma \times \{L, R\}$. No transition defined after reaching q_{acc} or q_{rej}
- Transitions are deterministic

Transition Function



$\delta(q_1, X) = (q_2, Y, L)$: Read transition as “the machine when in state q_1 , and reading symbol X under the tape head, will move to state q_2 , overwrite X with Y , and move its tape head to the left”

- In fact $\delta : (Q \setminus \{q_{acc}, q_{rej}\}) \times \Gamma \rightarrow Q \times \Gamma \times \{L, R\}$. No transition defined after reaching q_{acc} or q_{rej}
- Transitions are deterministic
- Convention: if $\delta(q, X)$ is not explicitly specified, it is taken as leading to q_{rej} , i.e., say $\delta(q, X) = (q_{rej}, \sqcup, R)$

Configurations

The configuration (or “instantaneous description”) contains all the information to exactly capture the “current state of the computation”

Configurations

The configuration (or “instantaneous description”) contains all the information to exactly capture the “current state of the computation”

$$X_1 X_2 \cdots X_{i-1} q X_i \cdots X_n$$

- Includes the current state

Configurations

The configuration (or “instantaneous description”) contains all the information to exactly capture the “current state of the computation”

$$X_1 X_2 \cdots X_{i-1} q X_i \cdots X_n$$

- Includes the current state: q

Configurations

The configuration (or “instantaneous description”) contains all the information to exactly capture the “current state of the computation”

$$X_1 X_2 \cdots X_{i-1} q X_i \cdots X_n$$

- Includes the current state: q
- Position of the tape head

Configurations

The configuration (or “instantaneous description”) contains all the information to exactly capture the “current state of the computation”

$$X_1 X_2 \cdots X_{i-1} q X_i \cdots X_n$$

- Includes the current state: q
- Position of the tape head: Scanning i^{th} symbol X_i

Configurations

The configuration (or “instantaneous description”) contains all the information to exactly capture the “current state of the computation”

$$X_1 X_2 \cdots X_{i-1} q X_i \cdots X_n$$

- Includes the current state: q
- Position of the tape head: Scanning i^{th} symbol X_i
- Contents of all the tape cells till the rightmost nonblank symbol. This is will always be finitely many cells.

Configurations

The configuration (or “instantaneous description”) contains all the information to exactly capture the “current state of the computation”

$$X_1 X_2 \cdots X_{i-1} q X_i \cdots X_n$$

- Includes the current state: q
- Position of the tape head: Scanning i^{th} symbol X_i
- Contents of all the tape cells till the rightmost nonblank symbol. This will always be finitely many cells. Those symbols are $X_1 X_2 \cdots X_n$, where $X_n \neq \sqcup$ unless the tape head is on it.

Special Configurations

- Start configuration: $q_0X_1 \cdots X_n$, where the input is $X_1 \cdots X_n$

Special Configurations

- **Start configuration:** $q_0X_1 \cdots X_n$, where the input is $X_1 \cdots X_n$
- **Accept and reject configurations:** The state q is q_{acc} or q_{rej} , respectively

Special Configurations

- **Start configuration:** $q_0X_1 \cdots X_n$, where the input is $X_1 \cdots X_n$
- **Accept and reject configurations:** The state q is q_{acc} or q_{rej} , respectively. These configurations are **halting configurations**, because there are no transitions possible from them.

Definition

We say one configuration (C_1) **yields** another (C_2) , denoted as $C_1 \vdash C_2$, if one of the following holds.

- If $\delta(q, X_i) = (p, Y, L)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-2} p X_{i-1} Y X_{i+1} \cdots X_n$$

Definition

We say one configuration (C_1) **yields** another (C_2) , denoted as $C_1 \vdash C_2$, if one of the following holds.

- If $\delta(q, X_i) = (p, Y, L)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-2} p X_{i-1} Y X_{i+1} \cdots X_n$$

Boundary Cases:

- If $i = 1$ then

Definition

We say one configuration (C_1) **yields** another (C_2) , denoted as $C_1 \vdash C_2$, if one of the following holds.

- If $\delta(q, X_i) = (p, Y, L)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-2} p X_{i-1} Y X_{i+1} \cdots X_n$$

Boundary Cases:

- If $i = 1$ then $q X_1 X_2 \cdots X_n \vdash p Y X_2 \cdots X_n$

Definition

We say one configuration (C_1) **yields** another (C_2) , denoted as $C_1 \vdash C_2$, if one of the following holds.

- If $\delta(q, X_i) = (p, Y, L)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-2} p X_{i-1} Y X_{i+1} \cdots X_n$$

Boundary Cases:

- If $i = 1$ then $q X_1 X_2 \cdots X_n \vdash p Y X_2 \cdots X_n$
- If $i = n$ and $Y = \sqcup$ then

Definition

We say one configuration (C_1) **yields** another (C_2) , denoted as $C_1 \vdash C_2$, if one of the following holds.

- If $\delta(q, X_i) = (p, Y, L)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-2} p X_{i-1} Y X_{i+1} \cdots X_n$$

Boundary Cases:

- If $i = 1$ then $q X_1 X_2 \cdots X_n \vdash p Y X_2 \cdots X_n$
- If $i = n$ and $Y = \sqcup$ then $X_1 \cdots X_{n-1} q X_n \vdash X_1 \cdots p X_{n-1}$

Definition

We say one configuration (C_1) **yields** another (C_2) , denoted as $C_1 \vdash C_2$, if one of the following holds.

- If $\delta(q, X_i) = (p, Y, L)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-2} p X_{i-1} Y X_{i+1} \cdots X_n$$

Boundary Cases:

- If $i = 1$ then $q X_1 X_2 \cdots X_n \vdash p Y X_2 \cdots X_n$
- If $i = n$ and $Y = \sqcup$ then $X_1 \cdots X_{n-1} q X_n \vdash X_1 \cdots p X_{n-1}$
- If $\delta(q, X_i) = (p, Y, R)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-1} Y p X_{i+1} \cdots X_n$$

Definition

We say one configuration (C_1) **yields** another (C_2) , denoted as $C_1 \vdash C_2$, if one of the following holds.

- If $\delta(q, X_i) = (p, Y, L)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-2} p X_{i-1} Y X_{i+1} \cdots X_n$$

Boundary Cases:

- If $i = 1$ then $q X_1 X_2 \cdots X_n \vdash p Y X_2 \cdots X_n$
- If $i = n$ and $Y = \sqcup$ then $X_1 \cdots X_{n-1} q X_n \vdash X_1 \cdots p X_{n-1}$
- If $\delta(q, X_i) = (p, Y, R)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-1} Y p X_{i+1} \cdots X_n$$

Boundary Case:

- If $i = n$ then

Single Step

Definition

We say one configuration (C_1) **yields** another (C_2), denoted as $C_1 \vdash C_2$, if one of the following holds.

- If $\delta(q, X_i) = (p, Y, L)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-2} p X_{i-1} Y X_{i+1} \cdots X_n$$

Boundary Cases:

- If $i = 1$ then $q X_1 X_2 \cdots X_n \vdash p Y X_2 \cdots X_n$
- If $i = n$ and $Y = \sqcup$ then $X_1 \cdots X_{n-1} q X_n \vdash X_1 \cdots p X_{n-1}$
- If $\delta(q, X_i) = (p, Y, R)$ then

$$X_1 X_2 \cdots X_{i-1} q X_i X_{i+1} \cdots X_n \vdash X_1 X_2 \cdots X_{i-1} Y p X_{i+1} \cdots X_n$$

Boundary Case:

- If $i = n$ then $X_1 \cdots X_{n-1} q X_n \vdash X_1 \cdots X_{n-1} Y p \sqcup$

Definition

We say $C_1 \vdash^* C_2$ if the machine can move from C_1 to C_2 in zero or more steps.

Definition

We say $C_1 \vdash^* C_2$ if the machine can move from C_1 to C_2 in zero or more steps. i.e., $C_1 = C_2$ or there exist C'_1, \dots, C'_n such that $C_1 = C'_1$, $C_2 = C'_n$ and $C'_i \vdash C'_{i+1}$

Acceptance and Recognition

Definition

A Turing machine M **accepts** w iff $q_0 w \vdash^* \alpha_1 q_{\text{acc}} \alpha_2$, where α_1, α_2 are some strings. In other words, the machine M when started in its initial state and with w as input, reaches the accept state.

Acceptance and Recognition

Definition

A Turing machine M **accepts** w iff $q_0 w \vdash^* \alpha_1 q_{\text{acc}} \alpha_2$, where α_1, α_2 are some strings. In other words, the machine M when started in its initial state and with w as input, reaches the accept state.

Note: The machine may not read all the symbols in w . It may pass back and forth over some symbols of w several times. Finally, w may have been completely overwritten.

Acceptance and Recognition

Definition

A Turing machine M **accepts** w iff $q_0 w \vdash^* \alpha_1 q_{acc} \alpha_2$, where α_1, α_2 are some strings. In other words, the machine M when started in its initial state and with w as input, reaches the accept state.

Note: The machine may not read all the symbols in w . It may pass back and forth over some symbols of w several times. Finally, w may have been completely overwritten.

Definition

For a Turing machine M , define $L(M) = \{w \mid M \text{ accepts } w\}$.

Acceptance and Recognition

Definition

A Turing machine M **accepts** w iff $q_0 w \vdash^* \alpha_1 q_{\text{acc}} \alpha_2$, where α_1, α_2 are some strings. In other words, the machine M when started in its initial state and with w as input, reaches the accept state.

Note: The machine may not read all the symbols in w . It may pass back and forth over some symbols of w several times. Finally, w may have been completely overwritten.

Definition

For a Turing machine M , define $L(M) = \{w \mid M \text{ accepts } w\}$. M is said to accept or **recognize** a language L if $L = L(M)$.

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

Design a TM to accept the language $L = \{0^n 1^n \mid n > 0\}$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

Design a TM to accept the language $L = \{0^n 1^n \mid n > 0\}$

High level description

On input string w

while there are unmarked 0s, do

Mark the left most 0

Scan right till the leftmost unmarked 1;

if there is no such 1 then crash

Mark the leftmost 1


done

Check to see that there are no unmarked 1s;


if there are then crash

accept

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

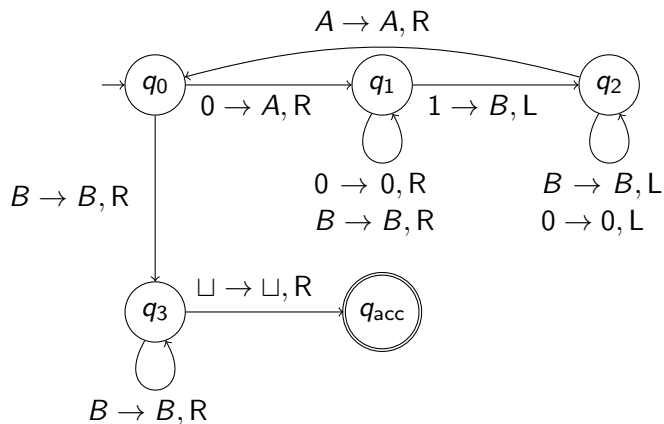


Example 1: TM for $\{0^n 1^n \mid n > 0\}$

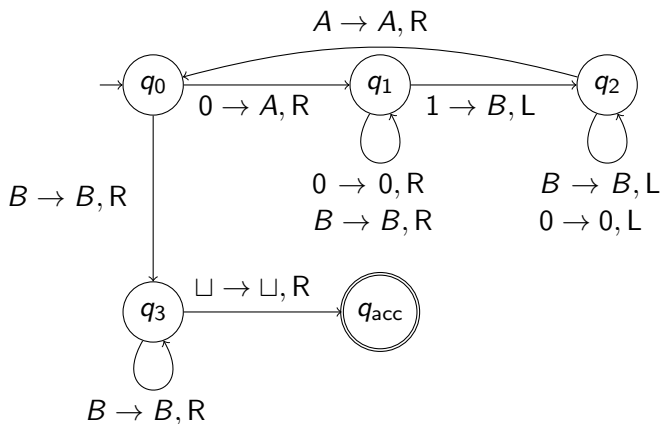


- Accepts input 0011: $q_0 0011 \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

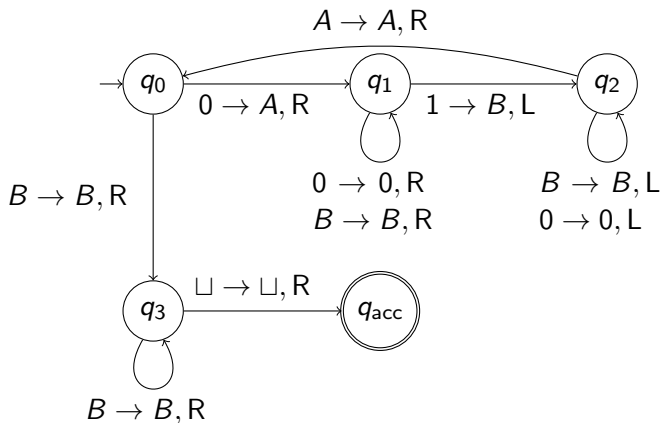


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

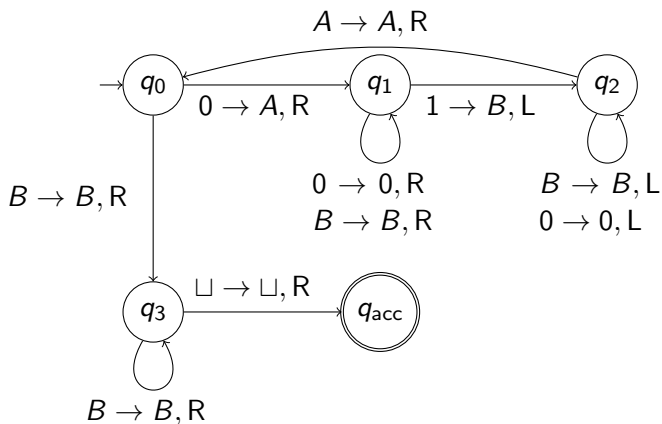


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

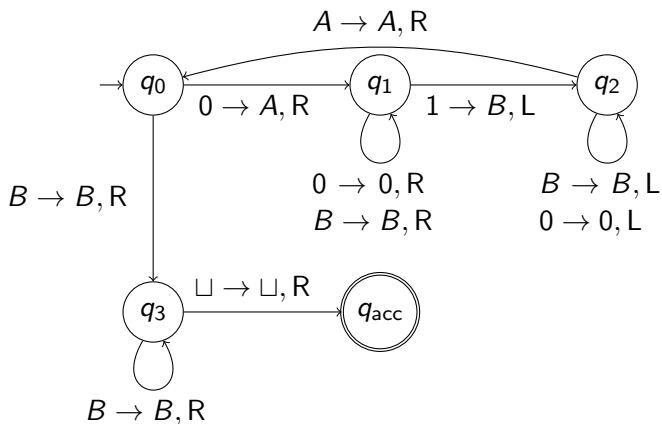


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash Aq_2 0B1 \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

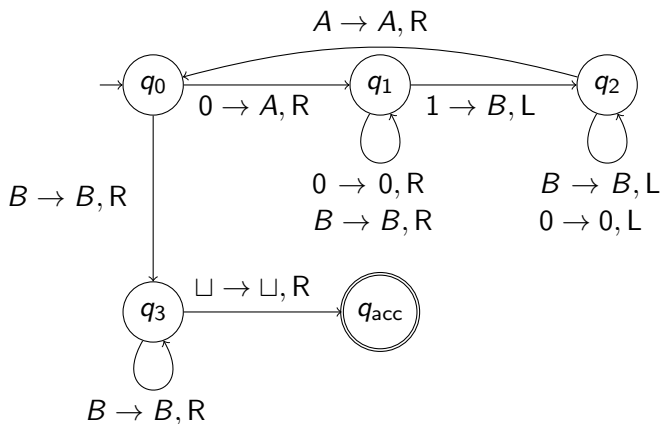


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash Aq_2 0B1 \vdash q_2 A0B1 \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

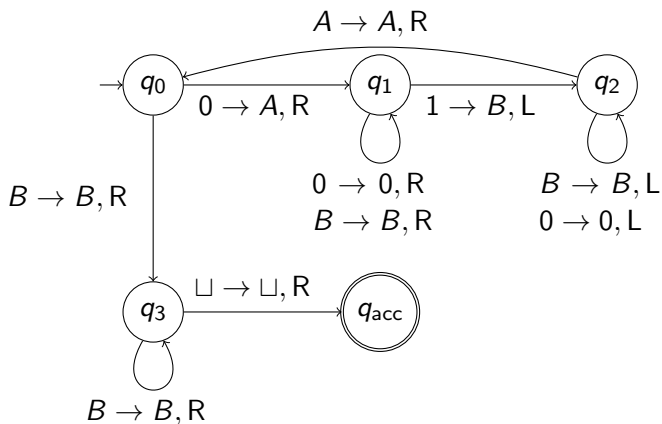


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash Aq_2 0B1 \vdash q_2 A0B1 \vdash Aq_0 0B1 \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

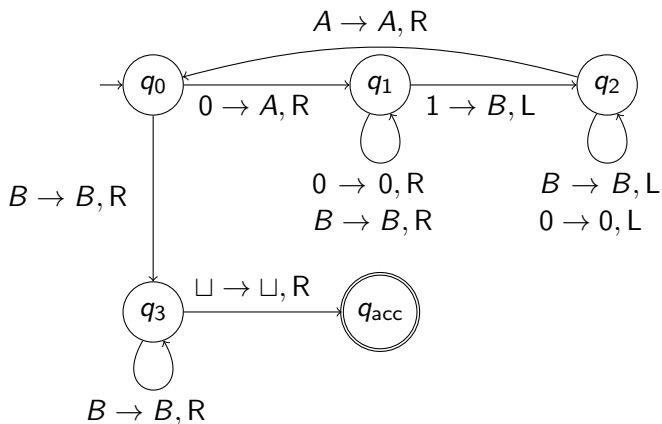


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash Aq_2 0B1 \vdash q_2 A0B1 \vdash Aq_0 0B1 \vdash AAq_1 B1 \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

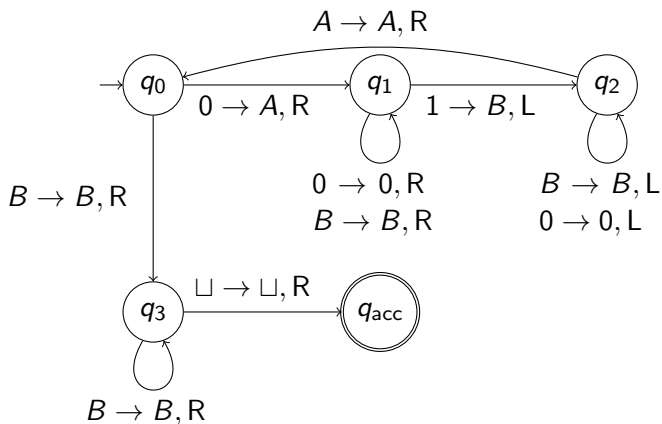


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash Aq_2 0B1 \vdash q_2 A0B1 \vdash Aq_0 0B1 \vdash AAq_1 B1 \vdash AABq_1 1 \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

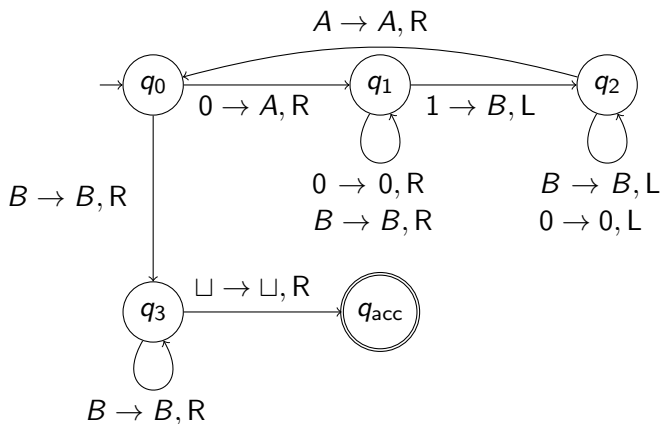


- Accepts input 0011: $q_0 0011 \vdash A q_1 011 \vdash A 0 q_1 11 \vdash A q_2 0 B 1 \vdash q_2 A 0 B 1 \vdash A q_0 0 B 1 \vdash A A q_1 B 1 \vdash A A B q_1 1 \vdash A A q_2 B B \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

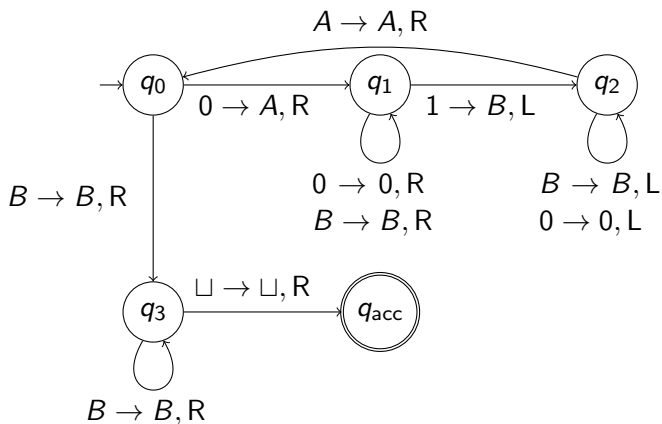


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash Aq_2 0B1 \vdash q_2 A0B1 \vdash Aq_0 0B1 \vdash AAq_1 B1 \vdash AABq_1 1 \vdash AAq_2 BB \vdash Aq_2 ABB \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

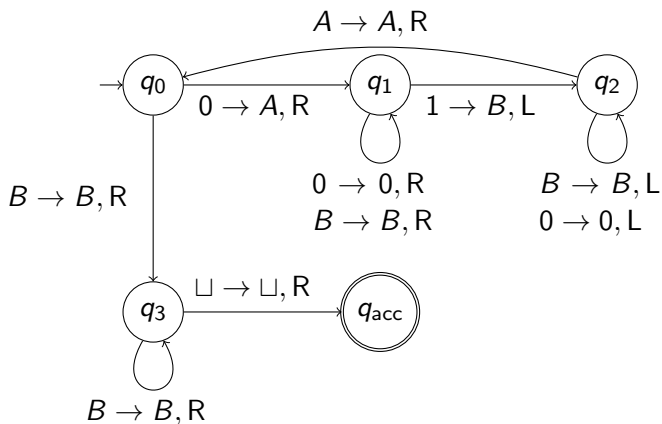


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash Aq_2 0B1 \vdash q_2 A0B1 \vdash Aq_0 0B1 \vdash AAq_1 B1 \vdash AABq_1 1 \vdash AAq_2 BB \vdash Aq_2 ABB \vdash AAq_0 BB \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

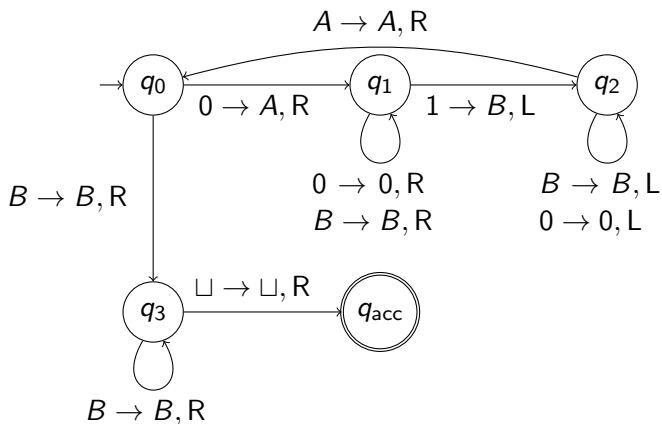


- Accepts input 0011: $q_0 0011 \vdash A q_1 011 \vdash A 0 q_1 11 \vdash A q_2 0 B 1 \vdash q_2 A 0 B 1 \vdash A q_0 0 B 1 \vdash A A q_1 B 1 \vdash A A B q_1 1 \vdash A A q_2 B B \vdash A q_2 A B B \vdash A A q_0 B B \vdash A A B q_3 B \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

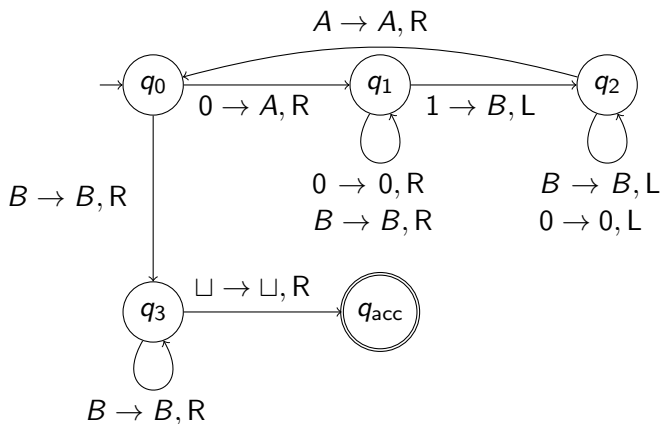


- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash Aq_2 0B1 \vdash q_2 A0B1 \vdash Aq_0 0B1 \vdash AAq_1 B1 \vdash AABq_1 1 \vdash AAq_2 BB \vdash Aq_2 ABB \vdash AAq_0 BB \vdash AABq_3 B \vdash AABBBq_3 \sqcup \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

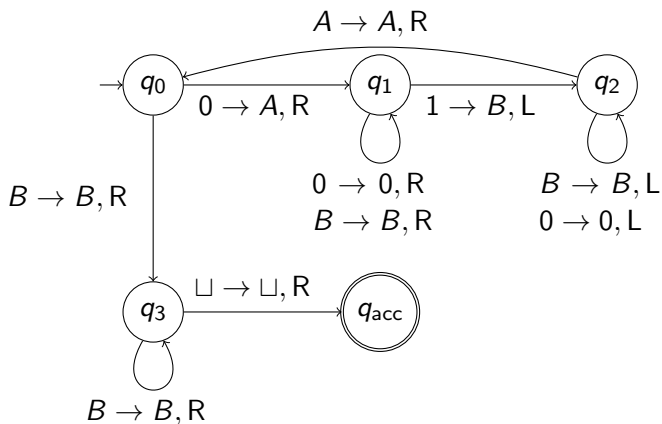


- Accepts input 0011: $q_0 0011 \vdash A q_1 011 \vdash A 0 q_1 11 \vdash A q_2 0 B 1 \vdash q_2 A 0 B 1 \vdash A q_0 0 B 1 \vdash A A q_1 B 1 \vdash A A B q_1 1 \vdash A A q_2 B B \vdash A q_2 A B B \vdash A A q_0 B B \vdash A A B q_3 B \vdash A A B B q_3 \sqcup \vdash A A B B \sqcup q_{acc} \sqcup$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

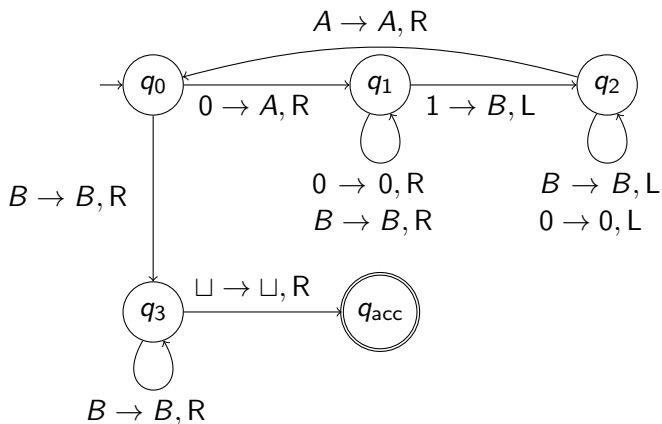

- Accepts input 0011: $q_0 0011 \vdash Aq_1 011 \vdash A0q_1 11 \vdash Aq_2 0B1 \vdash q_2 A0B1 \vdash Aq_0 0B1 \vdash AAq_1 B1 \vdash AABq_1 1 \vdash AAq_2 BB \vdash Aq_2 ABB \vdash AAq_0 BB \vdash AABq_3 B \vdash AABBBq_3 \sqcup \vdash AABBB \sqcup q_{acc} \sqcup$
- Rejects input 00: $q_0 00 \vdash Aq_1 0 \vdash A0q_1 \sqcup \vdash$

Example 1: TM for $\{0^n 1^n \mid n > 0\}$

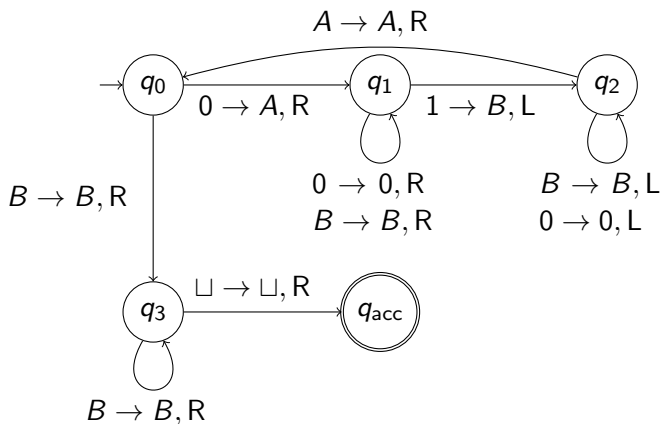

- Accepts input 0011: $q_0 0011 \vdash A q_1 011 \vdash A 0 q_1 11 \vdash A q_2 0 B 1 \vdash q_2 A 0 B 1 \vdash A q_0 0 B 1 \vdash A A q_1 B 1 \vdash A A B q_1 1 \vdash A A q_2 B B \vdash A q_2 A B B \vdash A A q_0 B B \vdash A A B q_3 B \vdash A A B B q_3 \sqcup \vdash A A B B \sqcup q_{acc} \sqcup$
- Rejects input 00: $q_0 00 \vdash A q_1 0 \vdash A 0 q_1 \sqcup \vdash A 0 \sqcup q_{rej} \sqcup$

Example: $\{0^n 1^n \mid n > 0\}$

Formal Definition

The machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{acc}, q_{rej})$ where

Example: $\{0^n 1^n \mid n > 0\}$

Formal Definition

The machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{acc}, q_{rej})$ where

- $Q = \{q_0, q_1, q_2, q_3, q_{acc}, q_{rej}\}$

Example: $\{0^n 1^n \mid n > 0\}$

Formal Definition

The machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{acc}, q_{rej})$ where

- $Q = \{q_0, q_1, q_2, q_3, q_{acc}, q_{rej}\}$
- $\Sigma = \{0, 1\}$, and

Example: $\{0^n 1^n \mid n > 0\}$

Formal Definition

The machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{acc}, q_{rej})$ where

- $Q = \{q_0, q_1, q_2, q_3, q_{acc}, q_{rej}\}$
- $\Sigma = \{0, 1\}$, and $\Gamma = \{0, 1, A, B, \sqcup\}$

Example: $\{0^n 1^n \mid n > 0\}$

Formal Definition

The machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{acc}, q_{rej})$ where

- $Q = \{q_0, q_1, q_2, q_3, q_{acc}, q_{rej}\}$
- $\Sigma = \{0, 1\}$, and $\Gamma = \{0, 1, A, B, \sqcup\}$
- δ is given as follows

$$\delta(q_0, 0) = (q_1, A, R)$$

$$\delta(q_1, 0) = (q_1, 0, R)$$

$$\delta(q_1, 1) = (q_2, B, L)$$

$$\delta(q_2, 0) = (q_2, 0, L)$$

$$\delta(q_3, B) = (q_3, B, R)$$

$$\delta(q_0, B) = (q_3, B, R)$$

$$\delta(q_1, B) = (q_1, B, R)$$

$$\delta(q_2, B) = (q_2, B, L)$$

$$\delta(q_2, A) = (q_0, A, R)$$

$$\delta(q_3, \sqcup) = (q_{acc}, \sqcup, R)$$

In all other cases, $\delta(q, X) = (q_{rej}, \sqcup, R)$.

Example: $\{0^n 1^n \mid n > 0\}$

Formal Definition

The machine is $M = (Q, \Sigma, \Gamma, \delta, q_0, q_{acc}, q_{rej})$ where

- $Q = \{q_0, q_1, q_2, q_3, q_{acc}, q_{rej}\}$
- $\Sigma = \{0, 1\}$, and $\Gamma = \{0, 1, A, B, \sqcup\}$
- δ is given as follows

$$\delta(q_0, 0) = (q_1, A, R)$$

$$\delta(q_1, 0) = (q_1, 0, R)$$

$$\delta(q_1, 1) = (q_2, B, L)$$

$$\delta(q_2, 0) = (q_2, 0, L)$$

$$\delta(q_3, B) = (q_3, B, R)$$

$$\delta(q_0, B) = (q_3, B, R)$$

$$\delta(q_1, B) = (q_1, B, R)$$

$$\delta(q_2, B) = (q_2, B, L)$$

$$\delta(q_2, A) = (q_0, A, R)$$

$$\delta(q_3, \sqcup) = (q_{acc}, \sqcup, R)$$

In all other cases, $\delta(q, X) = (q_{rej}, \sqcup, R)$. So for example,
 $\delta(q_0, 1) = (q_{rej}, \sqcup, R)$.

Example 2: TM for $\{0^n 1^n 2^n \mid n > 0\}$

Design a TM to accept the language $L = \{0^n 1^n 2^n \mid n > 0\}$

Example 2: TM for $\{0^n 1^n 2^n \mid n > 0\}$

Design a TM to accept the language $L = \{0^n 1^n 2^n \mid n > 0\}$

High level description

On input string w

while there are unmarked 0s, do

Mark the left most 0

Scan right to reach the leftmost unmarked 1;

if there is no such 1 then crash

Mark the leftmost 1

Scan right to reach the leftmost unmarked 2;

if there is no such 2 then crash

Mark the leftmost 2


done

Check to see that there are no unmarked 1s or 2s;


if there are then crash

accept

Example 2: TM for $\{0^n 1^n 2^n \mid n > 0\}$

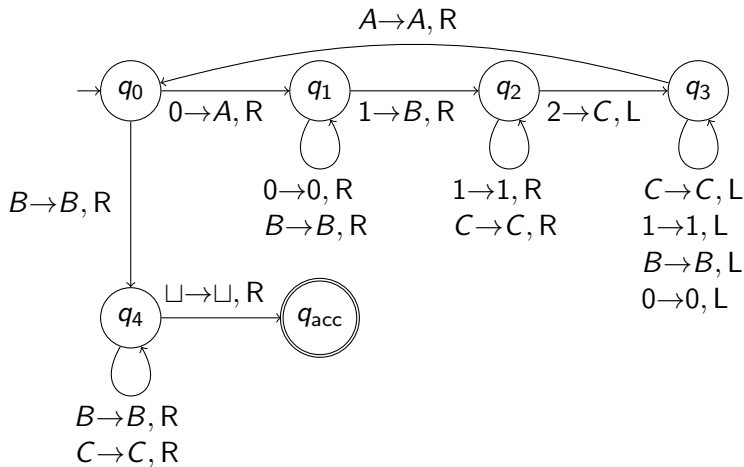


Example 2: TM for $\{0^n 1^n 2^n \mid n > 0\}$

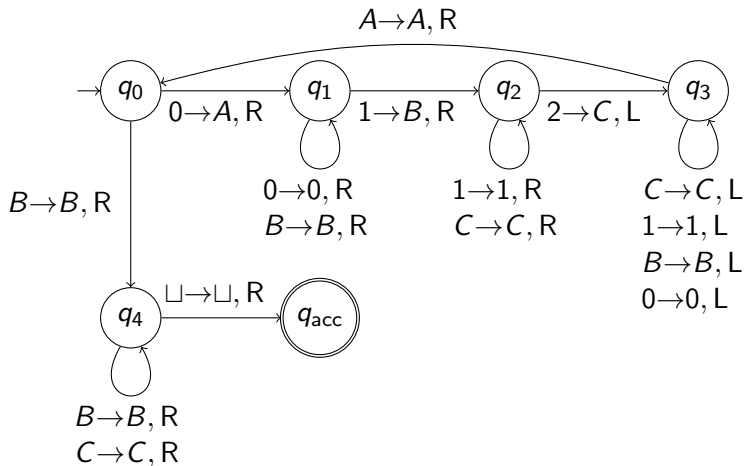


e.g.: $q_0 001122 \vdash^* A0Bq_31C2$

Example 2: TM for $\{0^n 1^n 2^n \mid n > 0\}$

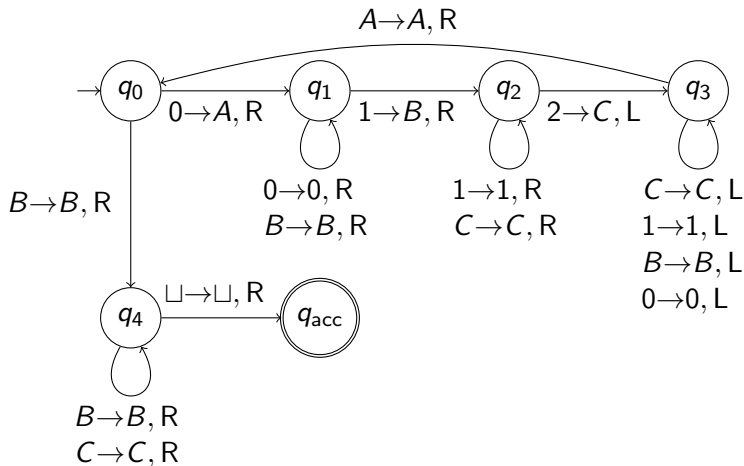


e.g.: $q_0 001122 \vdash^* A0Bq_31C2 \vdash^* q_3 A0B1C2$

Example 2: TM for $\{0^n 1^n 2^n \mid n > 0\}$

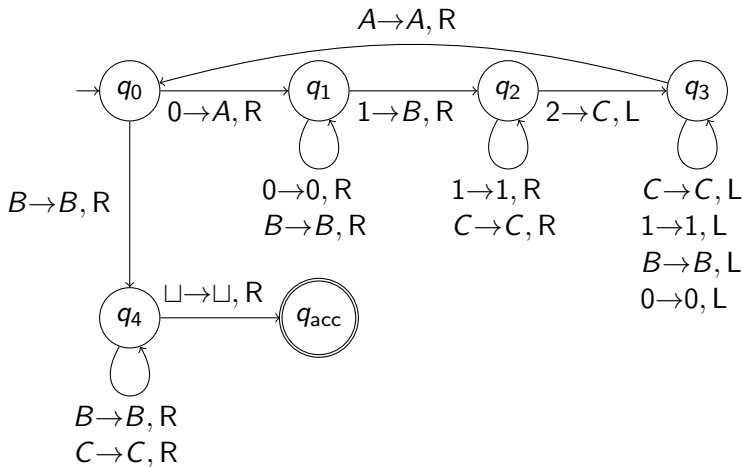


e.g.: $q_0 001122 \vdash^* A0Bq_31C2 \vdash^* q_3 A0B1C2 \vdash Aq_0 0B1C2$

Example 2: TM for $\{0^n 1^n 2^n \mid n > 0\}$

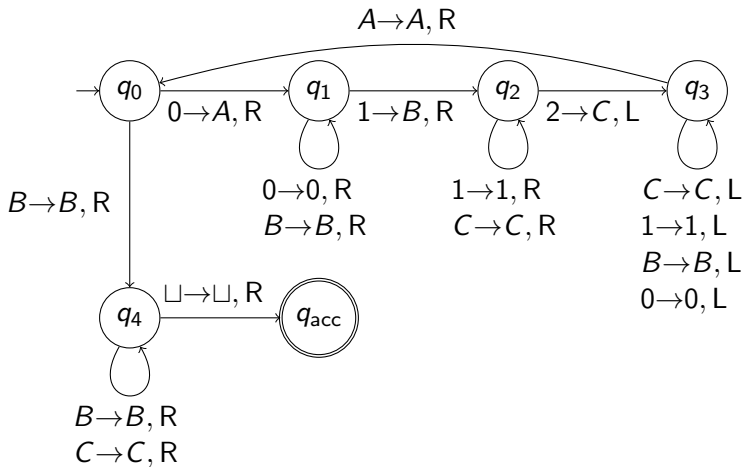


e.g.: $q_0 001122 \vdash^* A0Bq_31C2 \vdash^* q_3 A0B1C2 \vdash Aq_0 0B1C2 \vdash^* AAq_0 BBCC$

Example 2: TM for $\{0^n 1^n 2^n \mid n > 0\}$

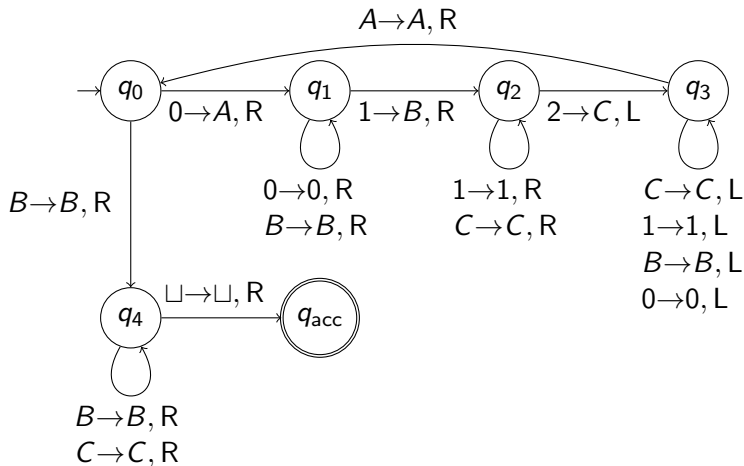

e.g.: $q_0 001122 \vdash^* A0Bq_31C2 \vdash^* q_3 A0B1C2 \vdash Aq_0 0B1C2$
 $\vdash^* AAq_0 BBCC \vdash^* AAB BCC q_4 \sqcup$

Example 2: TM for $\{0^n 1^n 2^n \mid n > 0\}$

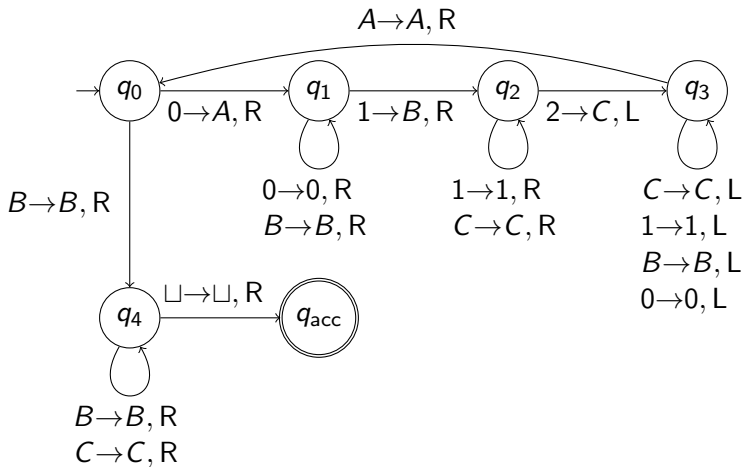

e.g.: $q_0 001122 \vdash^* A0Bq_3 1C2 \vdash^* q_3 A0B1C2 \vdash Aq_0 0B1C2$
 $\vdash^* AAq_0 BBCC \vdash^* AAB BCC q_4 \square \vdash AAB BCC \square q_{acc} \square$