BBM 202 - ALGORITHMS

HACETTEPE UNIVERSITY

DEPT. OF COMPUTER ENGINEERING

ERKUT ERDEM

TRIES

Apr. 21, 2015

Acknowledgement: The course slides are adapted from the slides prepared by R. Sedgewick and K. Wayne of Princeton University.

Today

- Tries
- R-way tries
- Ternary search tries
- Character-based operations

Review: summary of the performance of symbol-table implementations

Order of growth of the frequency of operations.

implementation	typical case			ordered operations	operations on keys
	search	insert	delete		
red-black BST	log N	log N	log N	yes	`compareTo()`
hash table	1 †	1 †	1 †	no	`equals()` `hashcode()`

- † under uniform hashing assumption

Q. Can we do better?

A. Yes, if we can avoid examining the entire key, as with string sorting.

String symbol table basic API

String symbol table. Symbol table specialized to string keys.

```
public class StringST<Value>
```

`StringST()`	*create an empty symbol table*
`void put(String key, Value val)`	*put key-value pair into the symbol table*
`Value get(String key)`	*return value paired with given key*
`void delete(String key)`	*delete key and corresponding value*
⋮	

Goal. Faster than hashing, more flexible than BSTs.

String symbol table implementations cost summary

	character accesses (typical case)				dedup	
implementation	search hit	search miss	insert	space (references)	moby.txt	actors.txt
red-black BST	$L + c \lg^2 N$	$c \lg^2 N$	$c \lg^2 N$	4N	1,4	97,4
hashing (linear probing)	L	L	L	4N to 16N	0,76	40,6

Parameters

- N = number of strings
- L = length of string
- R = radix

file	size	words	distinct
moby.txt	1.2 MB	210 K	32 K
actors.txt	82 MB	11.4 M	900 K

Challenge. Efficient performance for string keys.

Tries

- R-way tries
- Ternary search tries
- Character-based operations

Tries

Tries. [from retrieval, but pronounced "try"]

- Store characters in nodes (not keys).
- Each node has R children, one for each possible character.
- Store values in nodes corresponding to last characters in keys.

for now, we do not draw null links

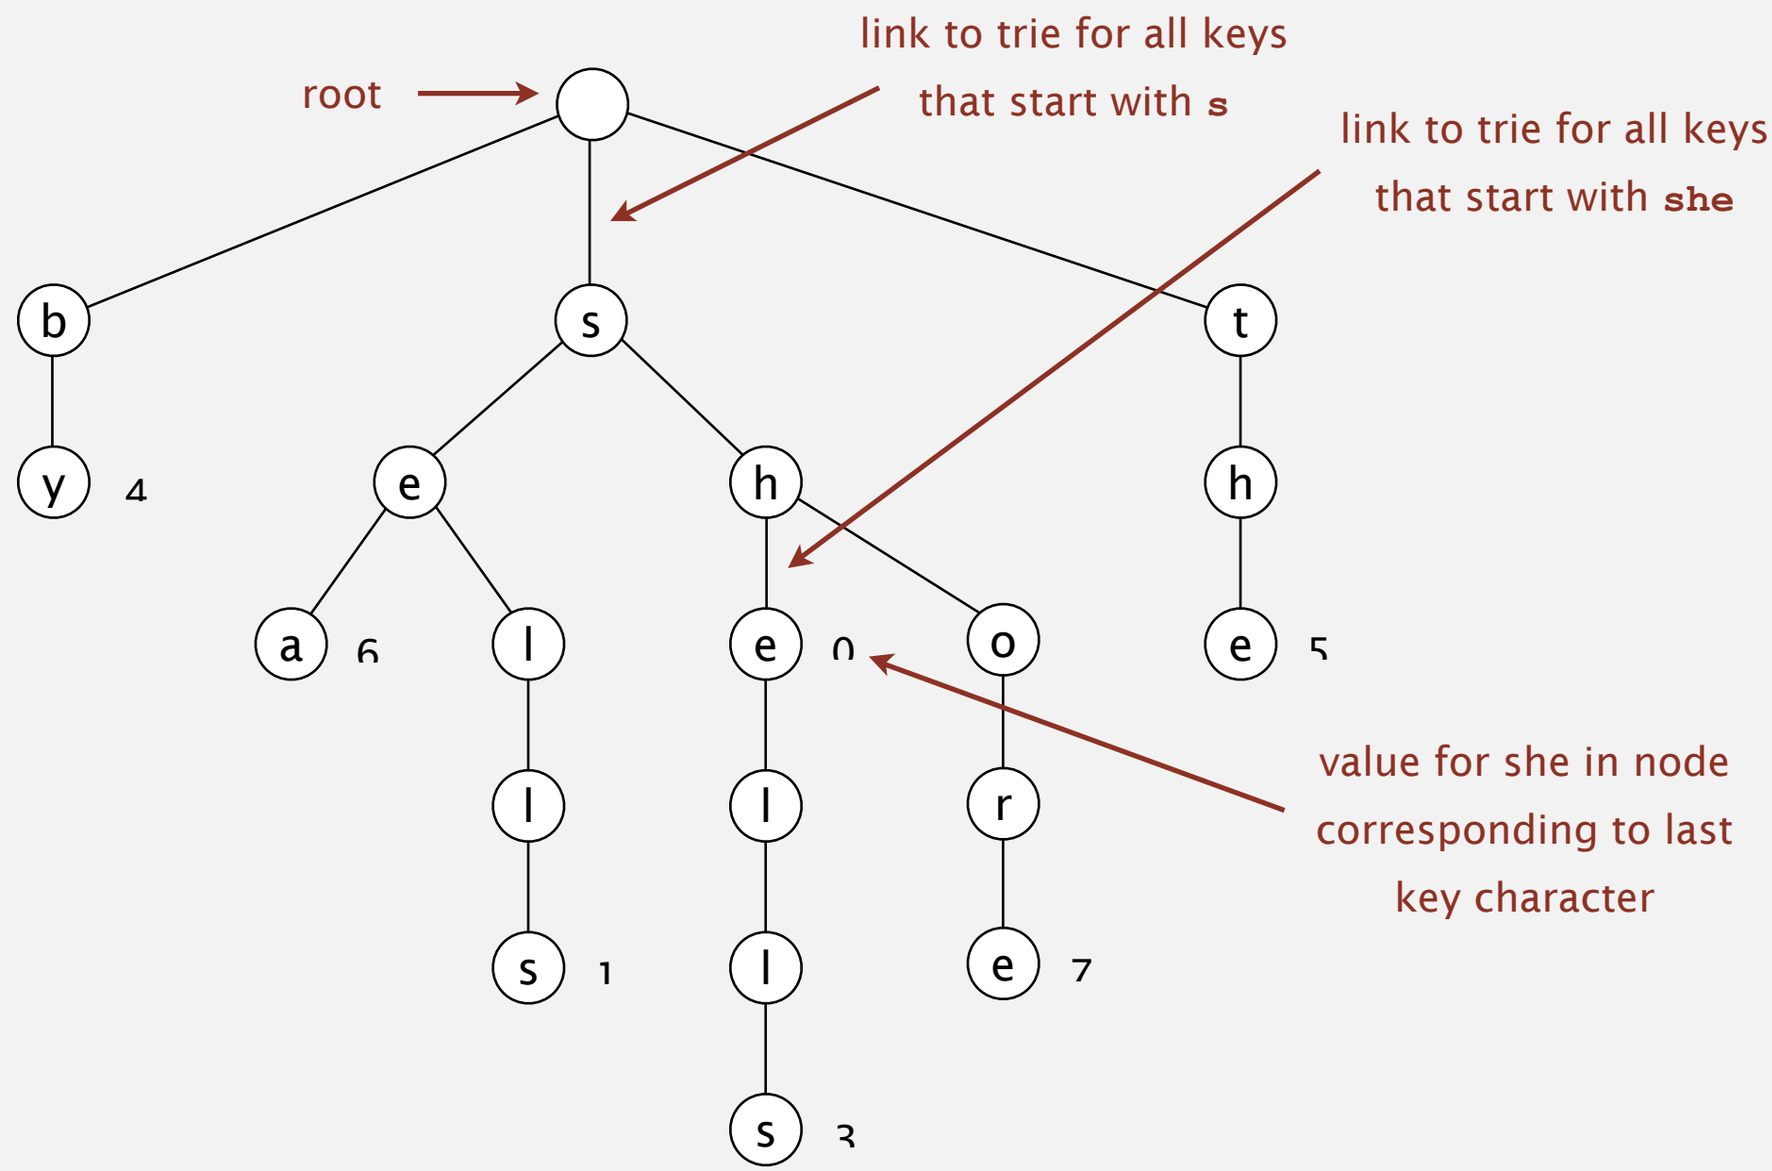

key	value
by	4
sea	6
sells	1
she	0
shells	3
shore	7
the	5

Search in a trie

Follow links corresponding to each character in the key.

- Search hit: node where search ends has a non-null value.
- Search miss: reach a null link or node where search ends has null value.

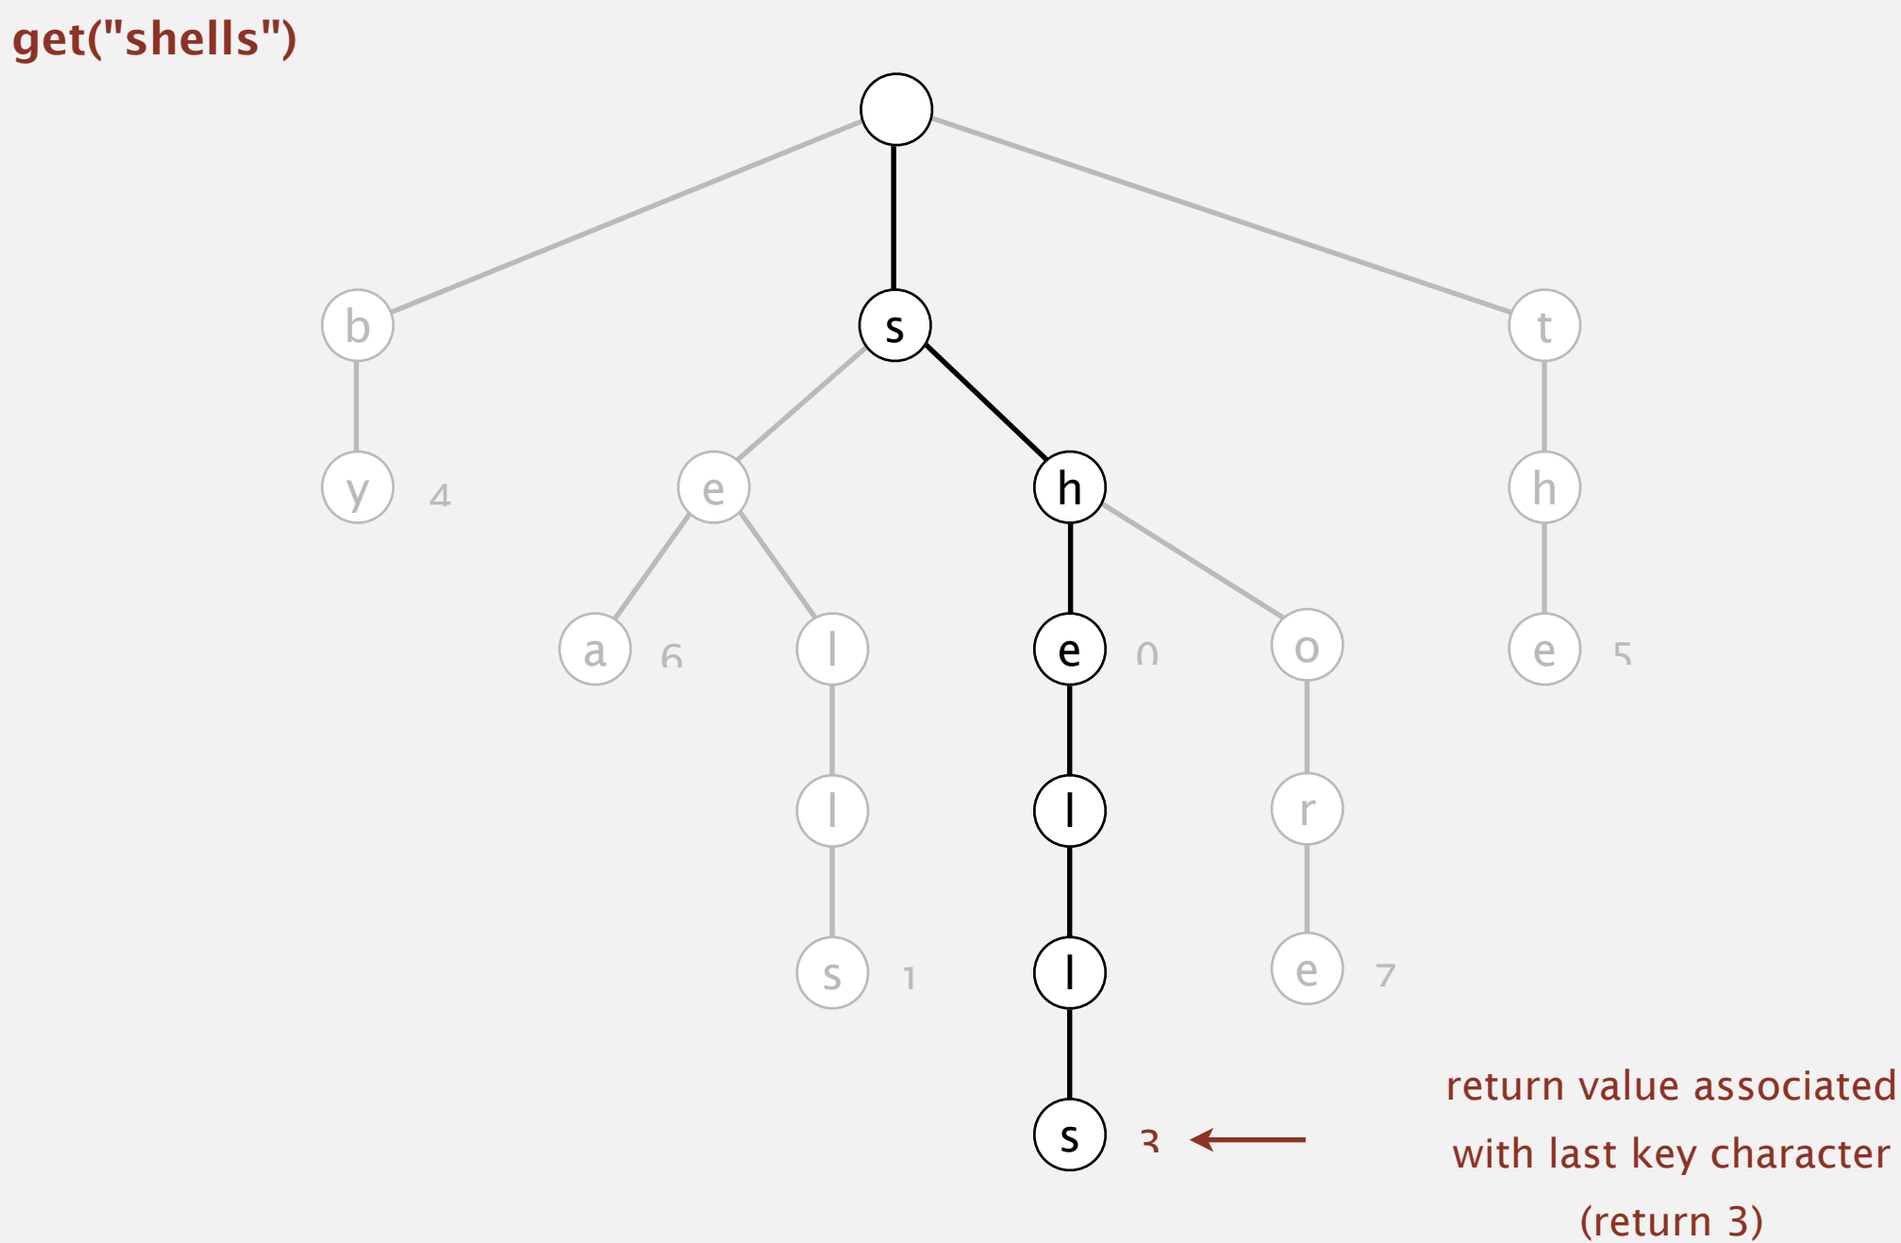

Search in a trie

Follow links corresponding to each character in the key.

- Search hit: node where search ends has a non-null value.
- Search miss: reach a null link or node where search ends has null value.

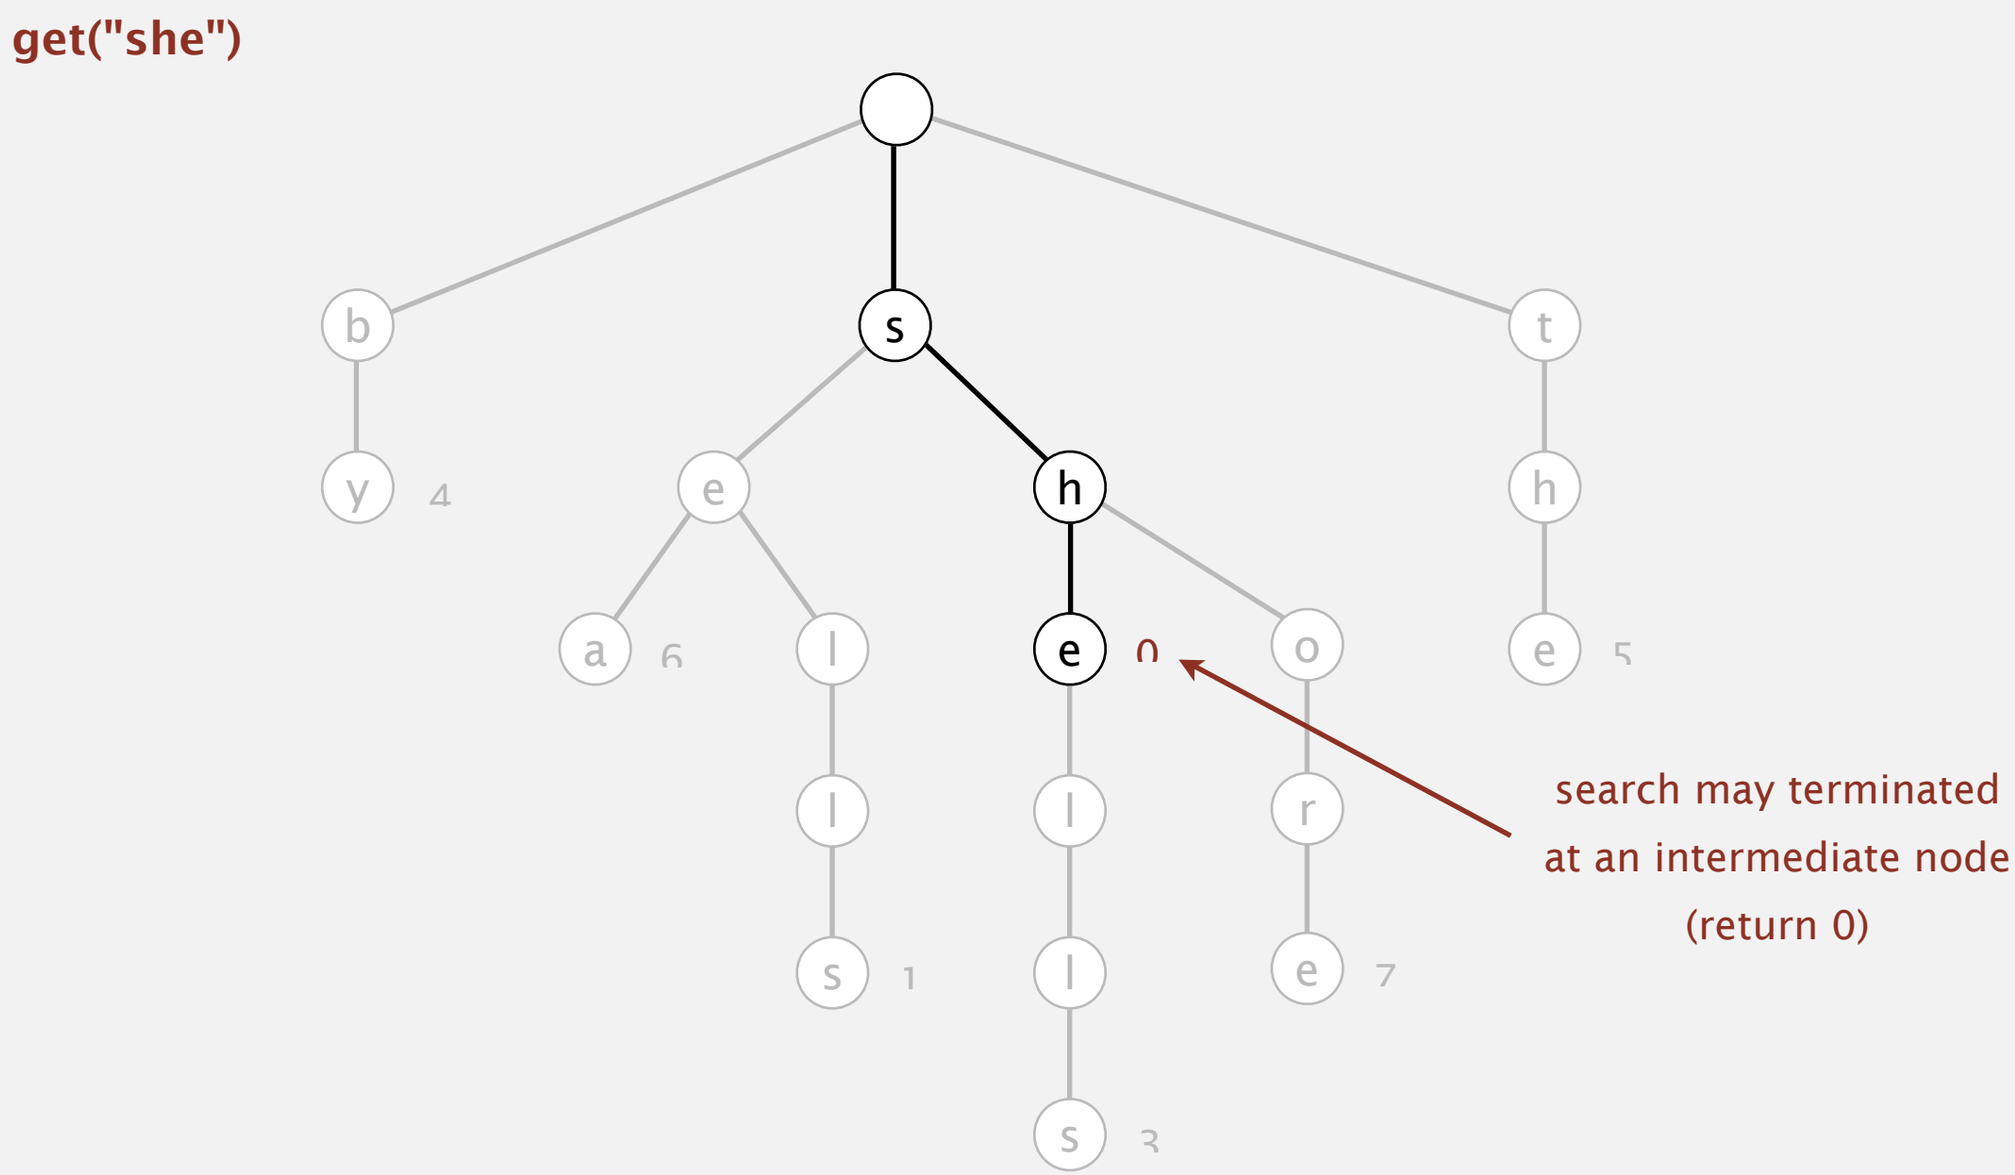

Search in a trie

Follow links corresponding to each character in the key.

- Search hit: node where search ends has a non-null value.
- Search miss: reach a null link or node where search ends has null value.

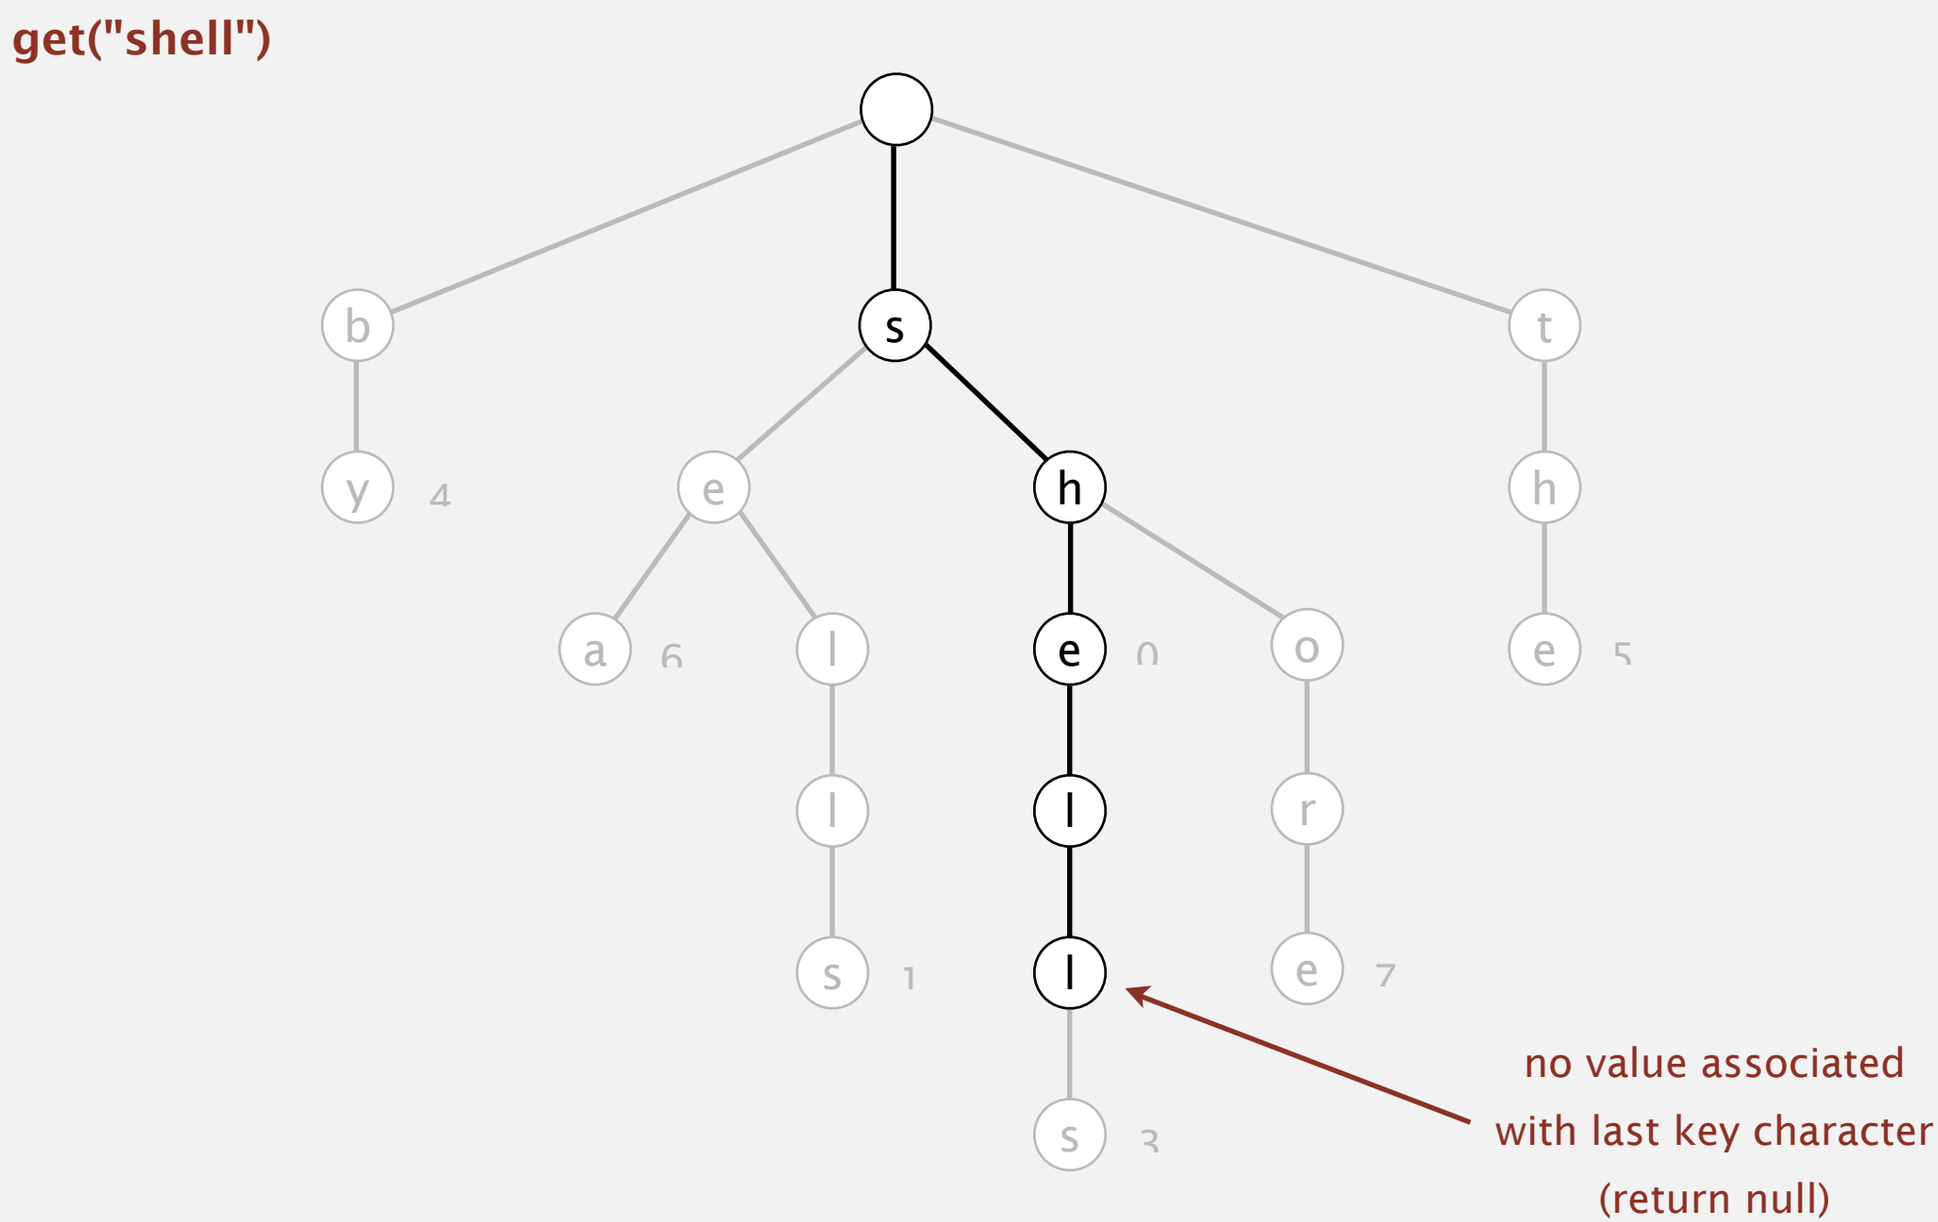

Search in a trie

Follow links corresponding to each character in the key.

- Search hit: node where search ends has a non-null value.
- Search miss: reach a null link or node where search ends has null value.

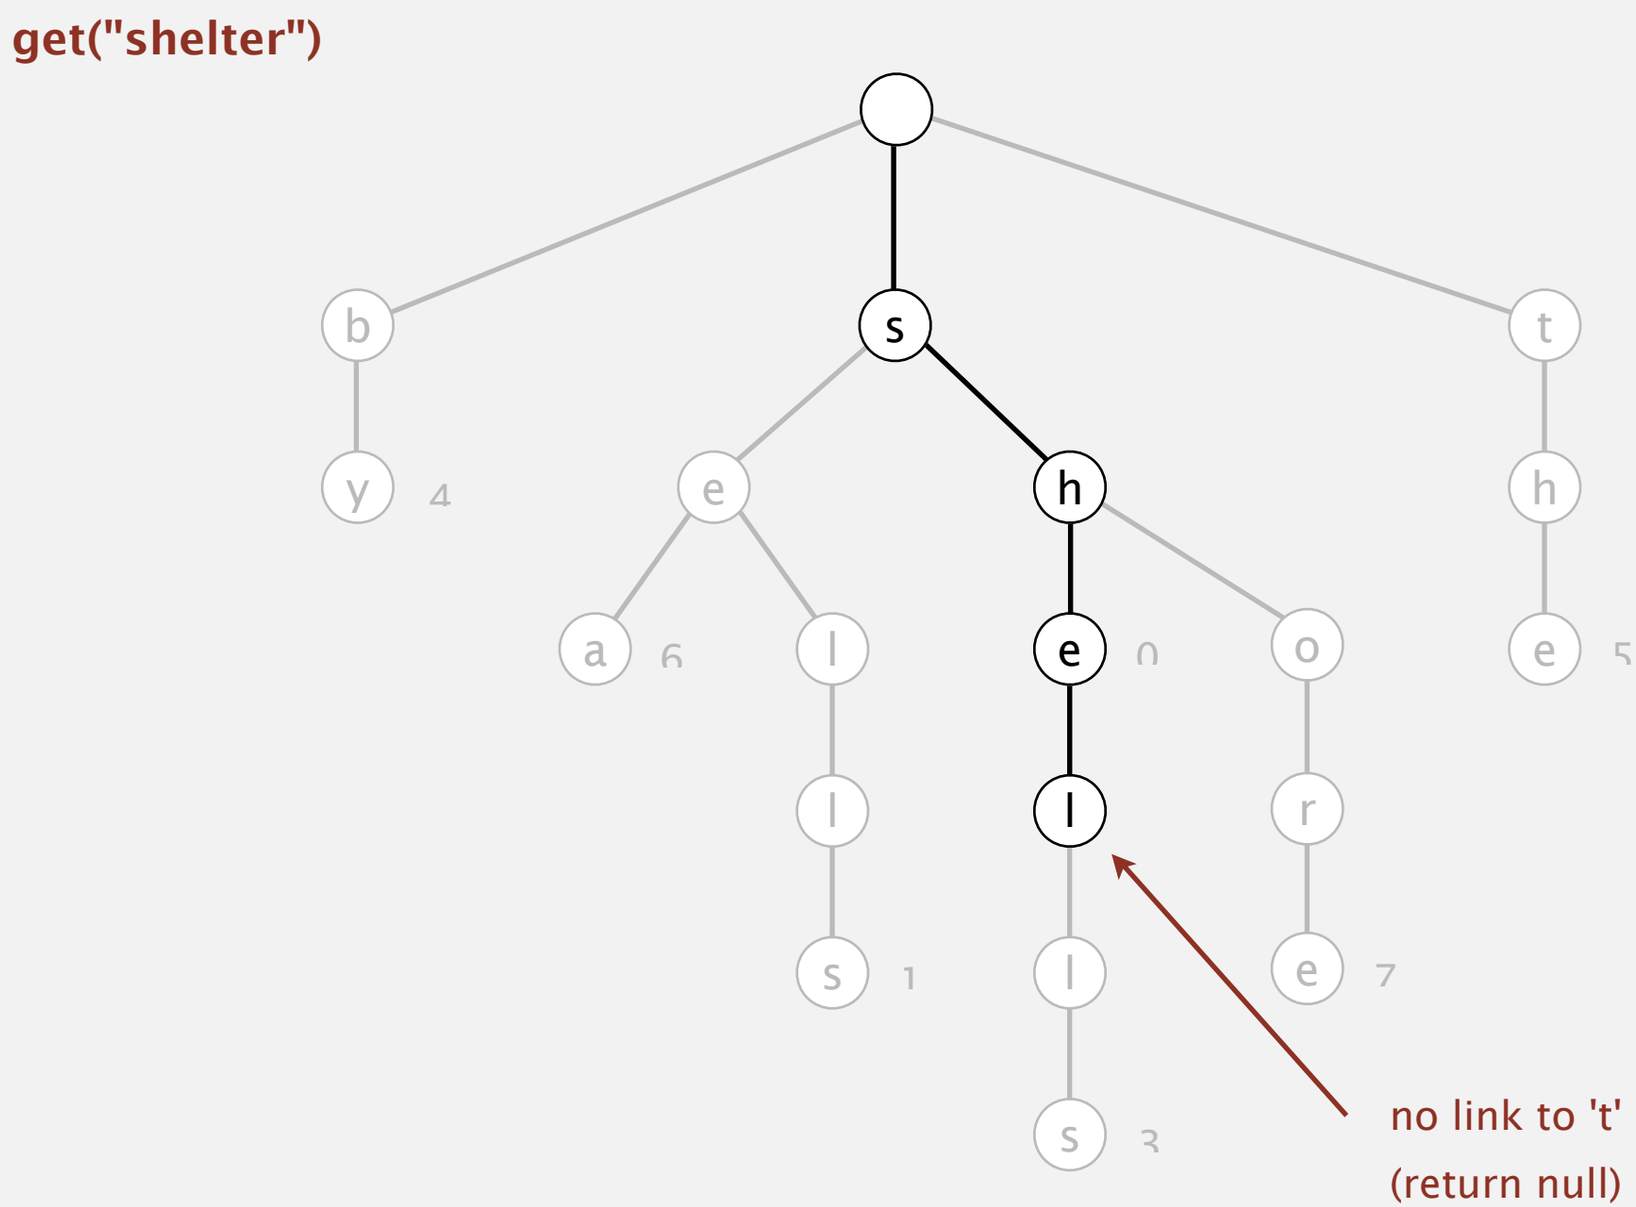

Insertion into a trie

Follow links corresponding to each character in the key.

- Encounter a null link: create new node.
- Encounter the last character of the key: set value in that node.

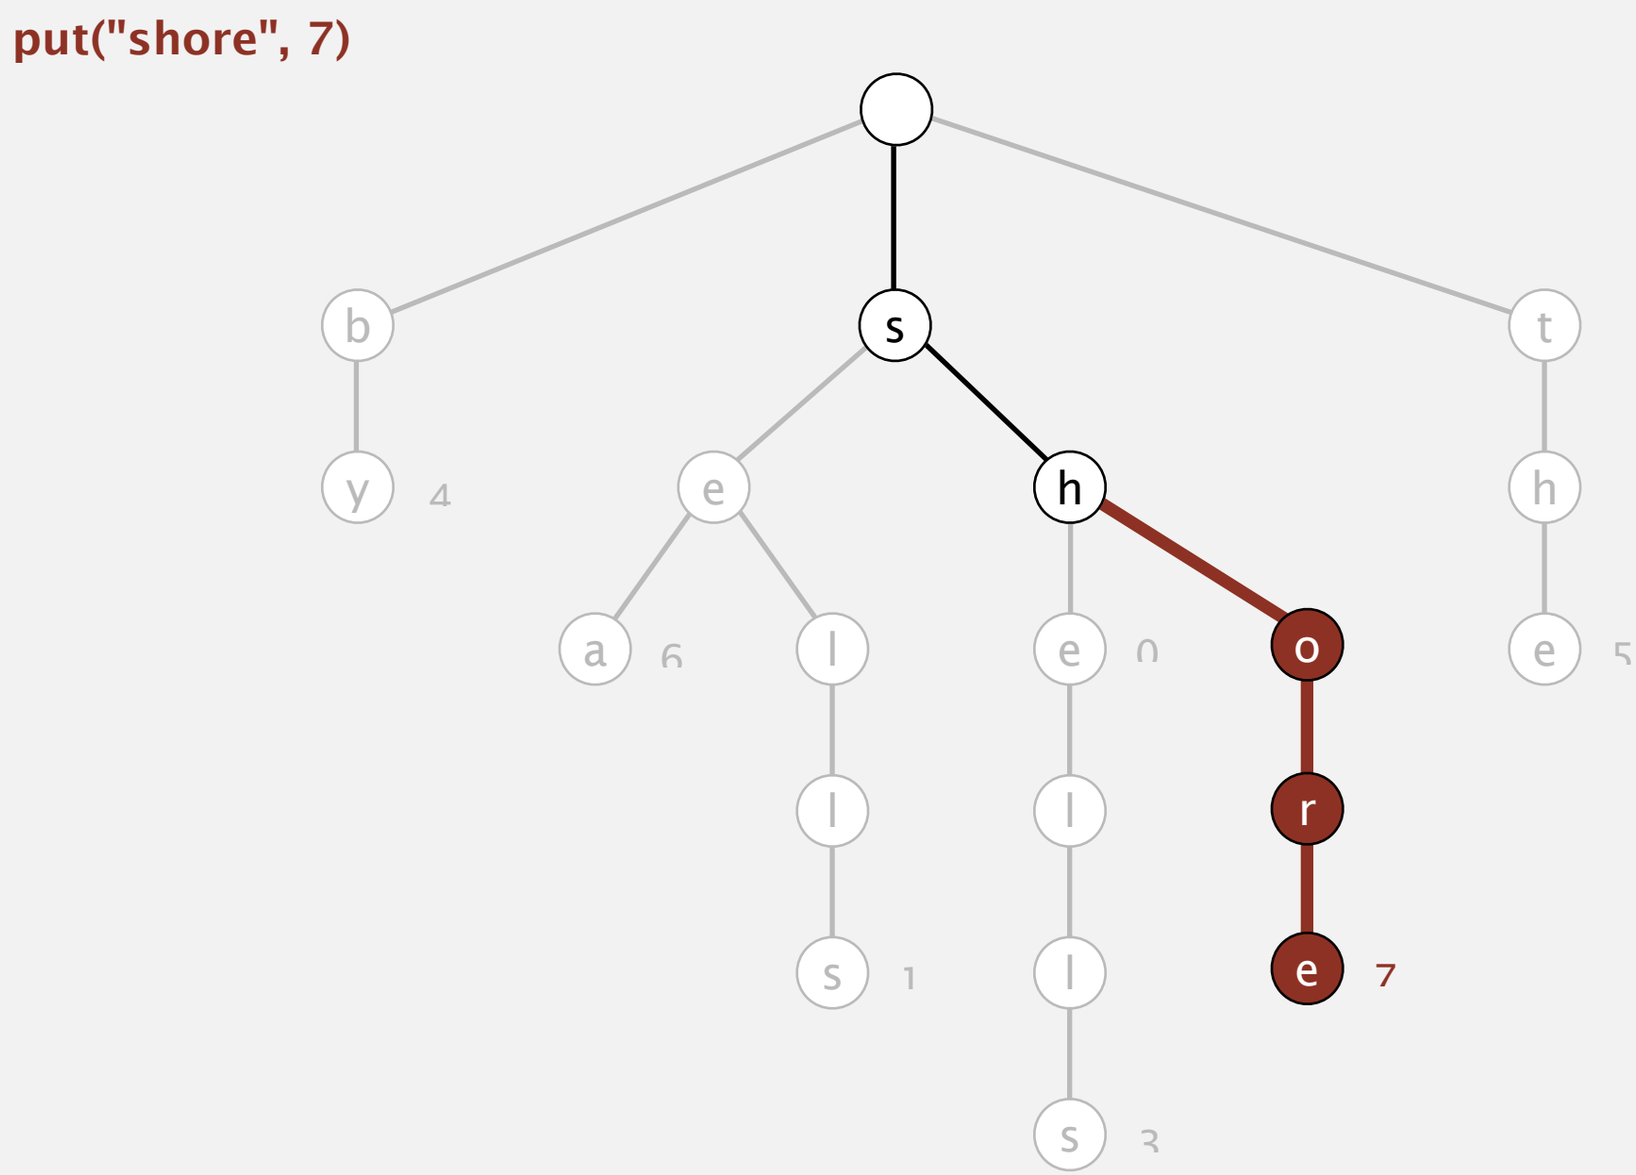

Trie construction demo

trie

Trie construction demo

put("she", 0)

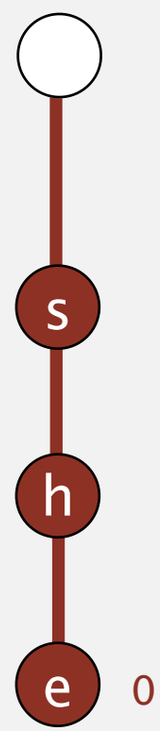

key is sequence of characters from root to value

value is in node corresponding to last character

Trie construction demo

trie



Trie construction demo

trie

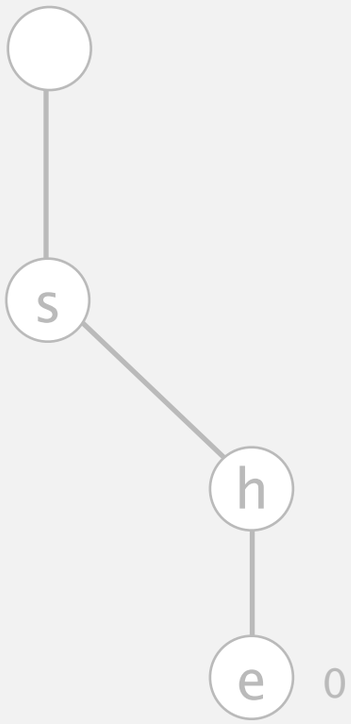

Trie construction demo

put("sells", 1)

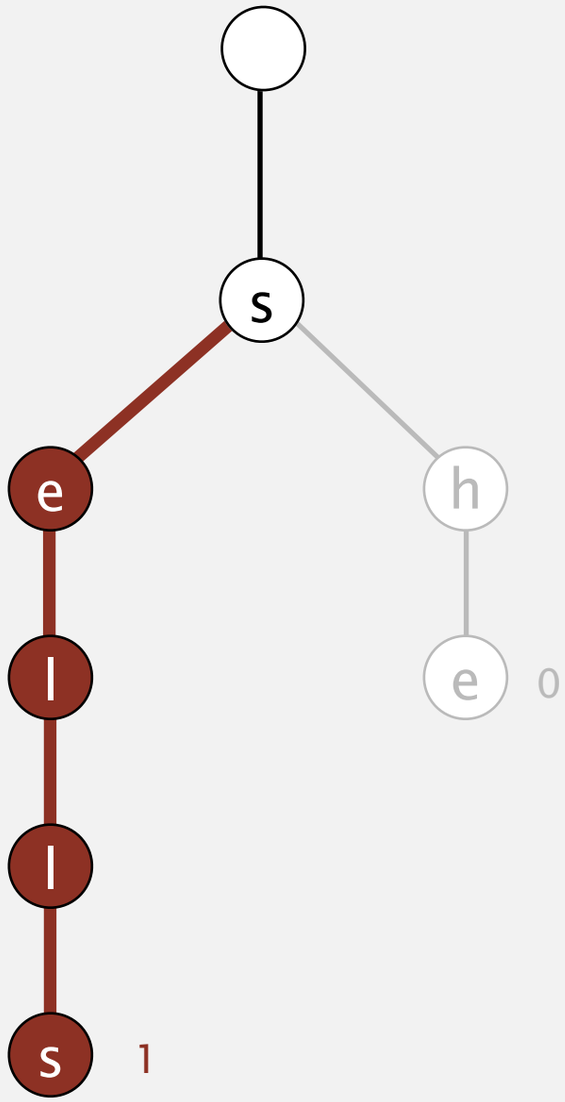

Trie construction demo

trie

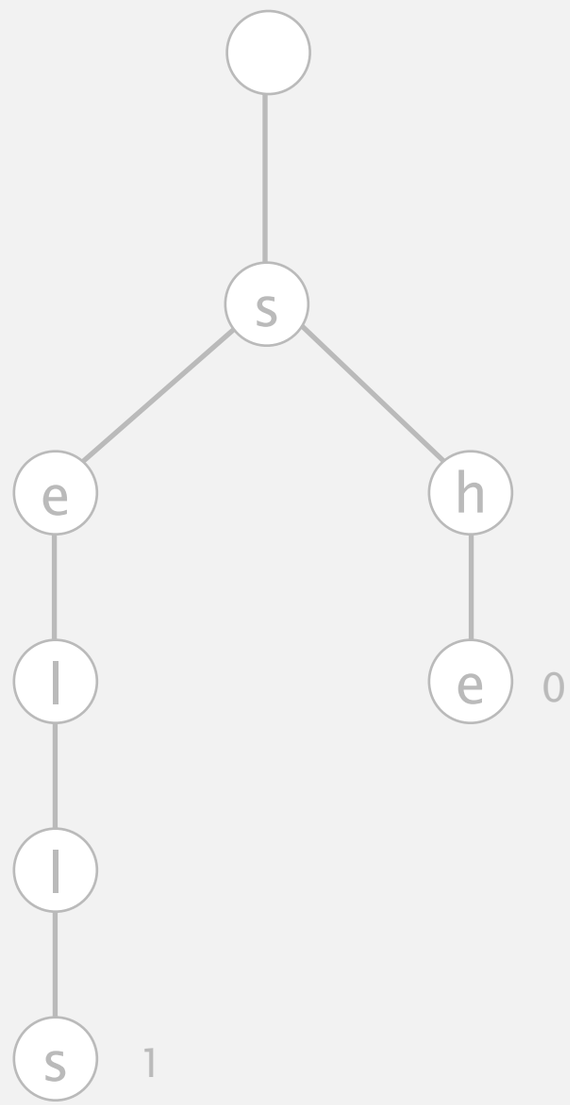

Trie construction demo

trie

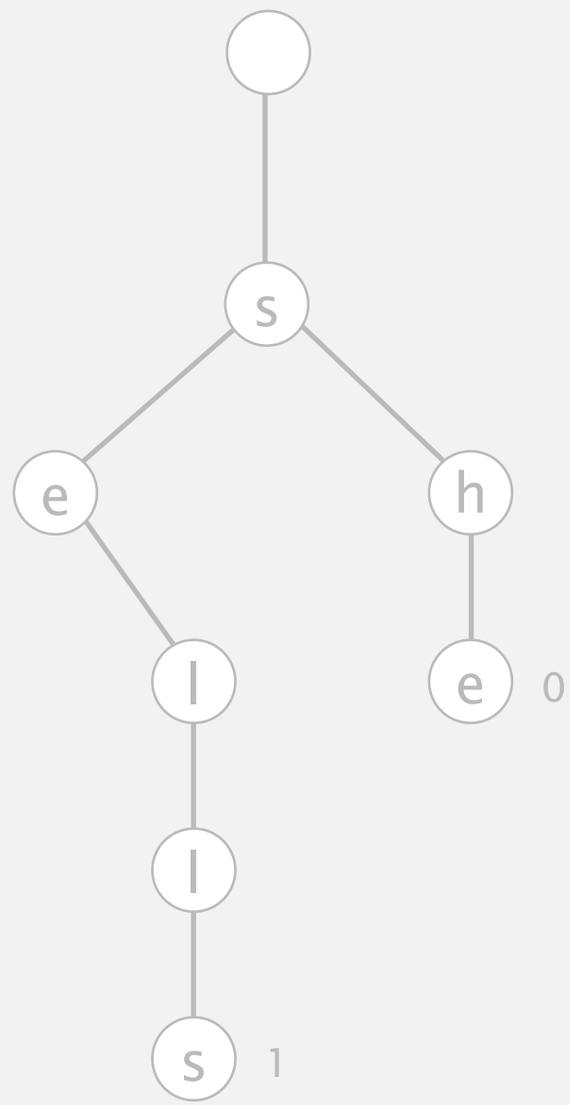

Trie construction demo

put("sea", 2)

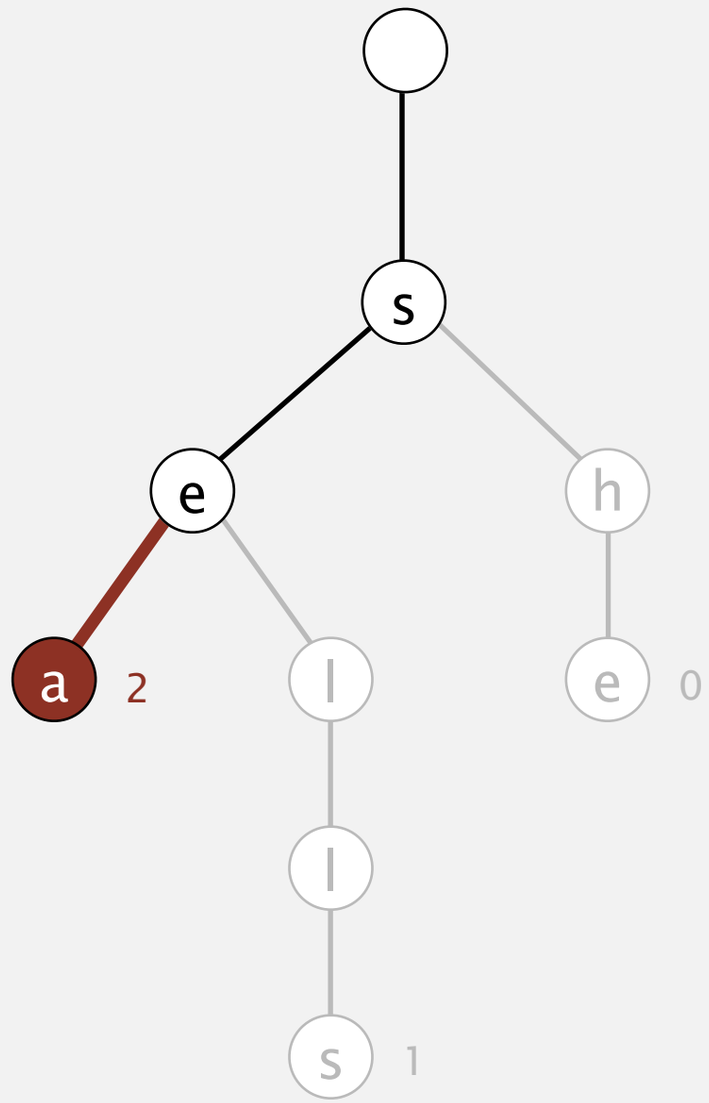

Trie construction demo

trie

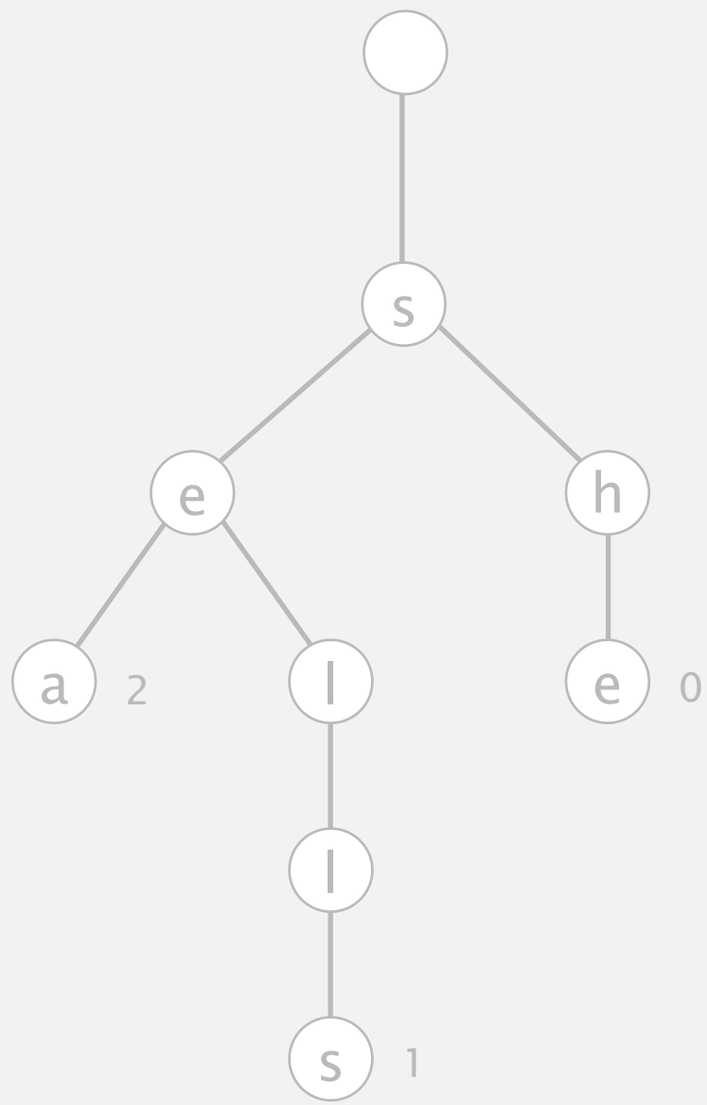

Trie construction demo

put("shells", 3)

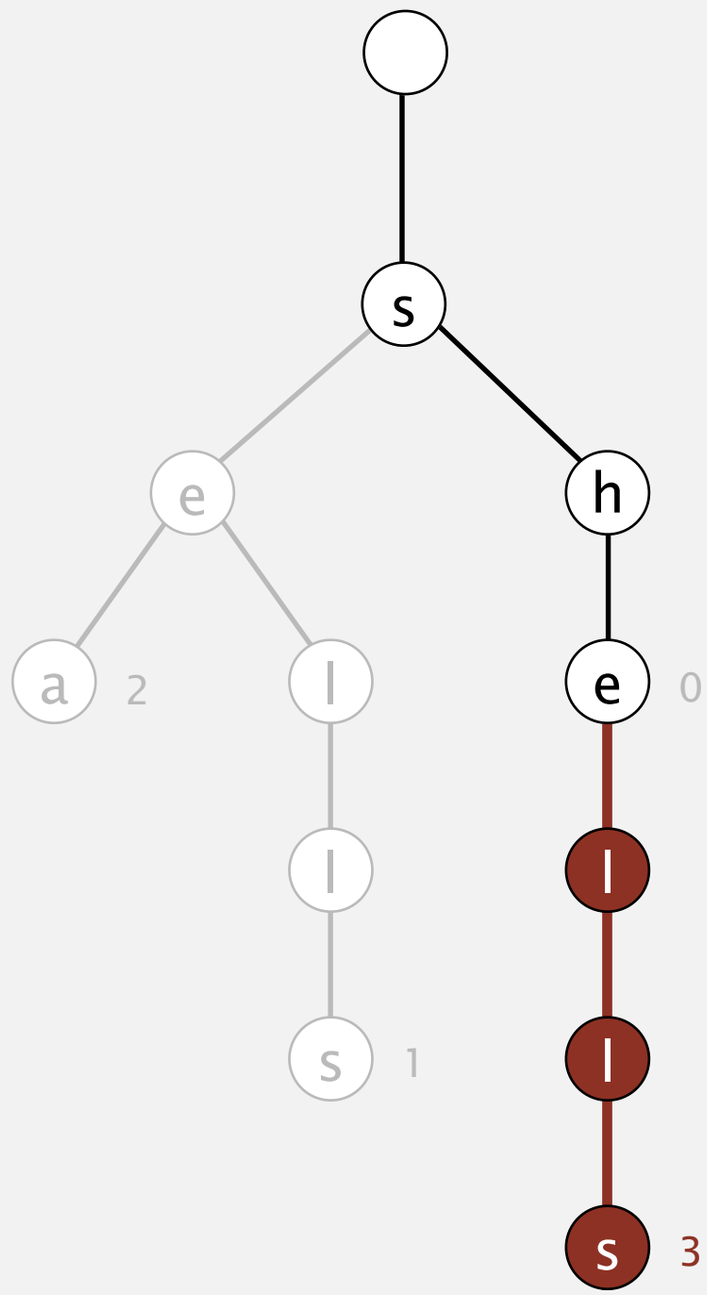

Trie construction demo

trie

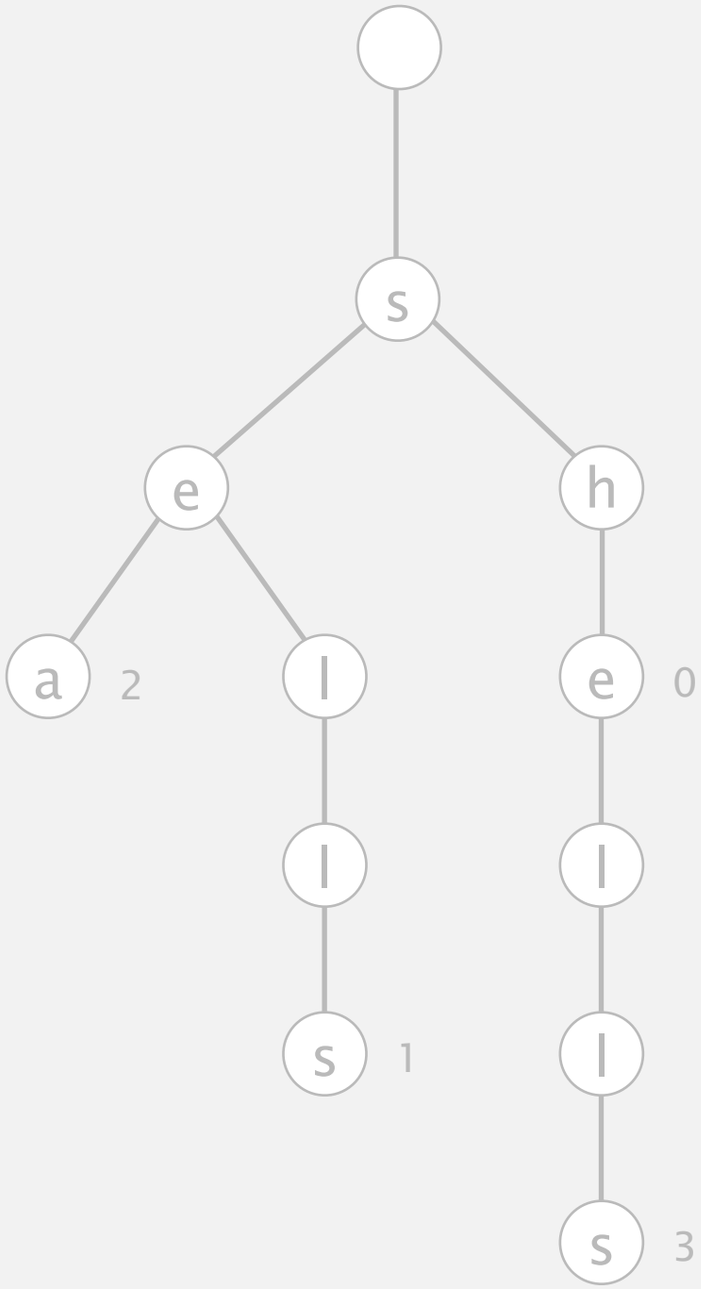

Trie construction demo

put("by", 4)

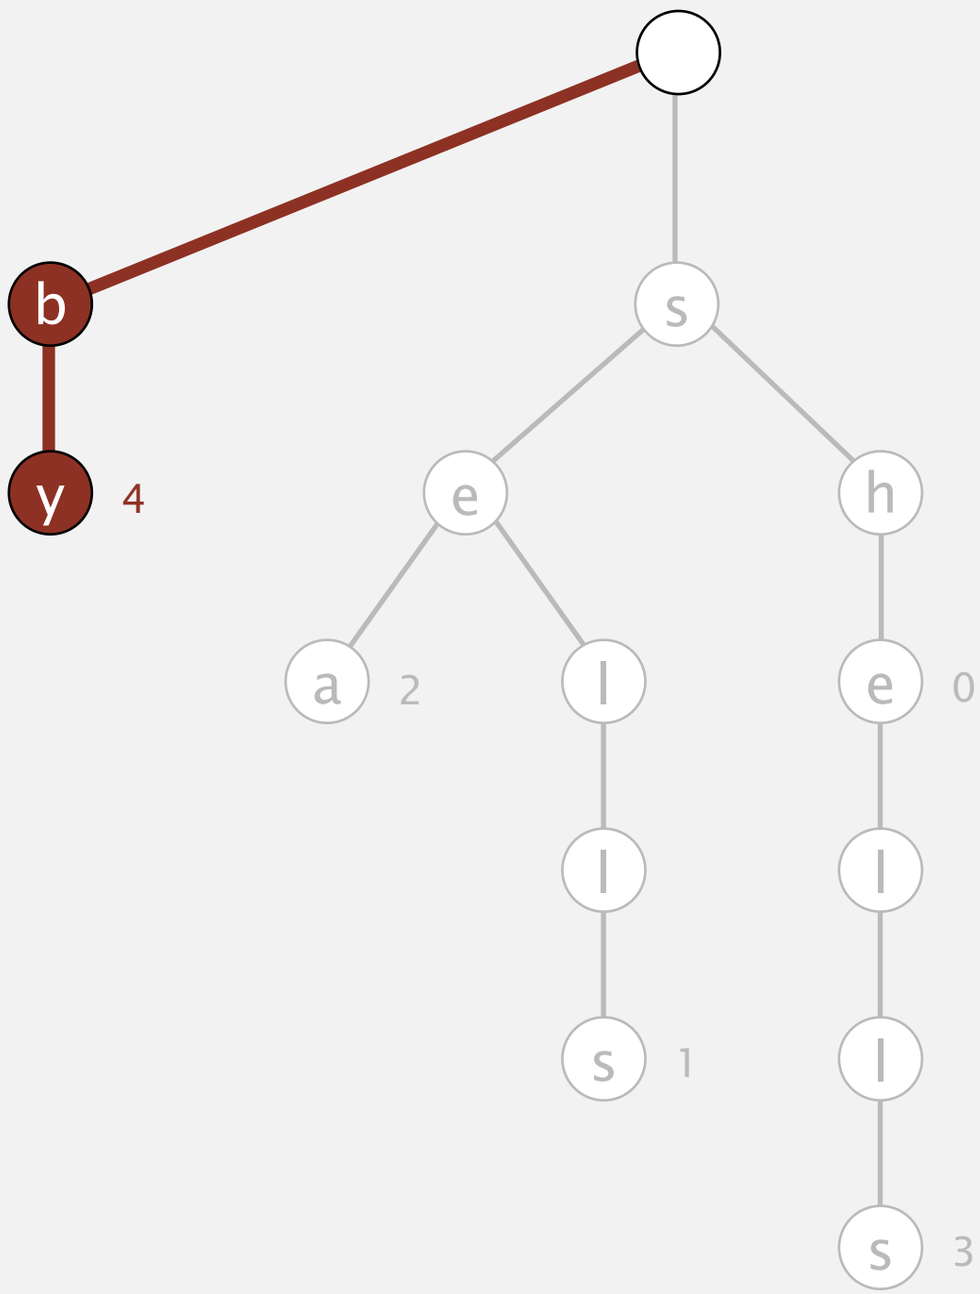

Trie construction demo

trie

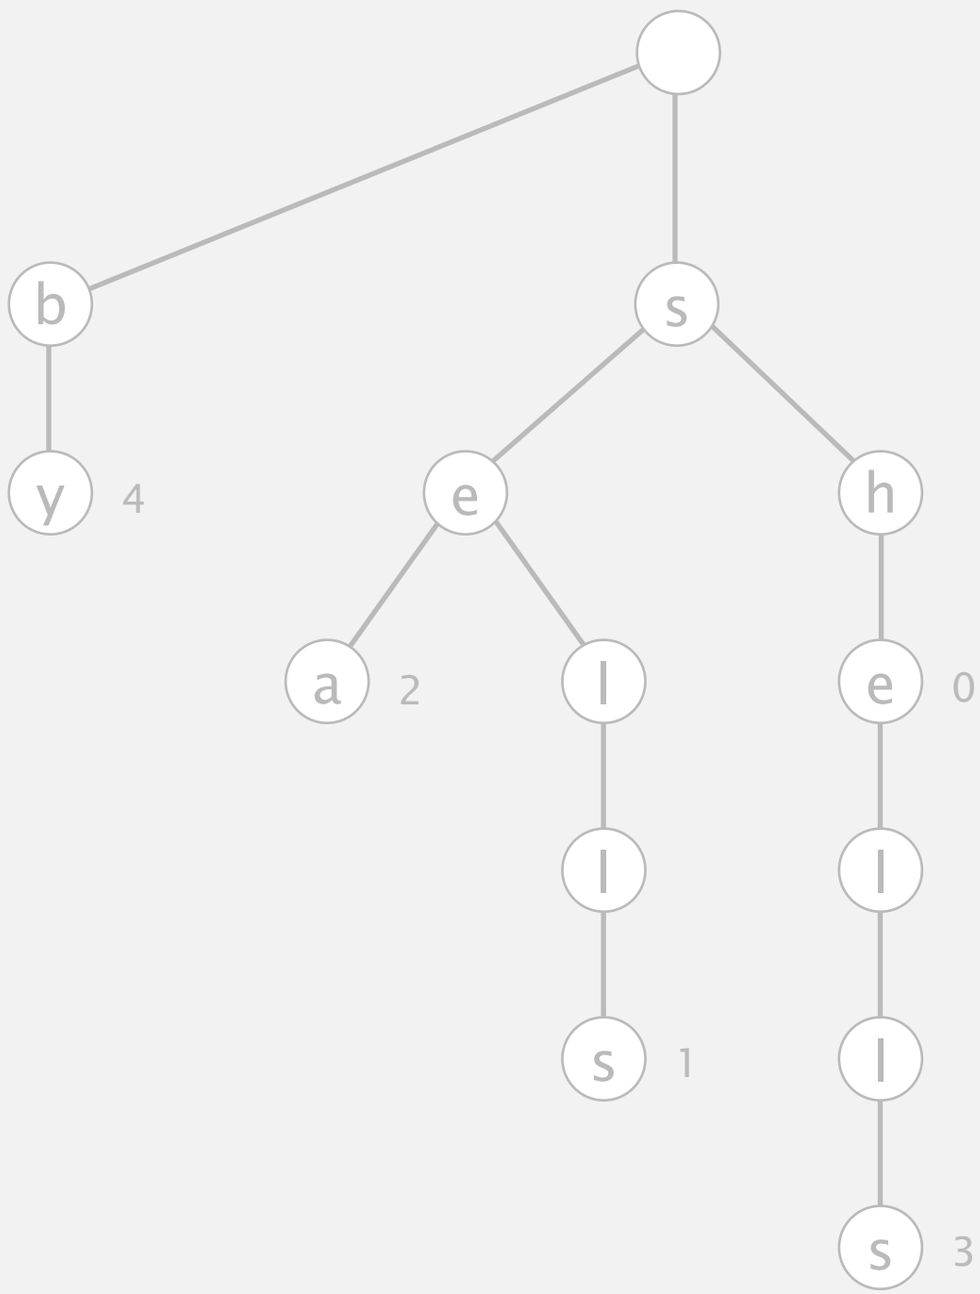

Trie construction demo

put("the", 5)

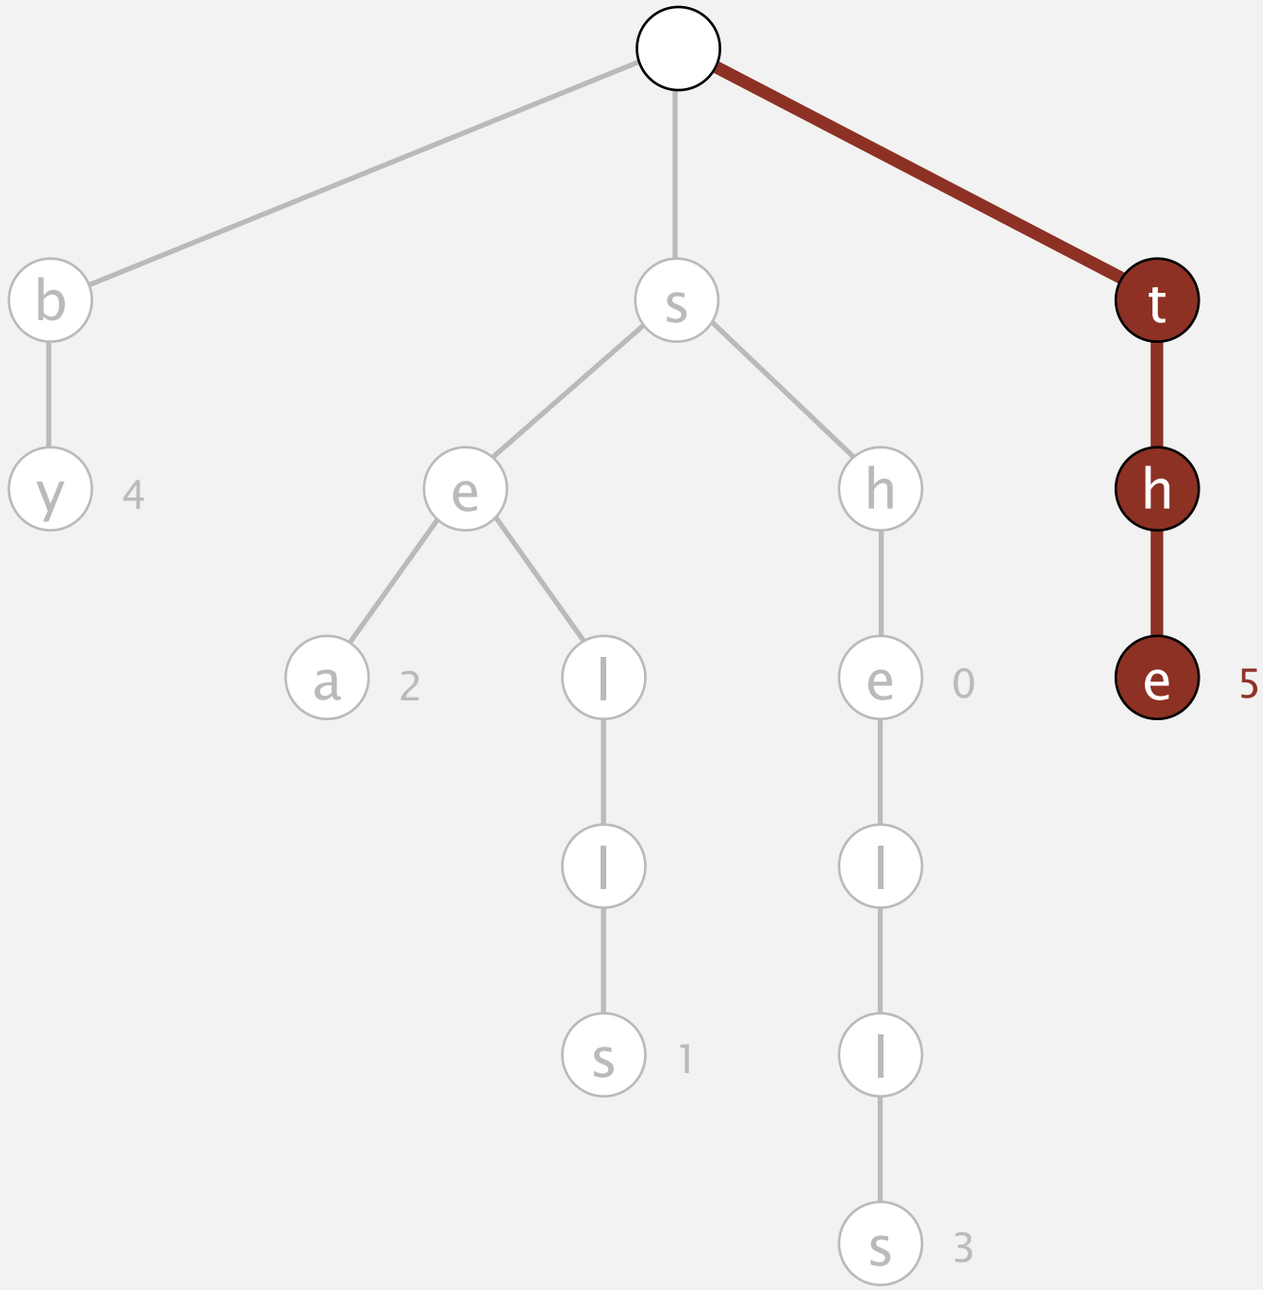

Trie construction demo

trie

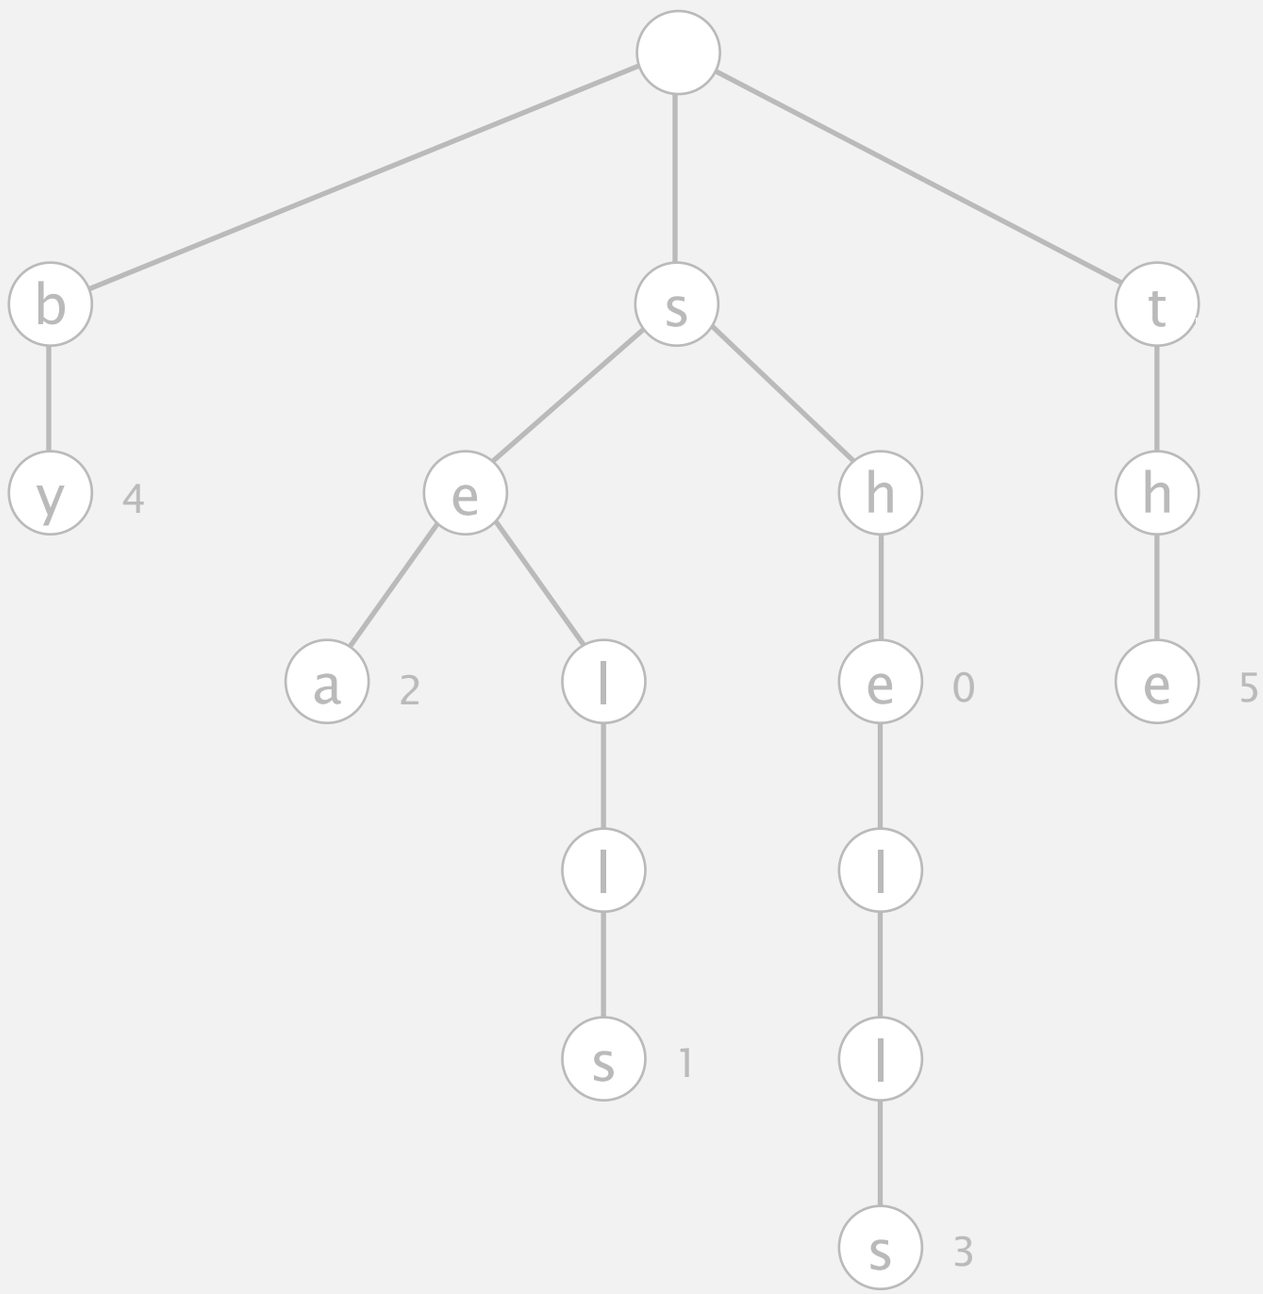

Trie construction demo

put("sea", 6)

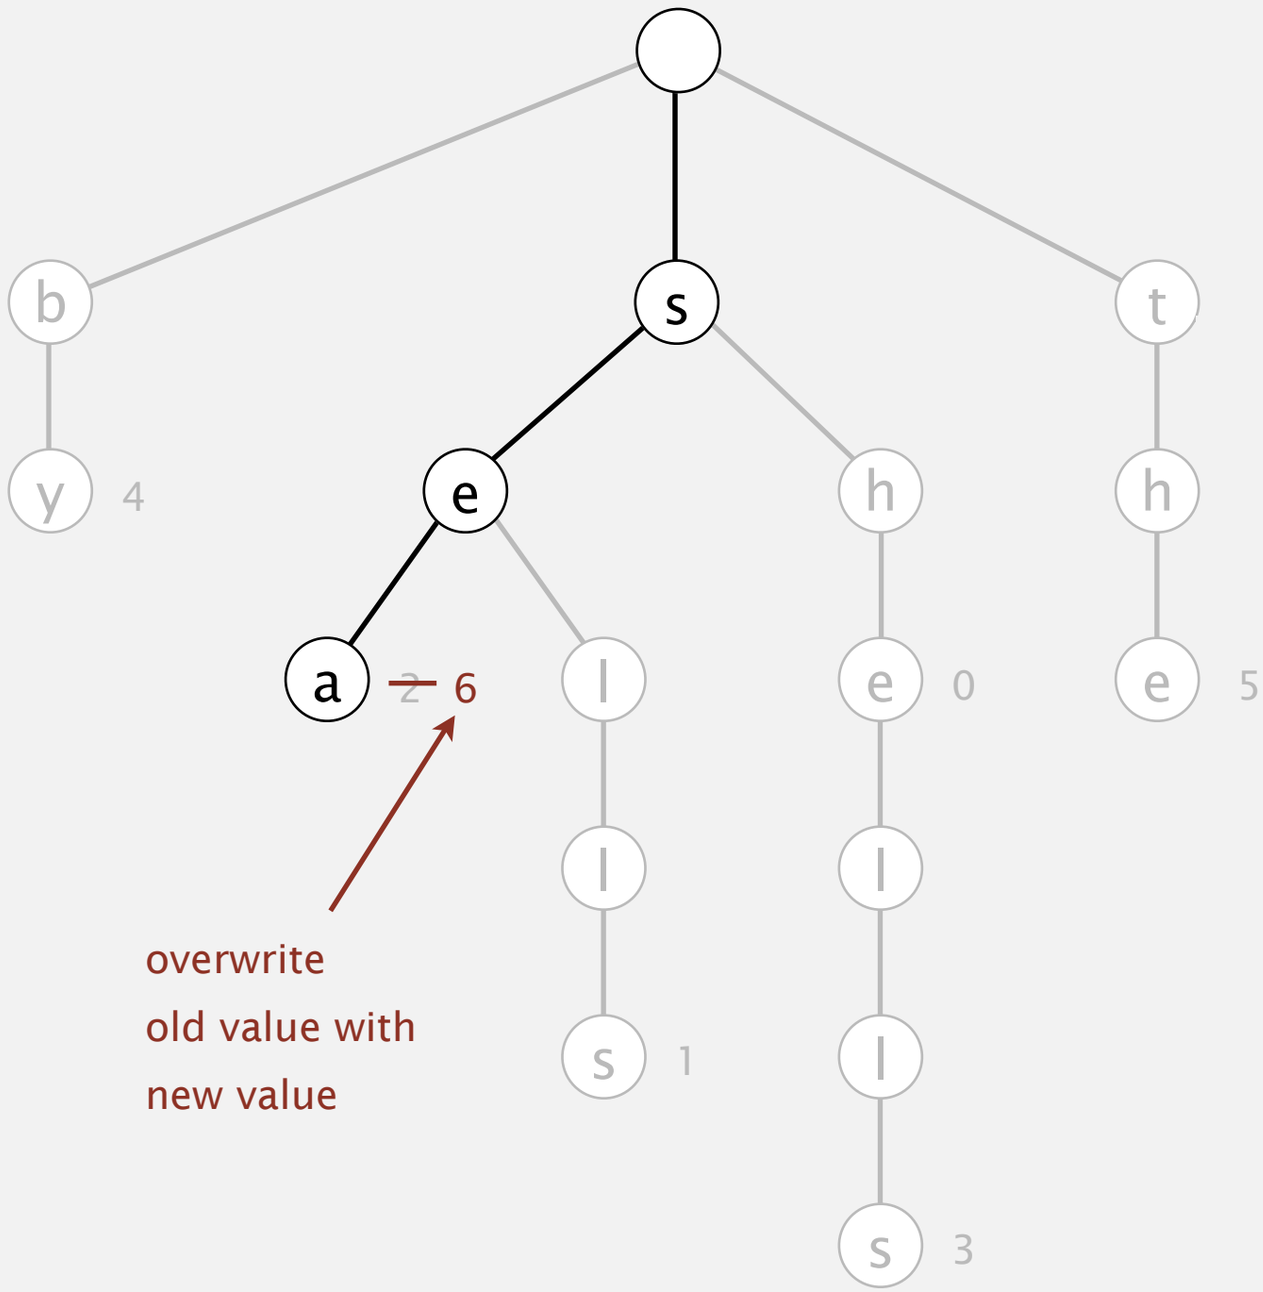

overwrite
old value with
new value

Trie construction demo

trie

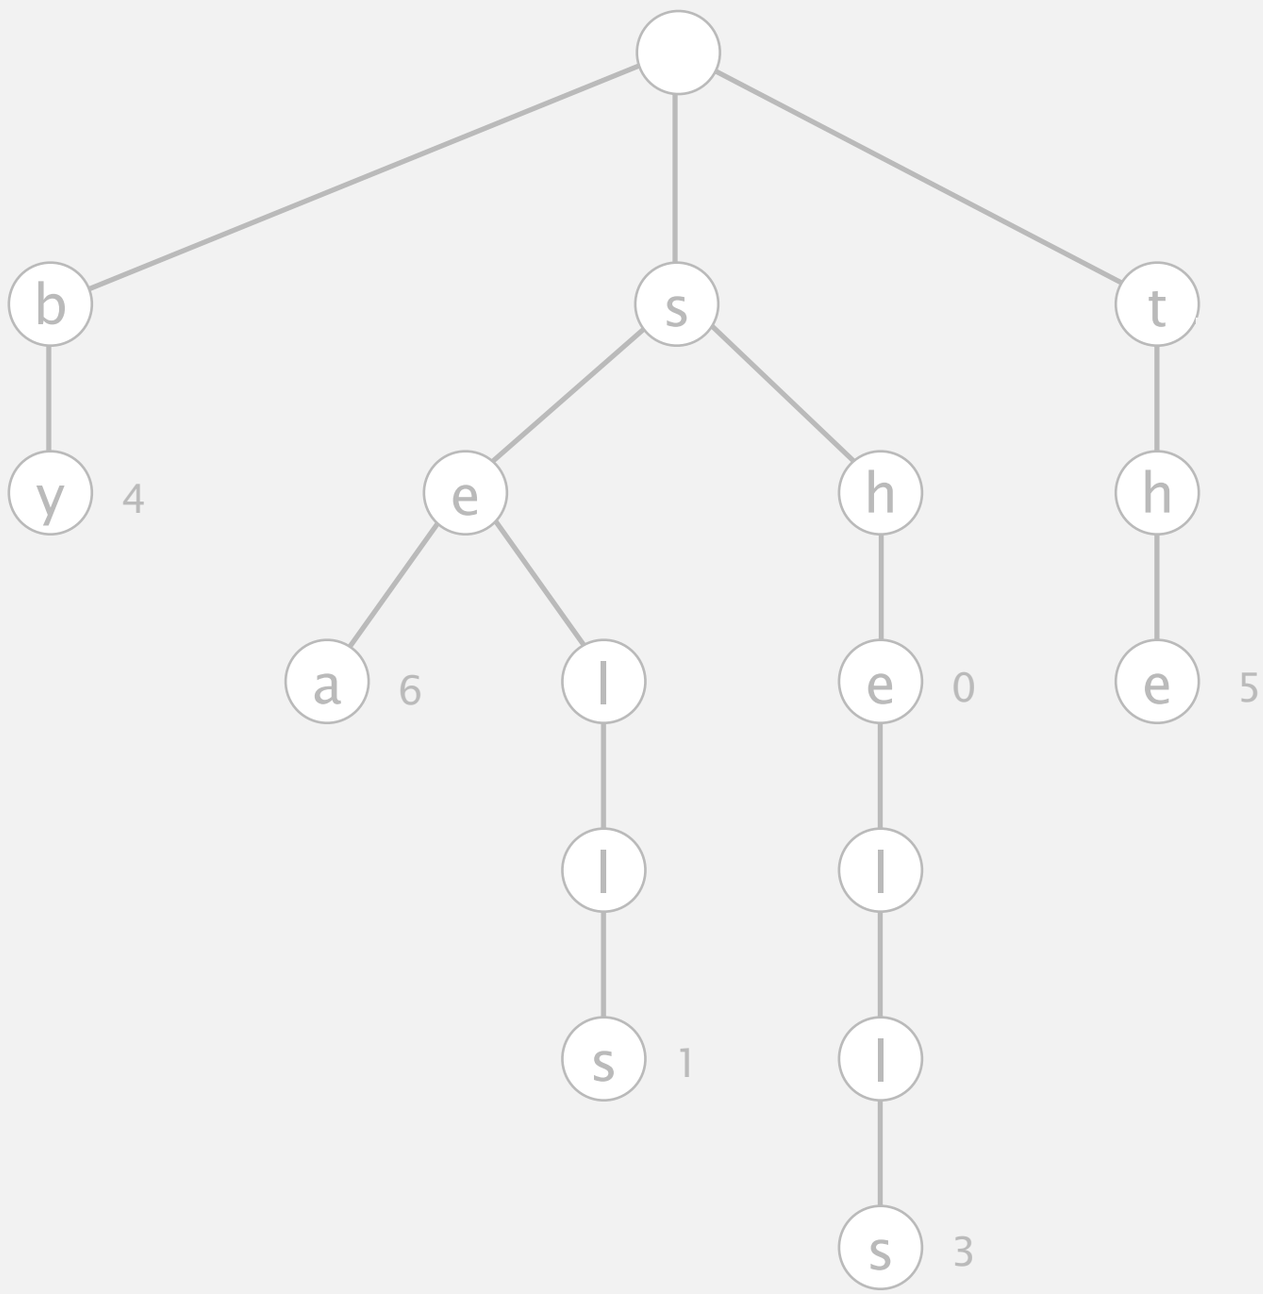

Trie construction demo

trie

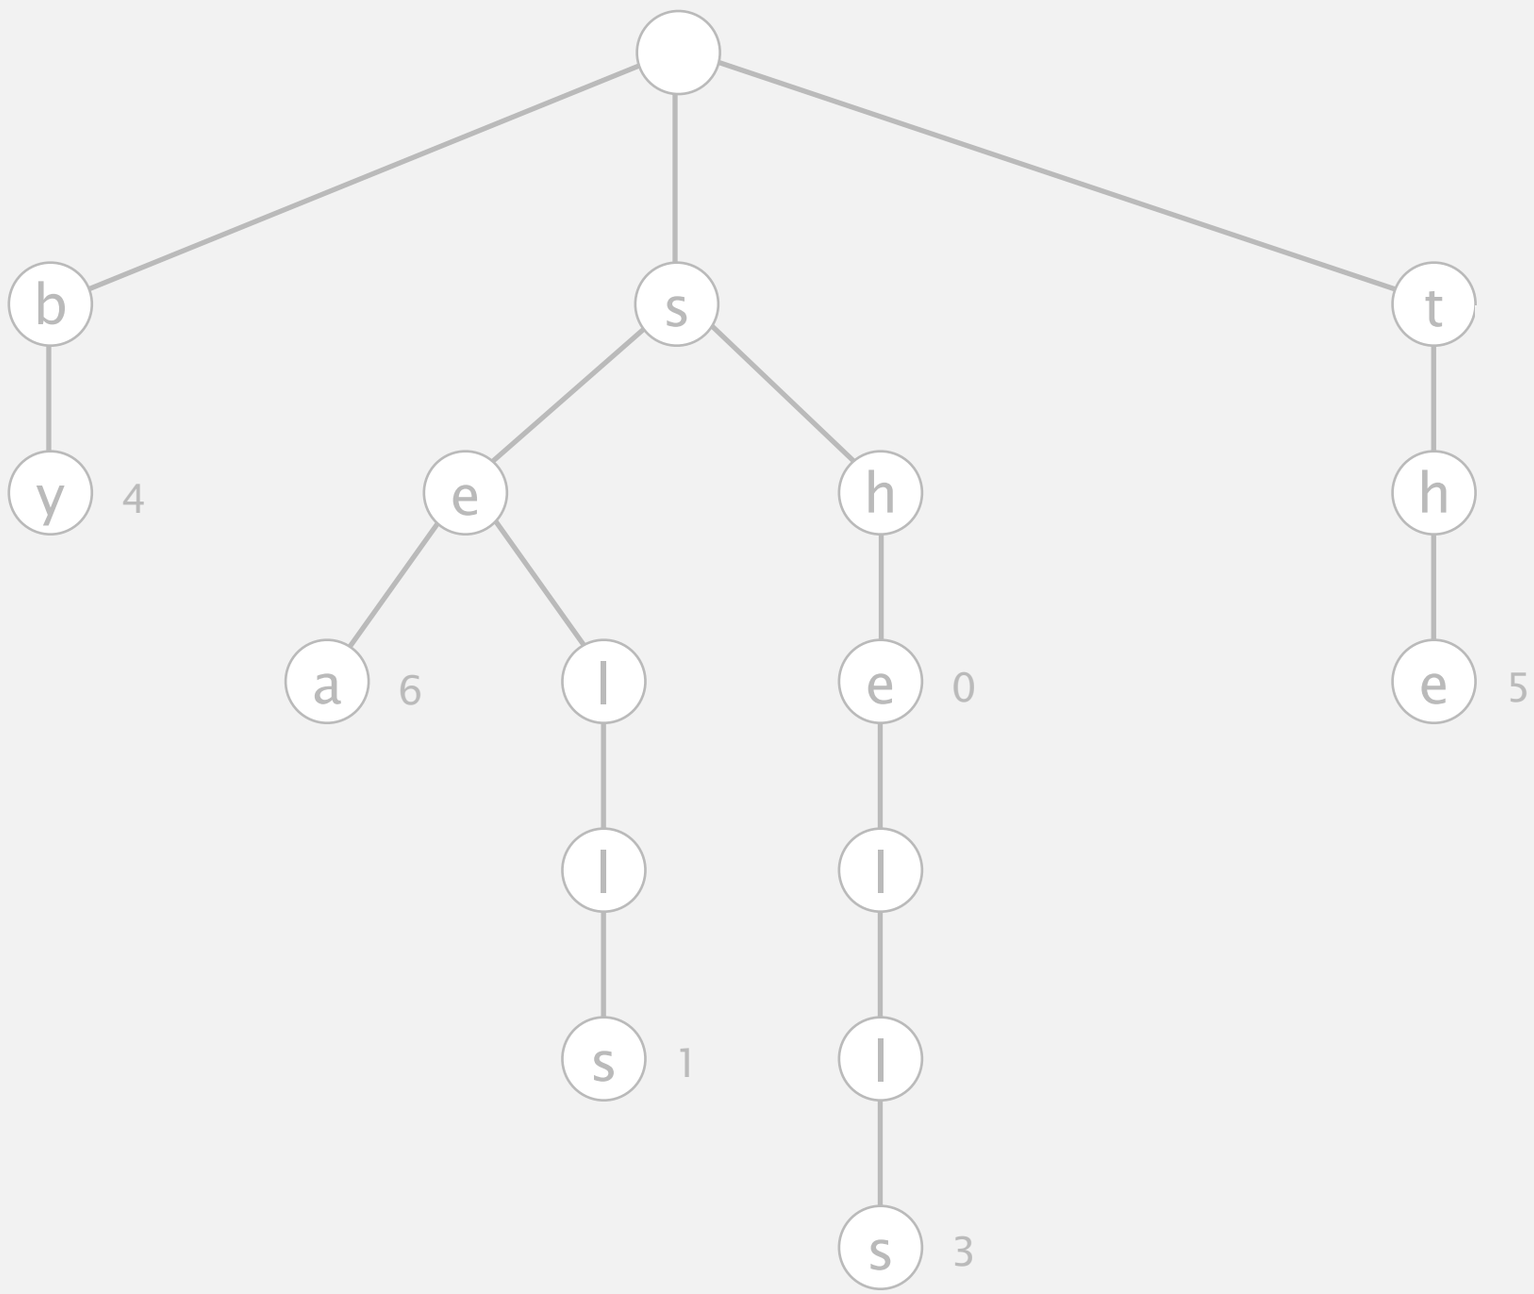

Trie construction demo

put("shore", 7)

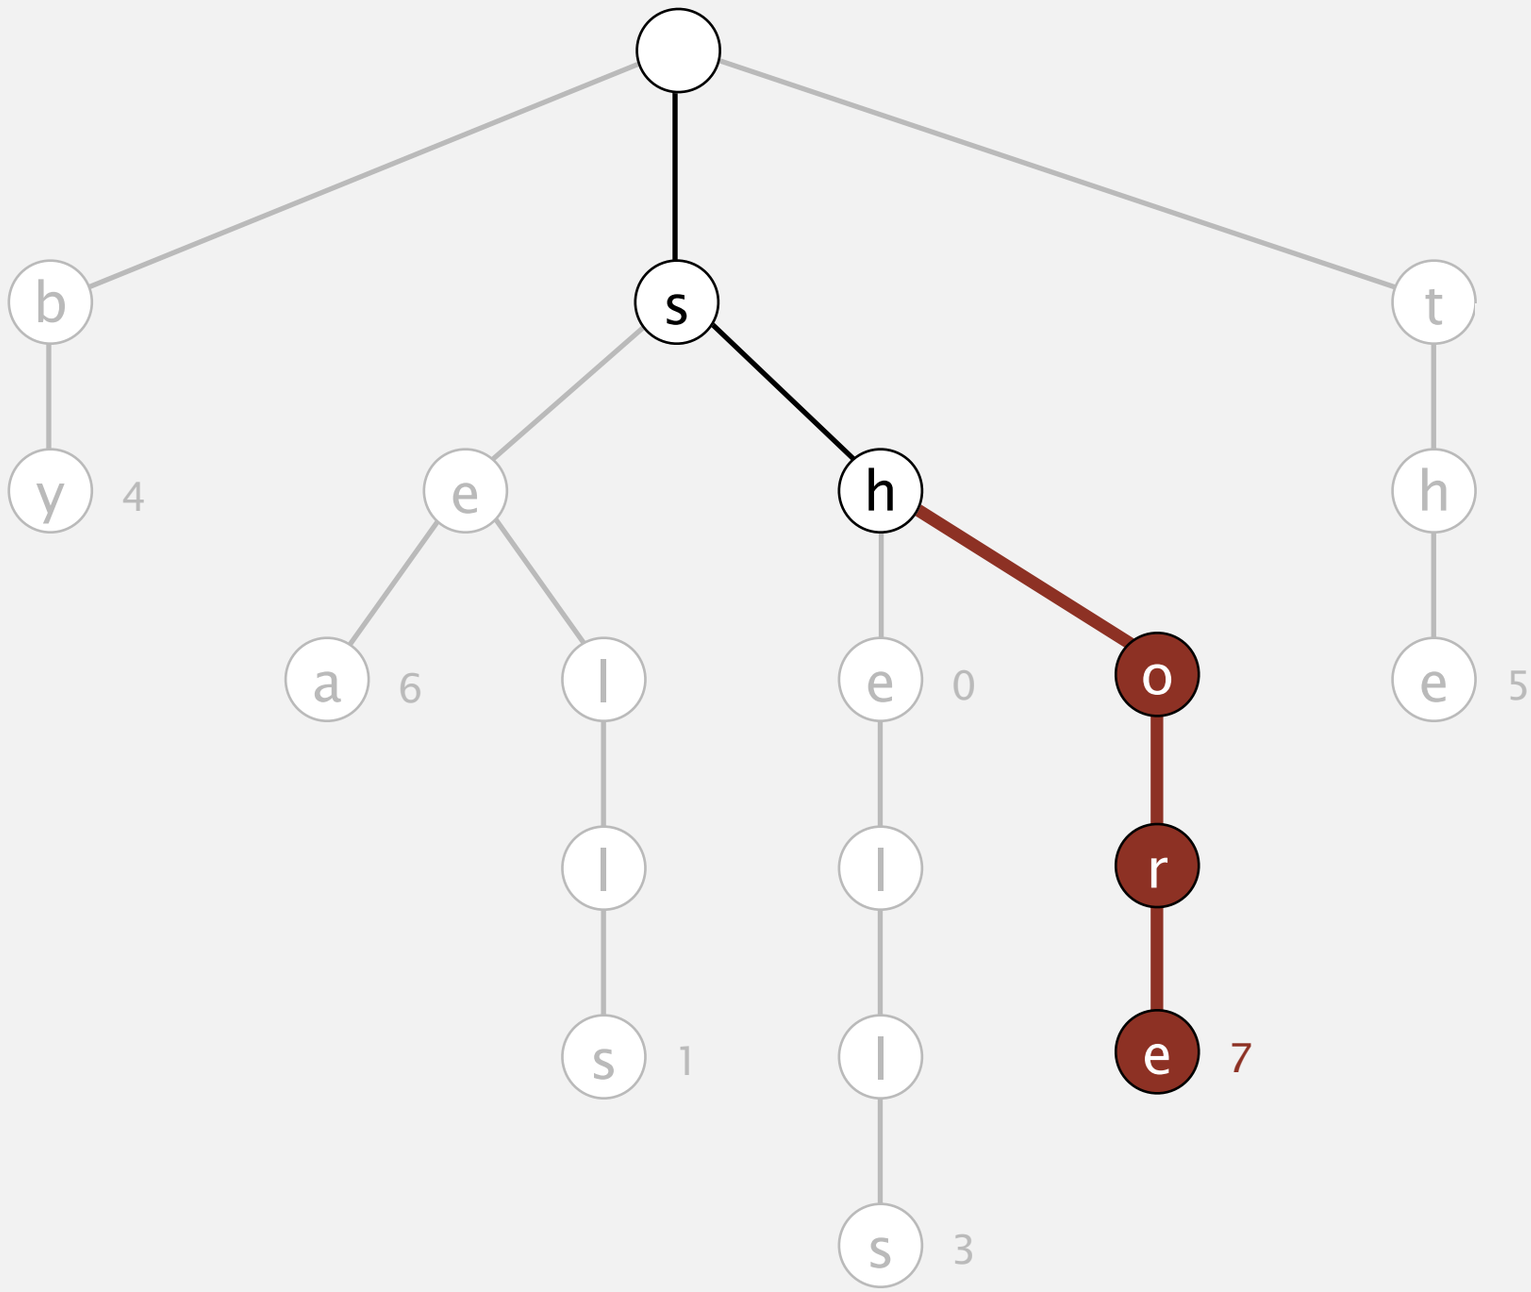

Trie construction demo

trie

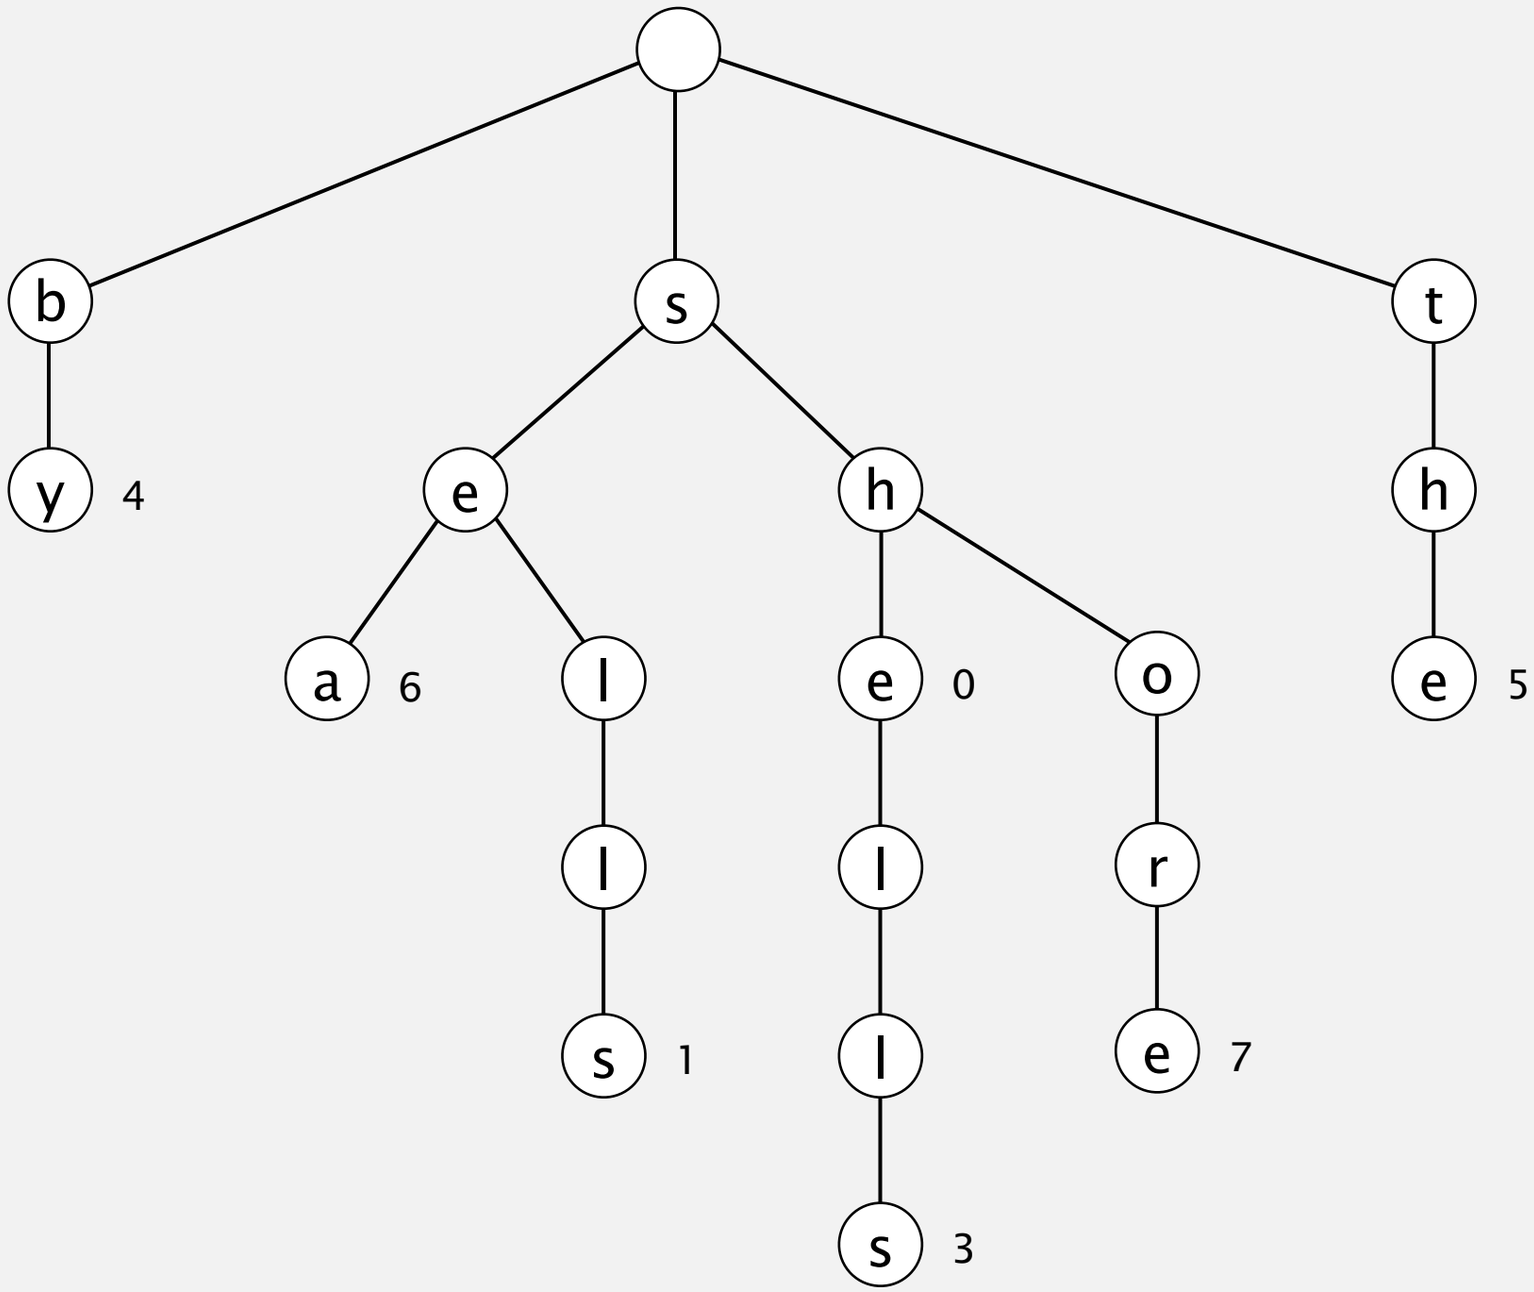

Trie representation: Java implementation

Node. A value, plus references to R nodes.

```
private static class Node
{
   private Object value;
   private Node[] next = new Node[R];
}
```

use `Object` instead of `Value` since no generic array creation in Java

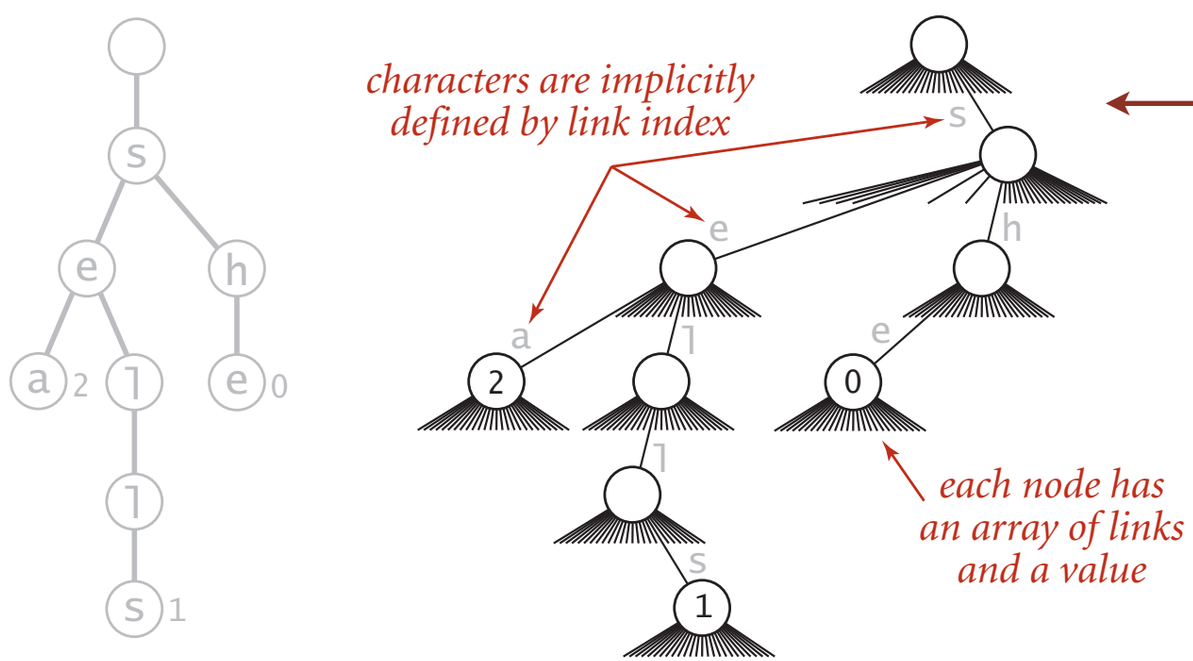

Trie representation

neither keys nor characters are explicitly stored

R-way trie: Java implementation

```
public class TrieST<Value>
{
   private static final int R = 256;     ← extended ASCII
   private Node root;

   private static class Node
   {  /* see previous slide */  }

   public void put(String key, Value val)
   {  root = put(root, key, val, 0);  }

   private Node put(Node x, String key, Value val, int d)
   {
      if (x == null) x = new Node();
      if (d == key.length()) { x.val = val; return x; }
      char c = key.charAt(d);
      x.next[c] = put(x.next[c], key, val, d+1);
      return x;
   }

   ⋮
```

R-way trie: Java implementation (continued)

```
⋮
public boolean contains(String key)
{  return get(key) != null;  }

public Value get(String key)
{
   Node x = get(root, key, 0);
   if (x == null) return null;
   return (Value) x.val;
}

   private Node get(Node x, String key, int d)
   {
      if (x == null) return null;
      if (d == key.length()) return x;
      char c = key.charAt(d);
      return get(x.next[c], key, d+1);
   }

}
```

cast needed

Trie performance

Search hit. Need to examine all L characters for equality.

Search miss.

- Could have mismatch on first character.
- Typical case: examine only a few characters (sublinear).

Space. R null links at each leaf.
(but sublinear space possible if many short strings share common prefixes)

Bottom line. Fast search hit and even faster search miss, but wastes space.

Deletion in an R-way trie

To delete a key-value pair:

- Find the node corresponding to key and set value to null.
- If that node has all null links, remove that node (and recur).

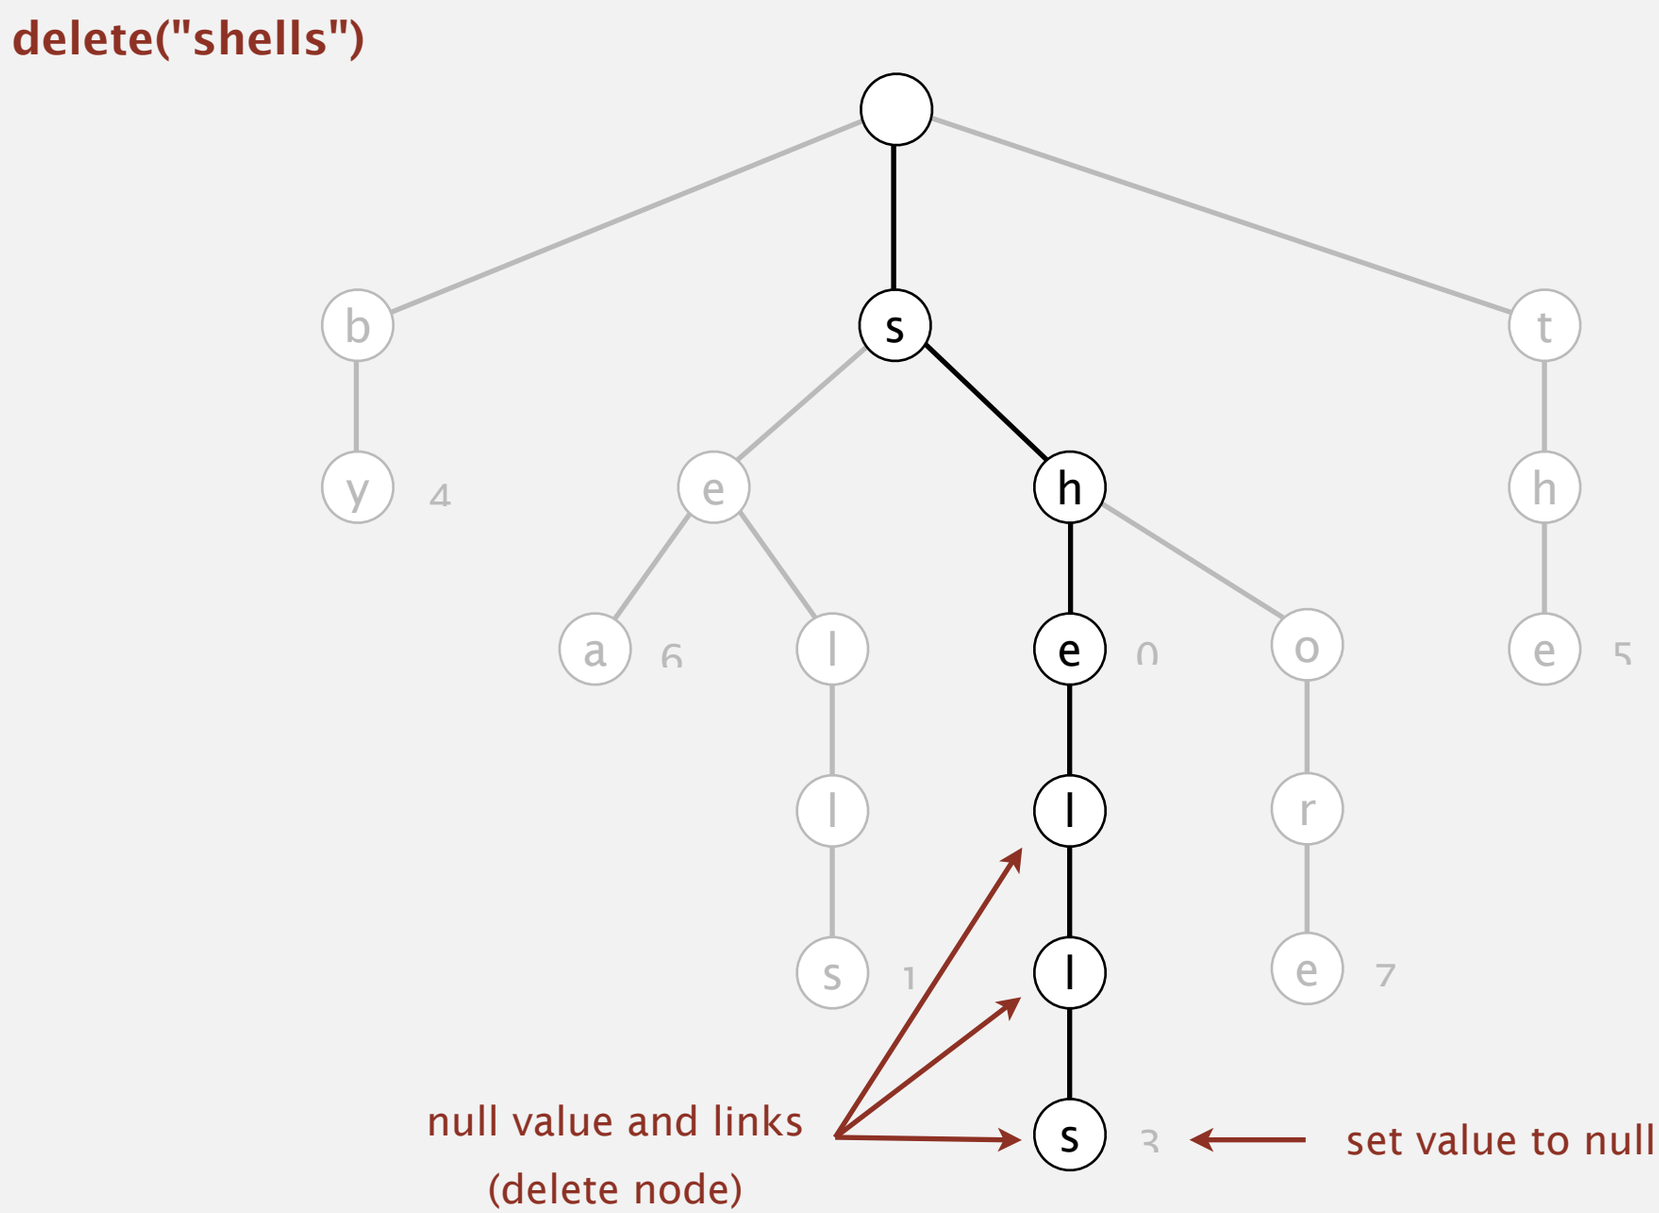

String symbol table implementations cost summary

	character accesses (typical case)				dedup	
implementation	search hit	search miss	insert	space (references)	moby.txt	actors.txt
red-black BST	$L + c \lg^2 N$	$c \lg^2 N$	$c \lg^2 N$	4N	1,4	97,4
hashing (linear probing)	L	L	L	4N to 16N	0,76	40,6
R-way trie	L	$\log_R N$	L	(R+1) N	1,12	out of memory

R-way trie.

- Method of choice for small R.
- Too much memory for large R.

Challenge. Use less memory, e.g., $65{,}536$-way trie for Unicode!

Digression: out of memory?

" 640 K ought to be enough for anybody. "
— (mis)attributed to Bill Gates, 1981
(commenting on the amount of RAM in personal computers)

" 64 MB of RAM may limit performance of some Windows XP features; therefore, 128 MB or higher is recommended for best performance. " *— Windows XP manual, 2002*

" 64 bit is coming to desktops, there is no doubt about that. But apart from Photoshop, I can't think of desktop applications where you would need more than 4GB of physical memory, which is what you have to have in order to benefit from this technology. Right now, it is costly. " *— Bill Gates, 2003*

Digression: out of memory?

A short (approximate) history.

machine	year	address bits	addressable memory	typical actual memory	cost
PDP-8	1960s	12	6 KB	6 KB	$16K
PDP-10	1970s	18	256 KB	256 KB	$1M
IBM S/360	1970s	24	4 MB	512 KB	$1M
VAX	1980s	32	4 GB	1 MB	$1M
Pentium	1990s	32	4 GB	1 GB	$1K
Xeon	2000s	64	enough	4 GB	100 $
??	future	128+	enough	enough	1 $

" 512-bit words ought to be enough for anybody. "

— Kevin Wayne, 1995

Tries

- R-way tries
- Ternary search tries
- Character-based operations

Ternary search tries

- Store characters and values in nodes (not keys).
- Each node has three children: smaller (left), equal (middle), larger (right).

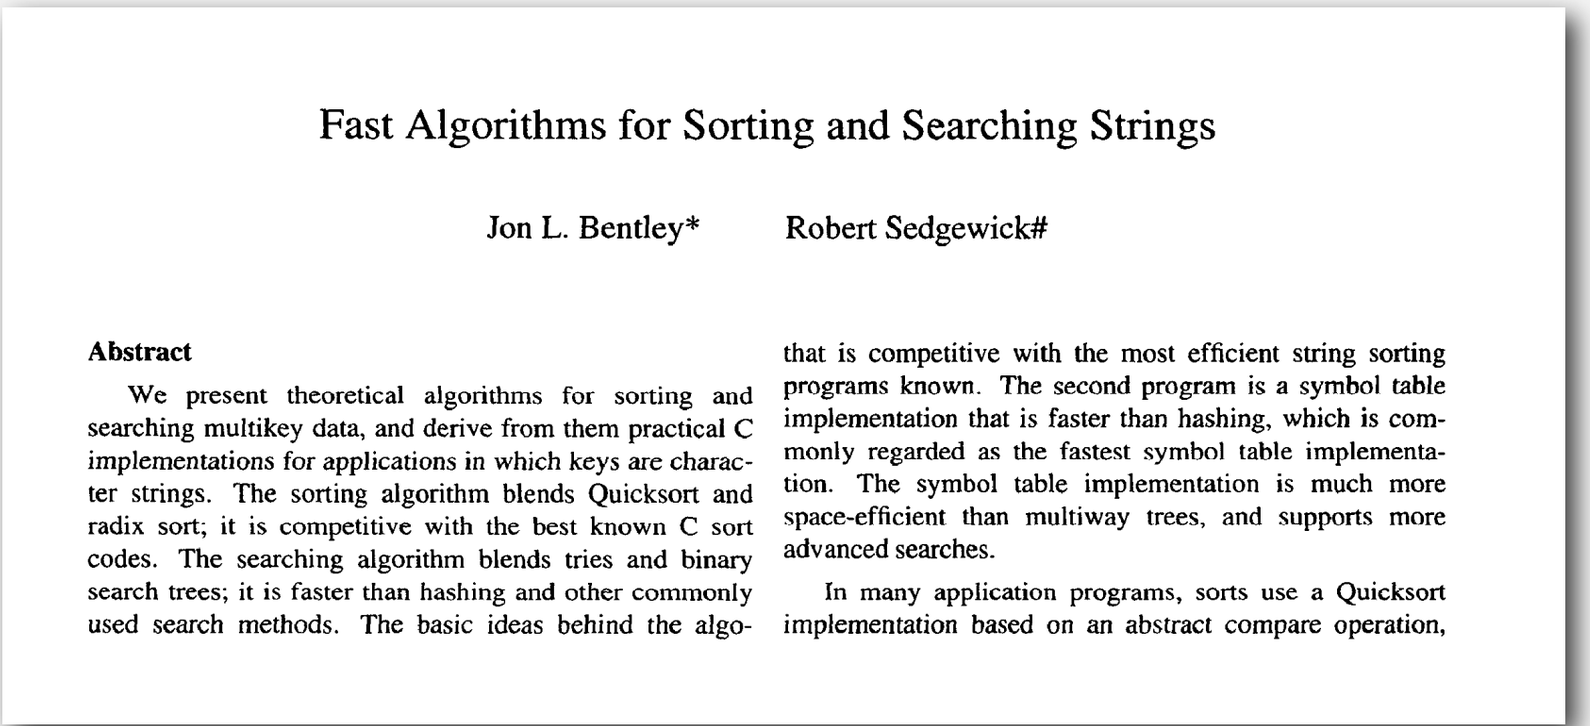

Fast Algorithms for Sorting and Searching Strings

Jon L. Bentley* Robert Sedgewick#

Abstract

We present theoretical algorithms for sorting and searching multikey data, and derive from them practical C implementations for applications in which keys are character strings. The sorting algorithm blends Quicksort and radix sort; it is competitive with the best known C sort codes. The searching algorithm blends tries and binary search trees; it is faster than hashing and other commonly used search methods. The basic ideas behind the algo- that is competitive with the most efficient string sorting programs known. The second program is a symbol table implementation that is faster than hashing, which is commonly regarded as the fastest symbol table implementation. The symbol table implementation is much more space-efficient than multiway trees, and supports more advanced searches.

In many application programs, sorts use a Quicksort implementation based on an abstract compare operation,

Ternary search tries

- Store characters and values in nodes (not keys).
- Each node has three children: smaller (left), equal (middle), larger (right).

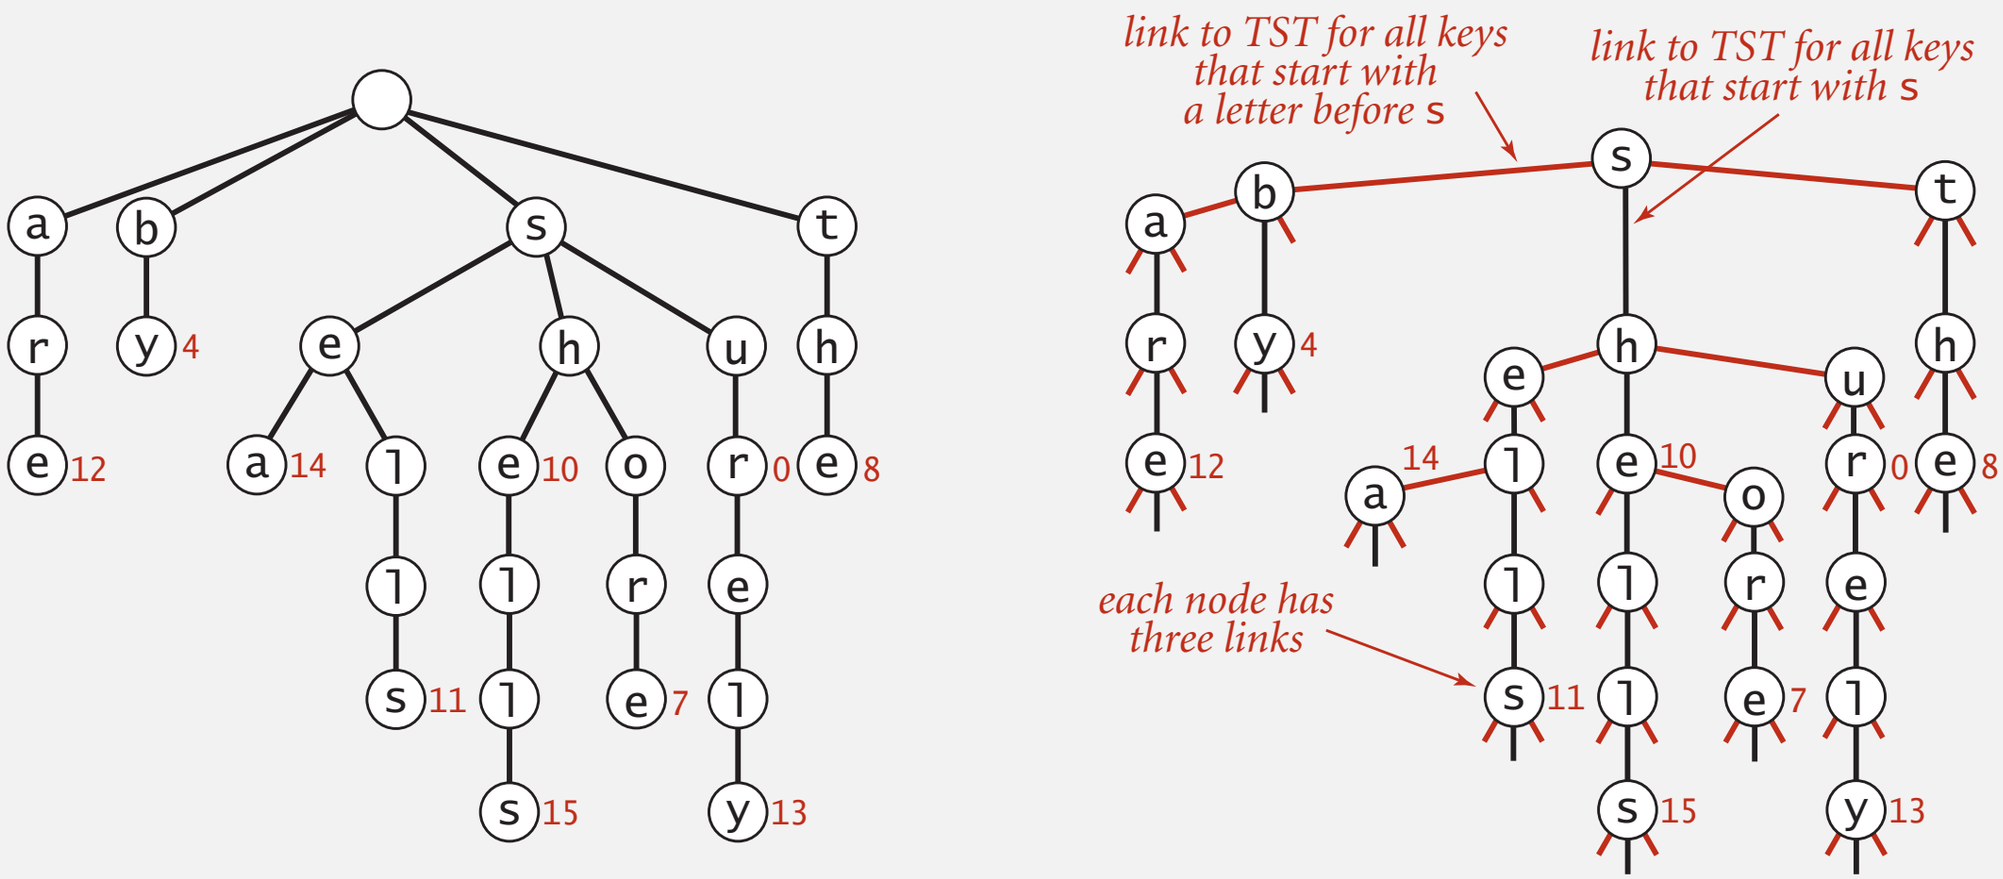

TST representation of a trie

Search in a TST

Follow links corresponding to each character in the key.

- If less, take left link; if greater, take right link.
- If equal, take the middle link and move to the next key character.

Search hit. Node where search ends has a non-null value.

Search miss. Reach a null link or node where search ends has null value.

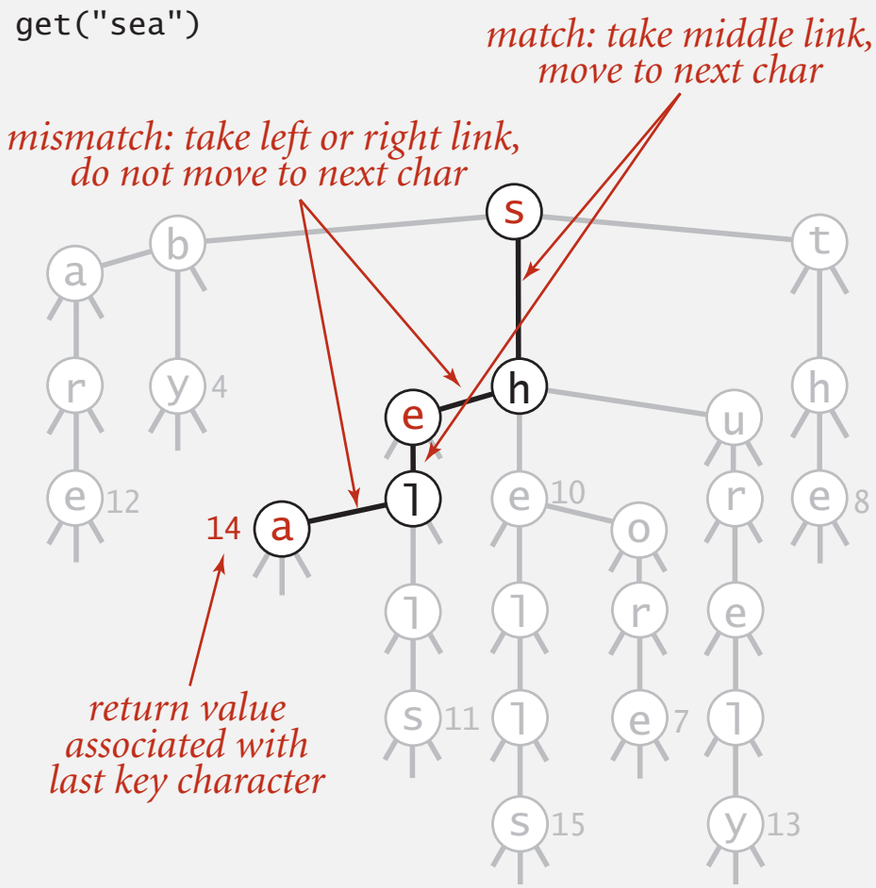

Search in a TST

get("sea")

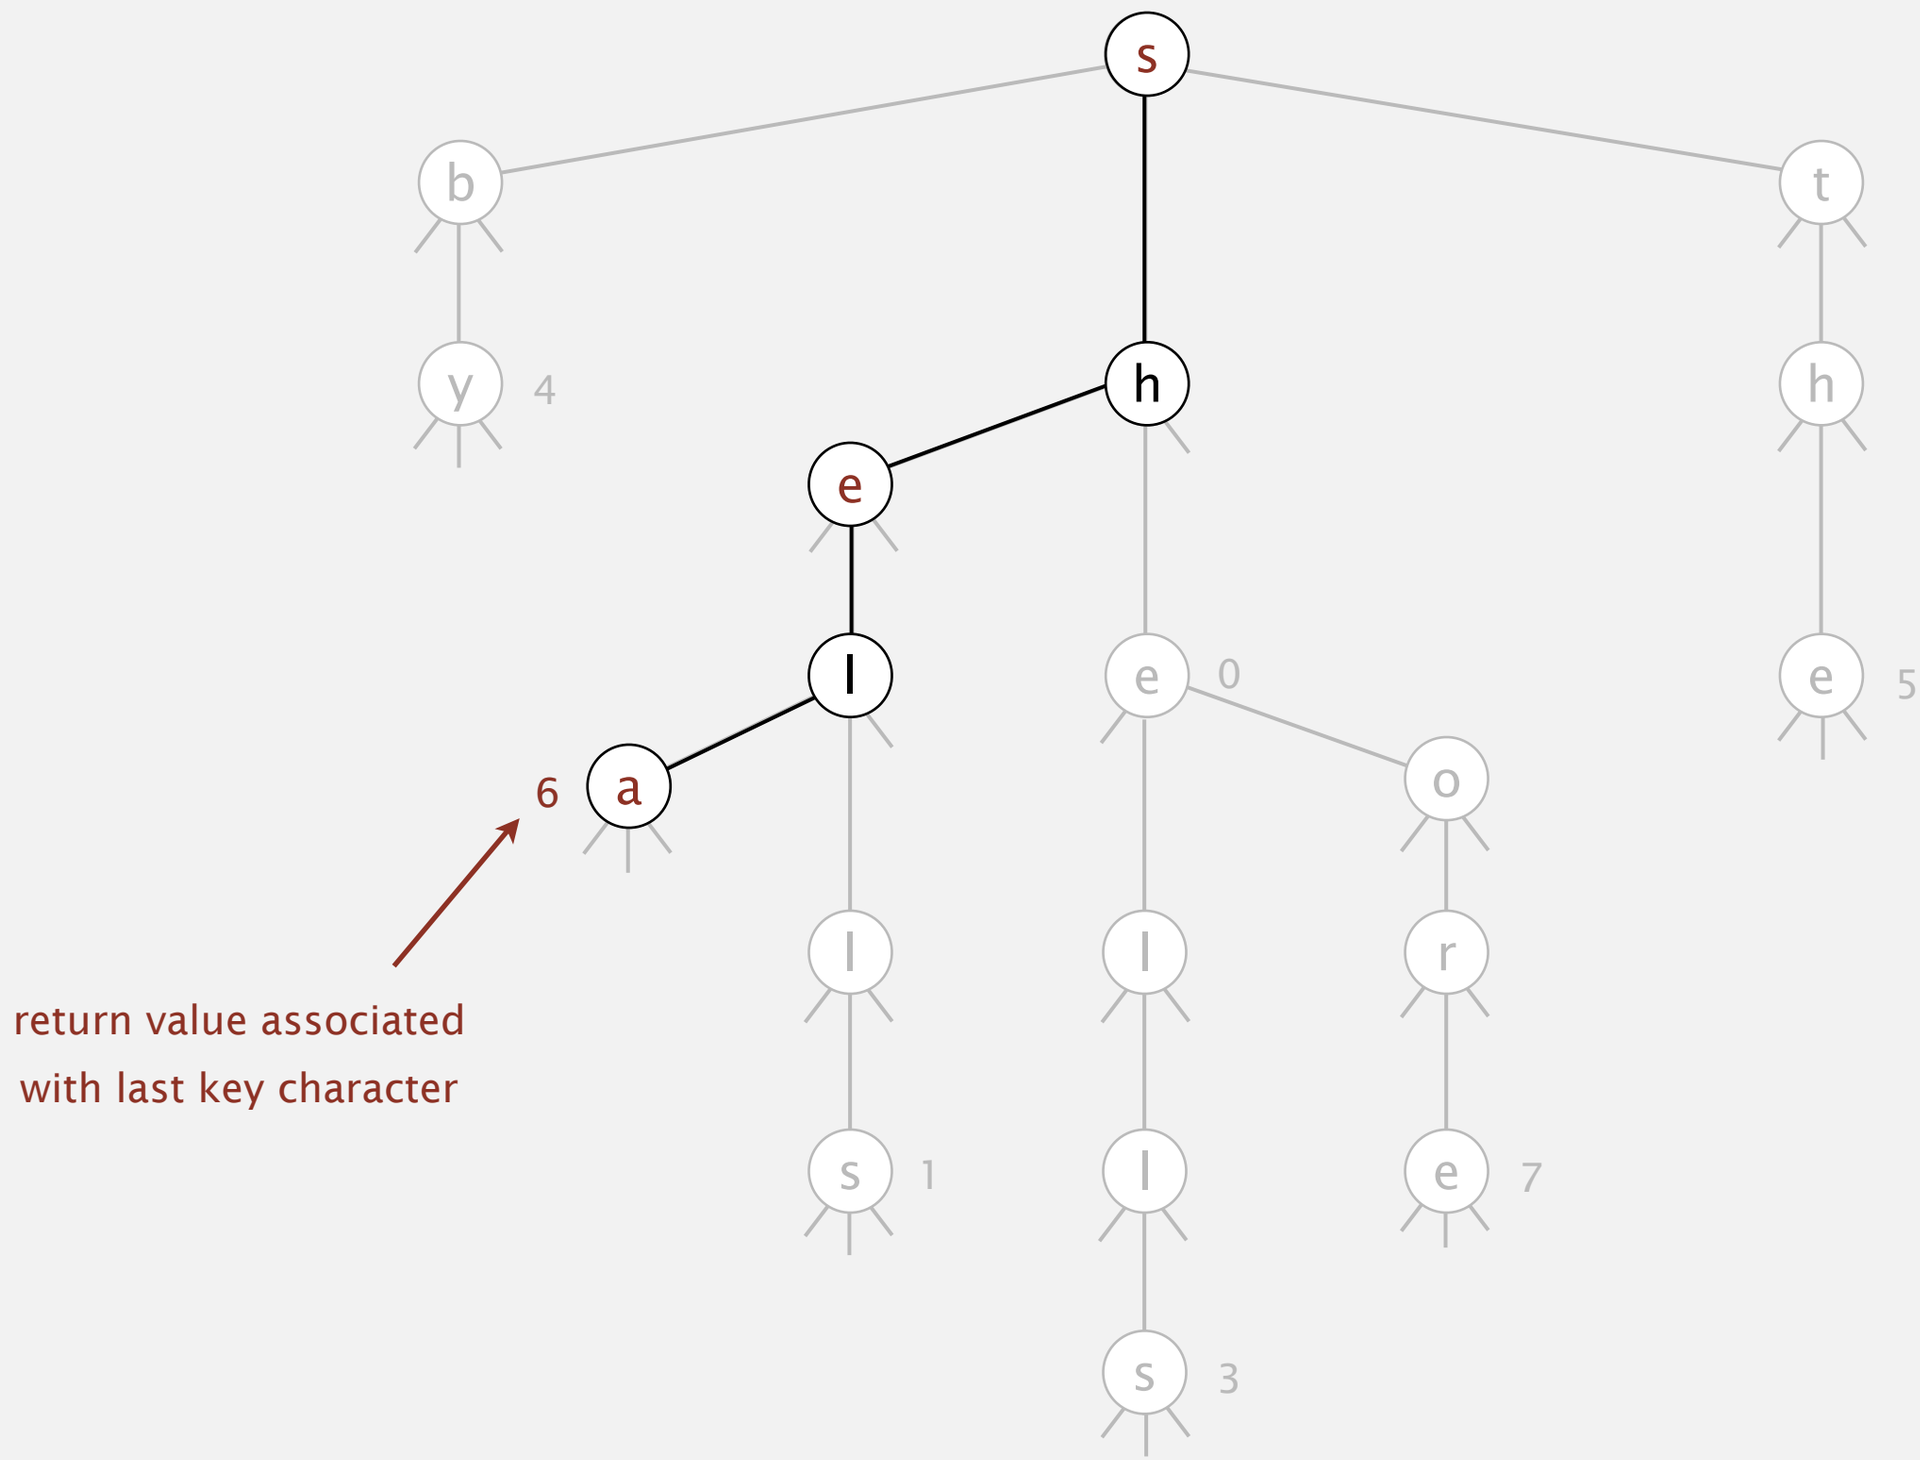

Search in a TST

get("shelter")

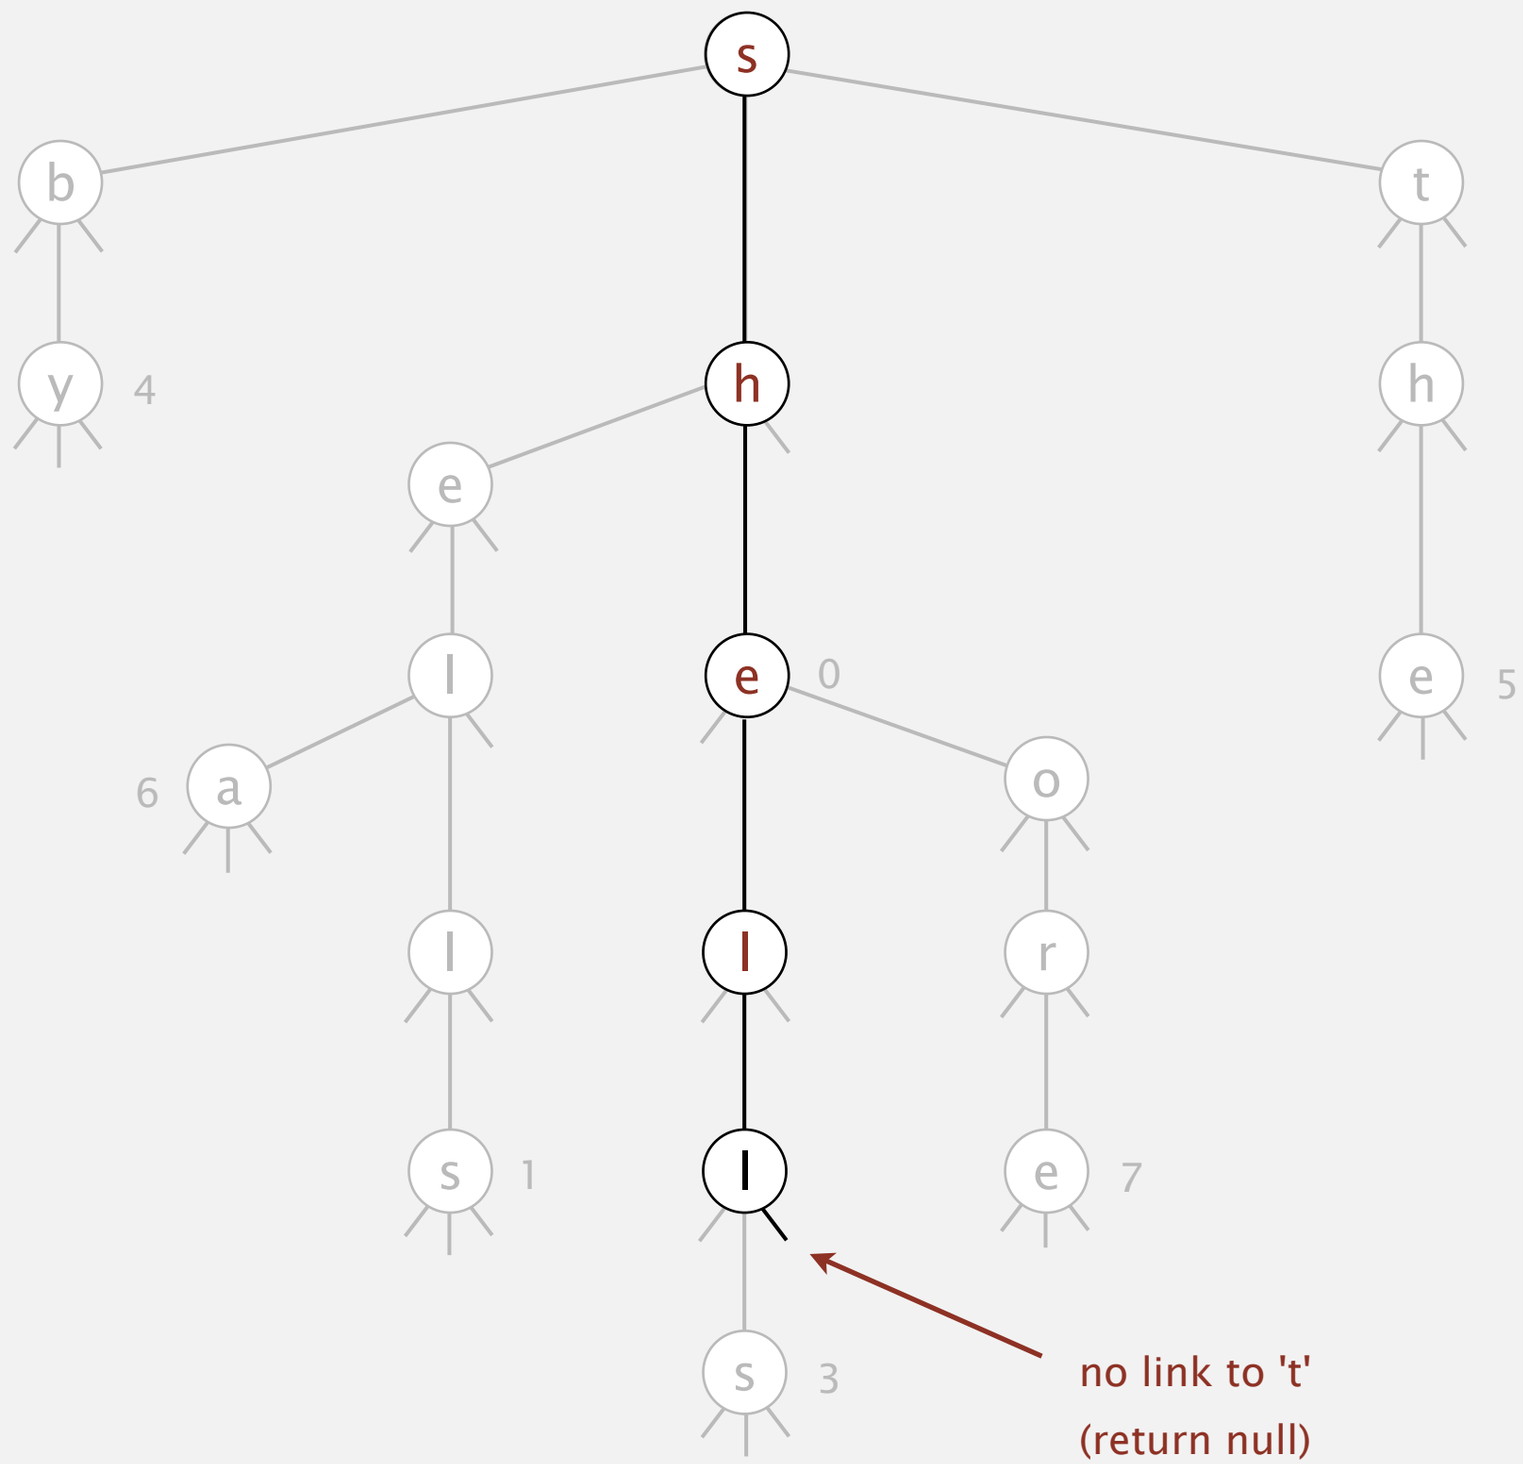

Ternary search trie insertion demo

ternary search trie

Ternary search trie insertion demo

put("she", 0)

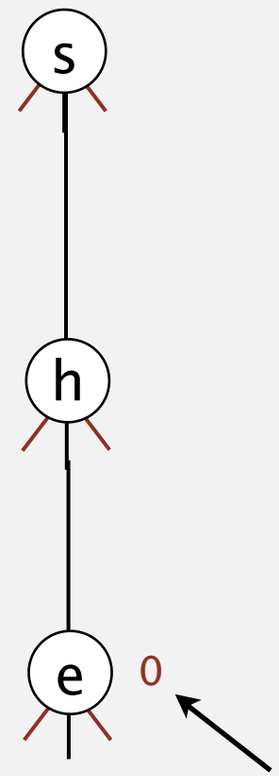

key is sequence of characters from root to value using middle links

value is in node corresponding to last character

Ternary search trie insertion demo

put("she", 0)

Ternary search trie insertion demo

put("sells", 1)

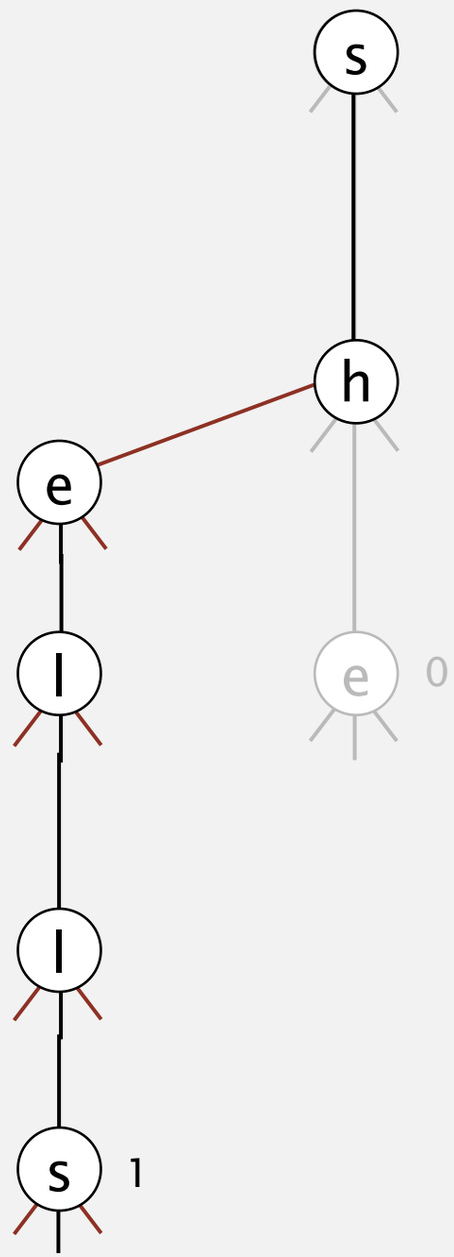

Ternary search trie insertion demo

ternary search trie

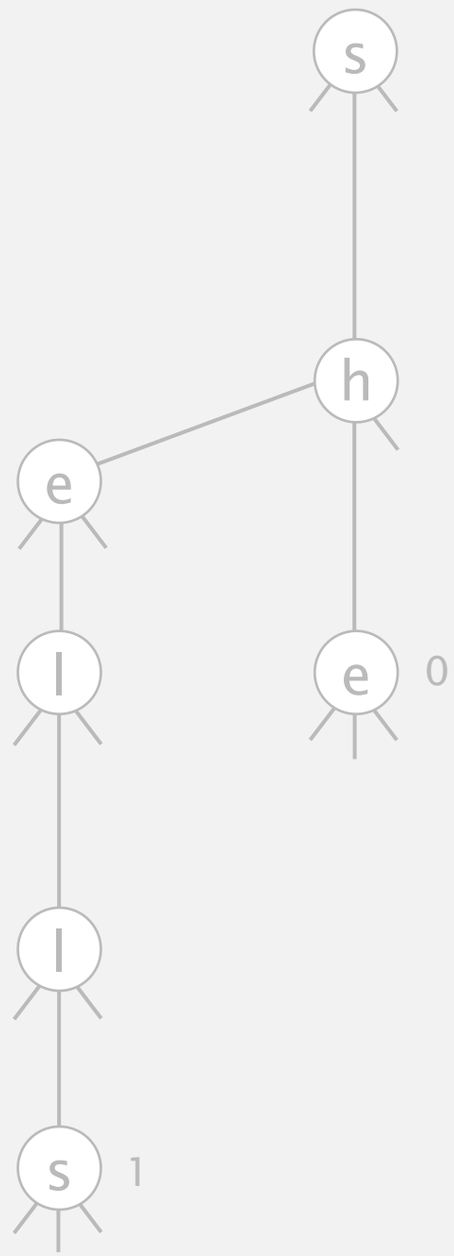

Ternary search trie insertion demo

put("sea", 2)

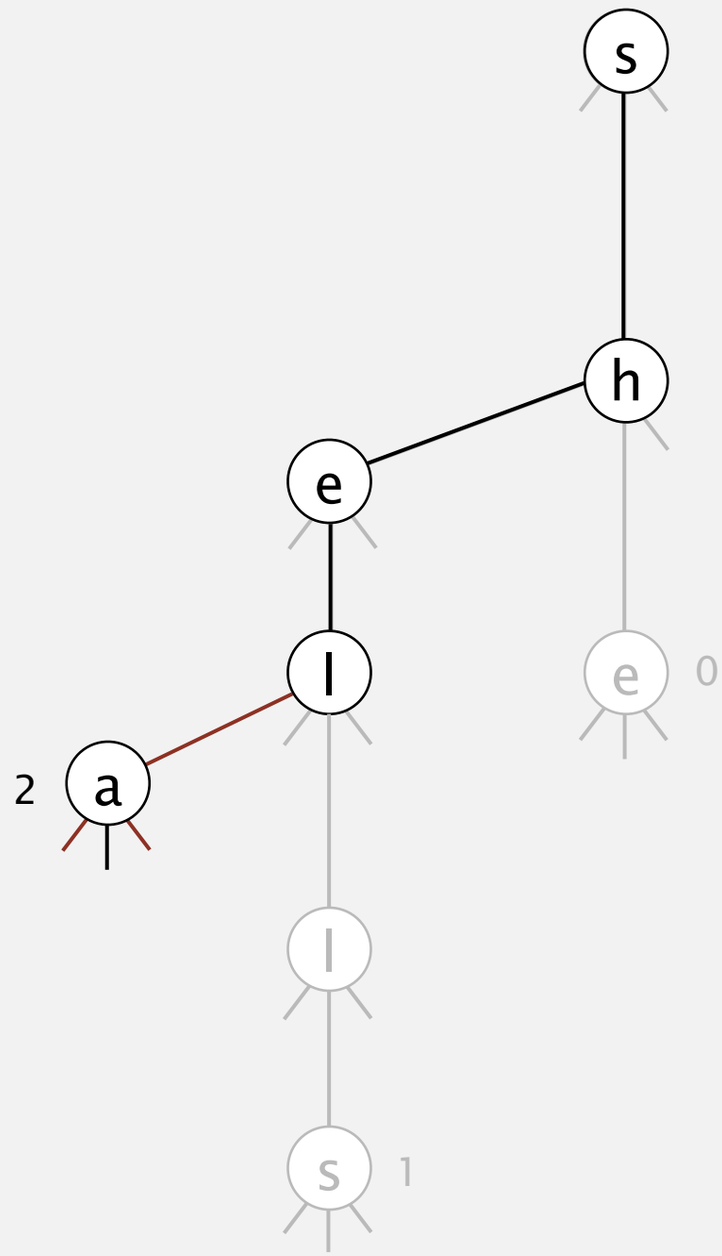

Ternary search trie insertion demo

ternary search trie

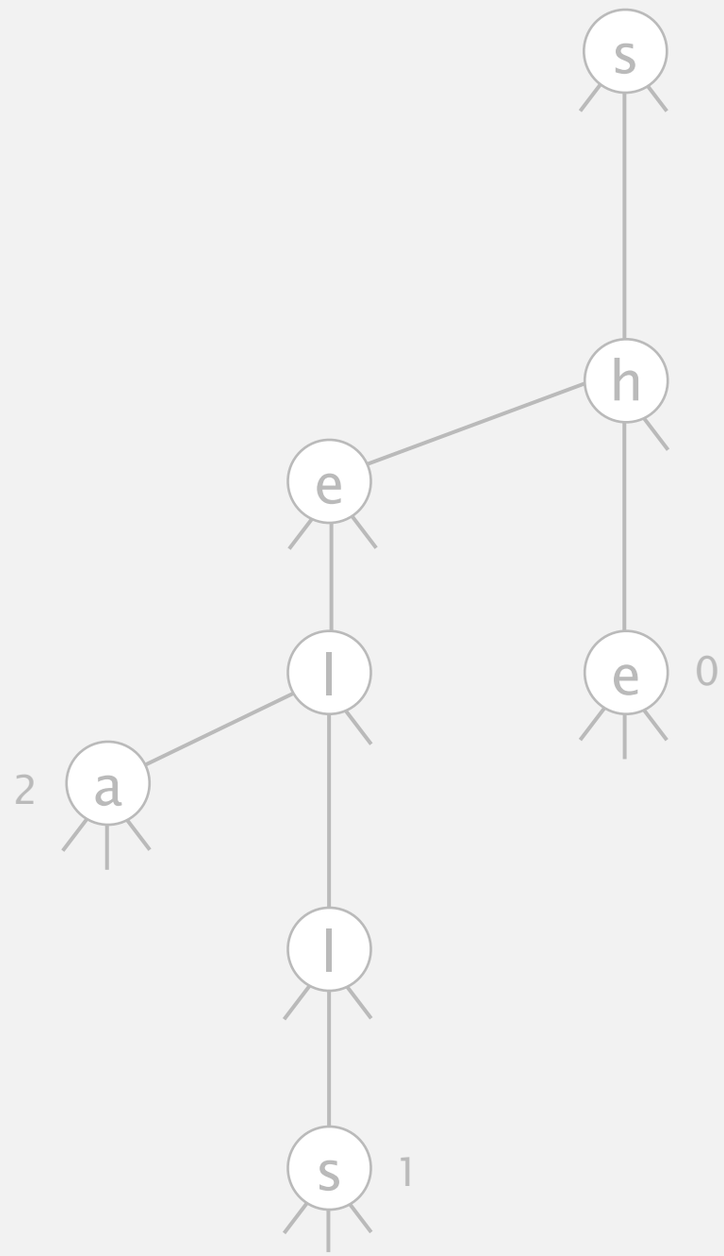

Ternary search trie insertion demo

put("shells", 3)

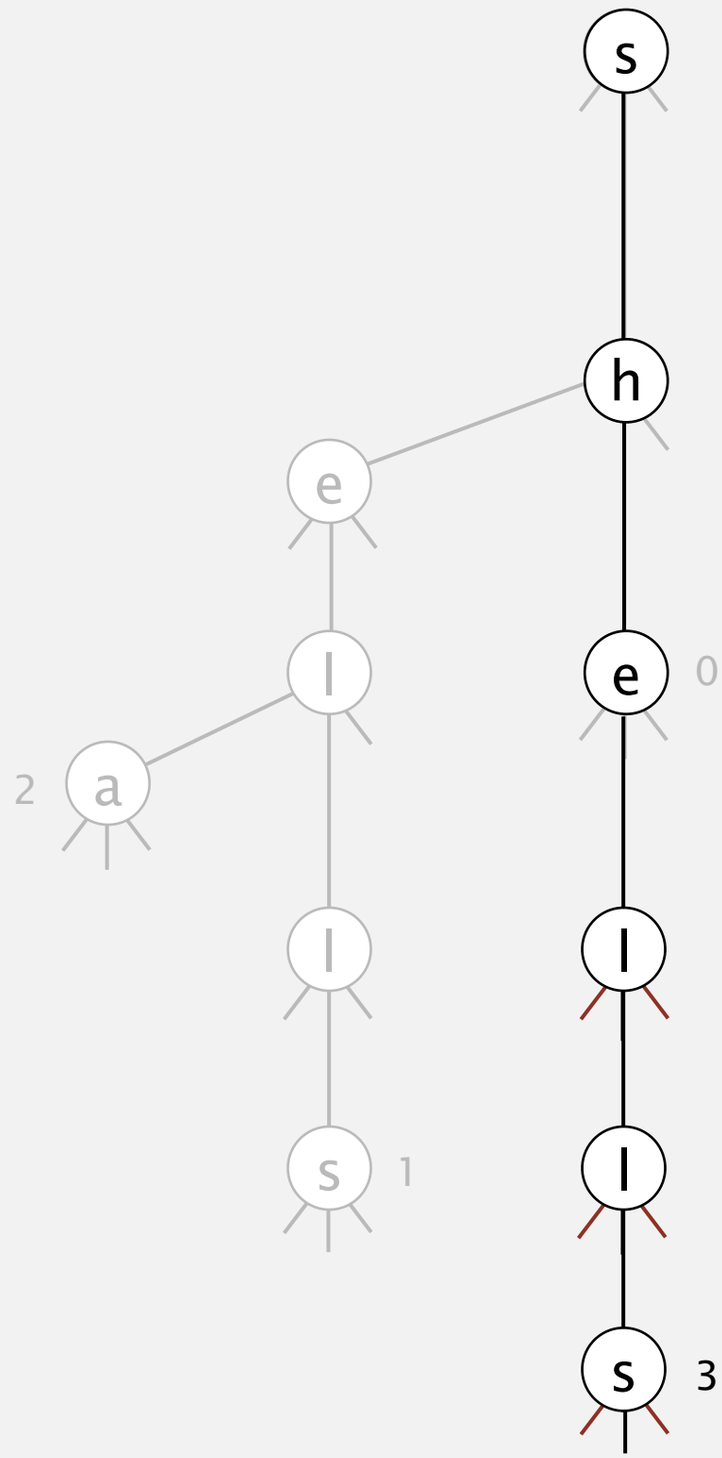

Ternary search trie insertion demo

ternary search trie

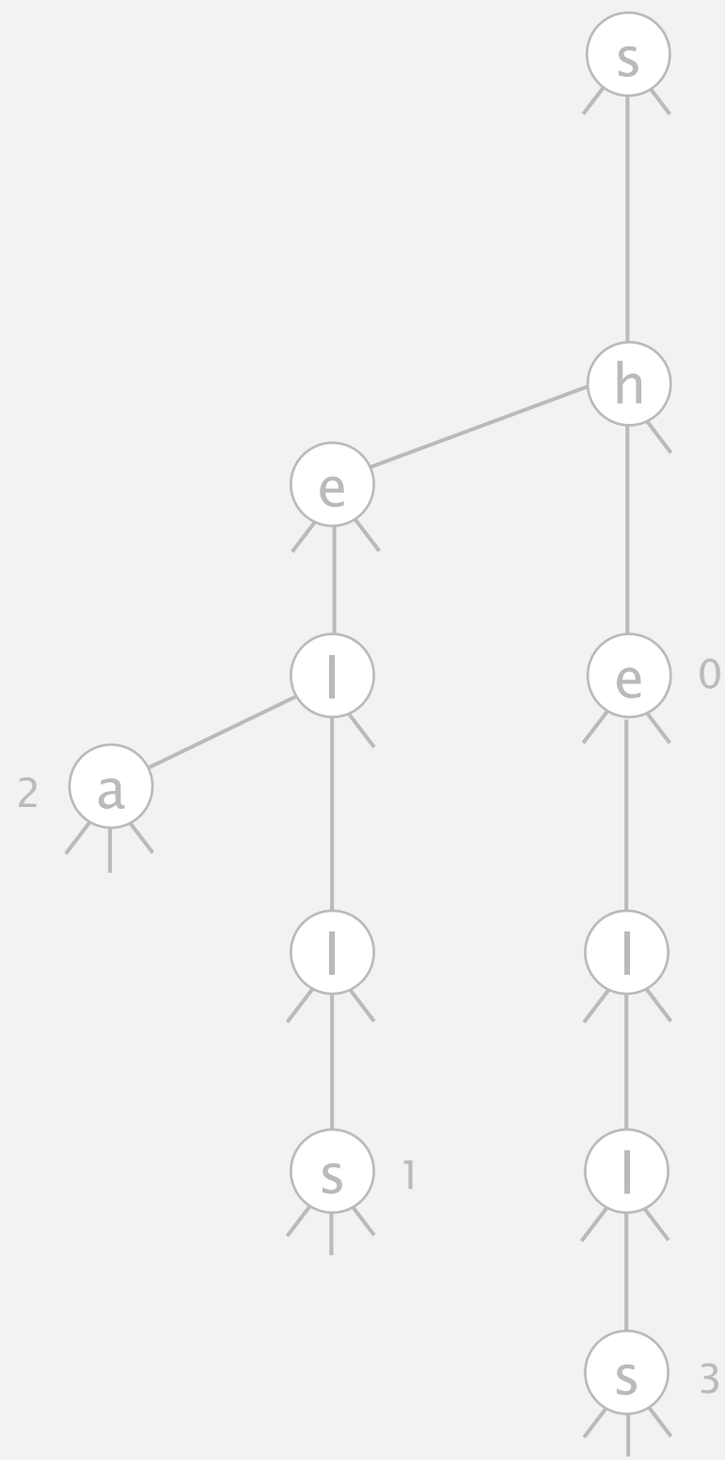

Ternary search trie insertion demo

put("by", 4)

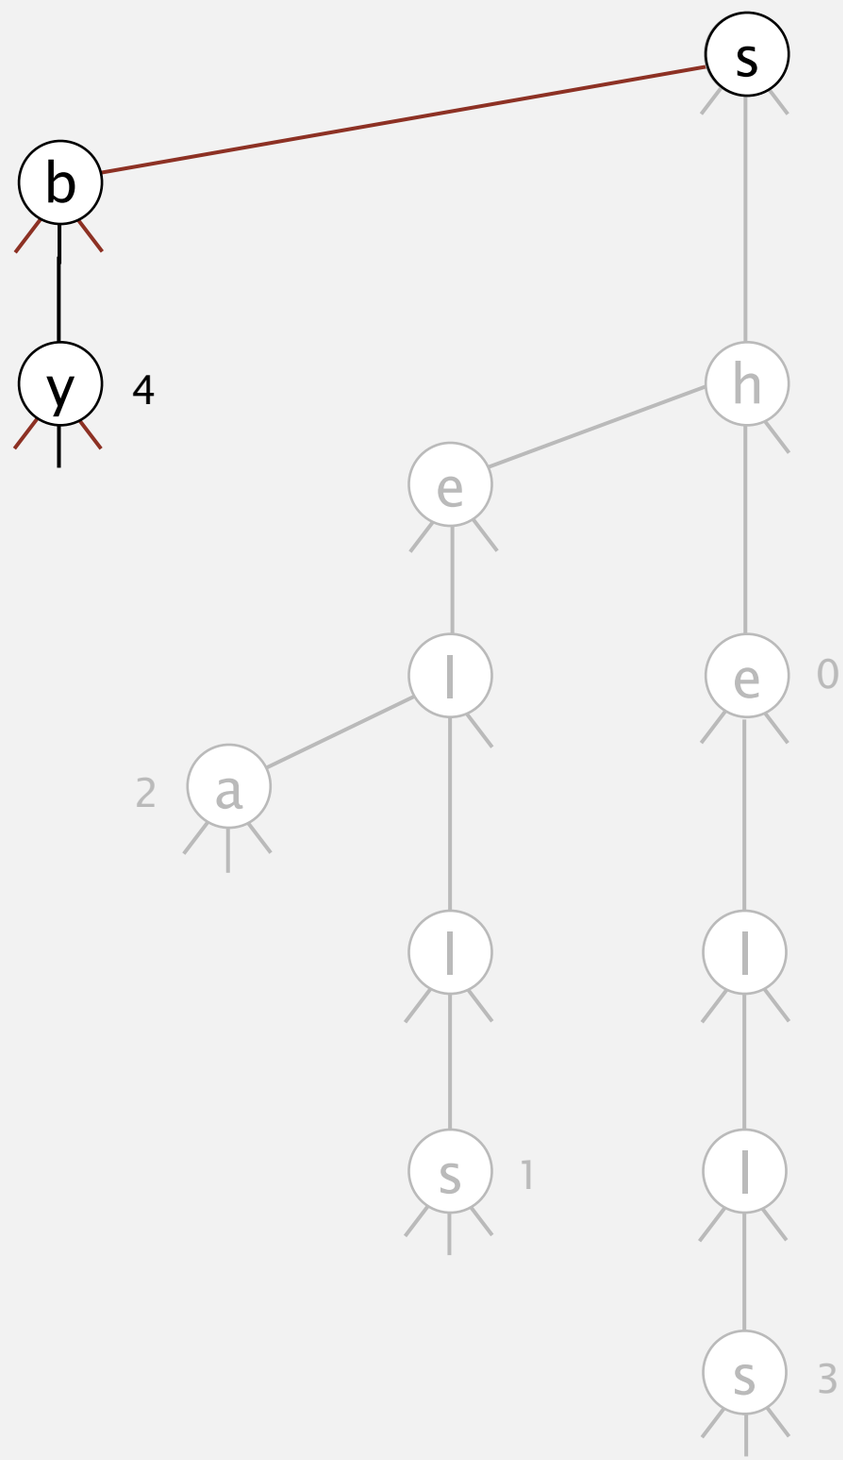

Ternary search trie insertion demo

ternary search trie

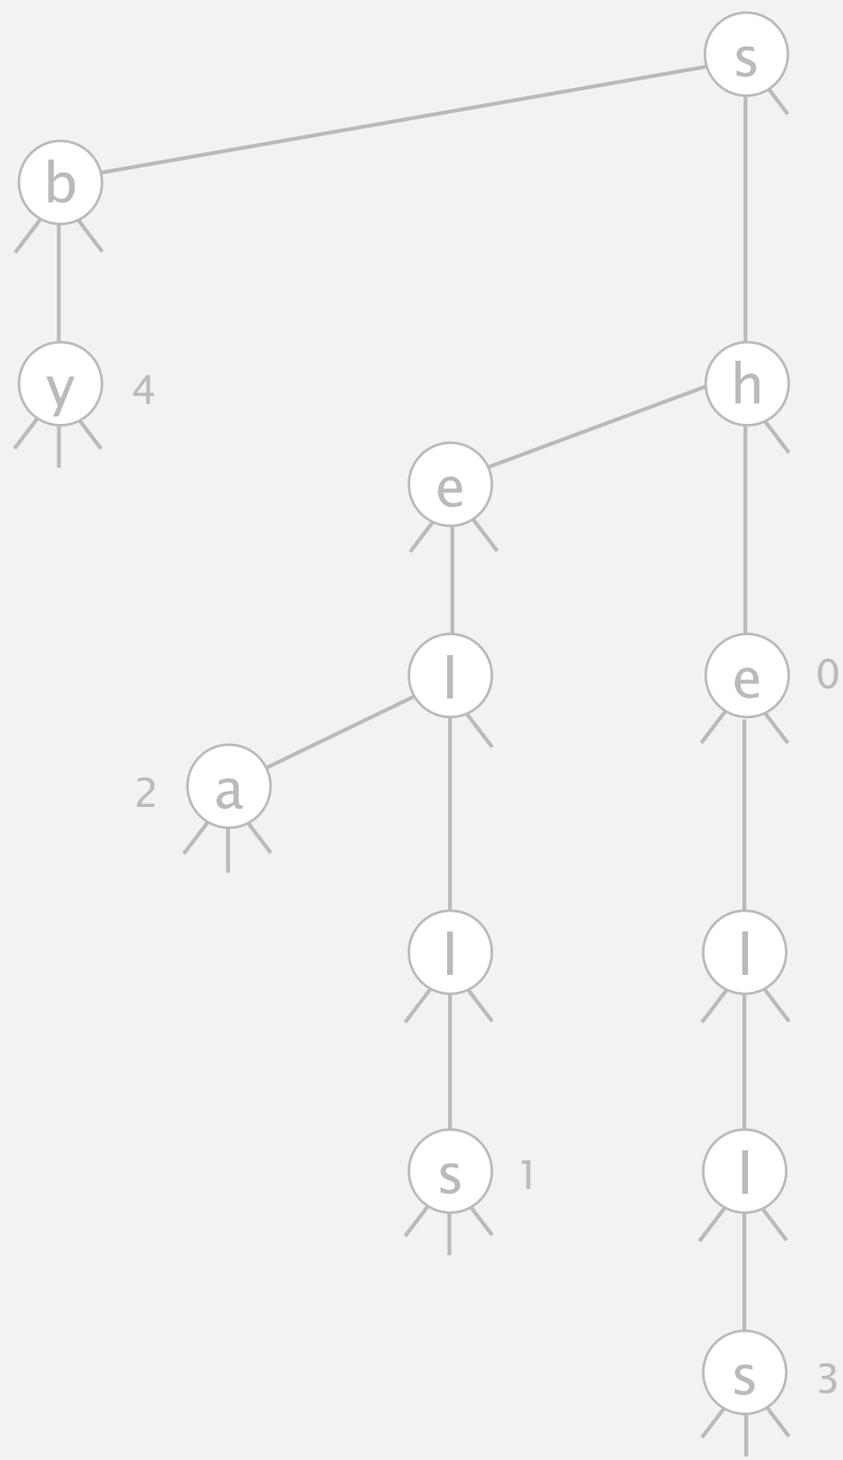

Ternary search trie insertion demo

put("the", 5)

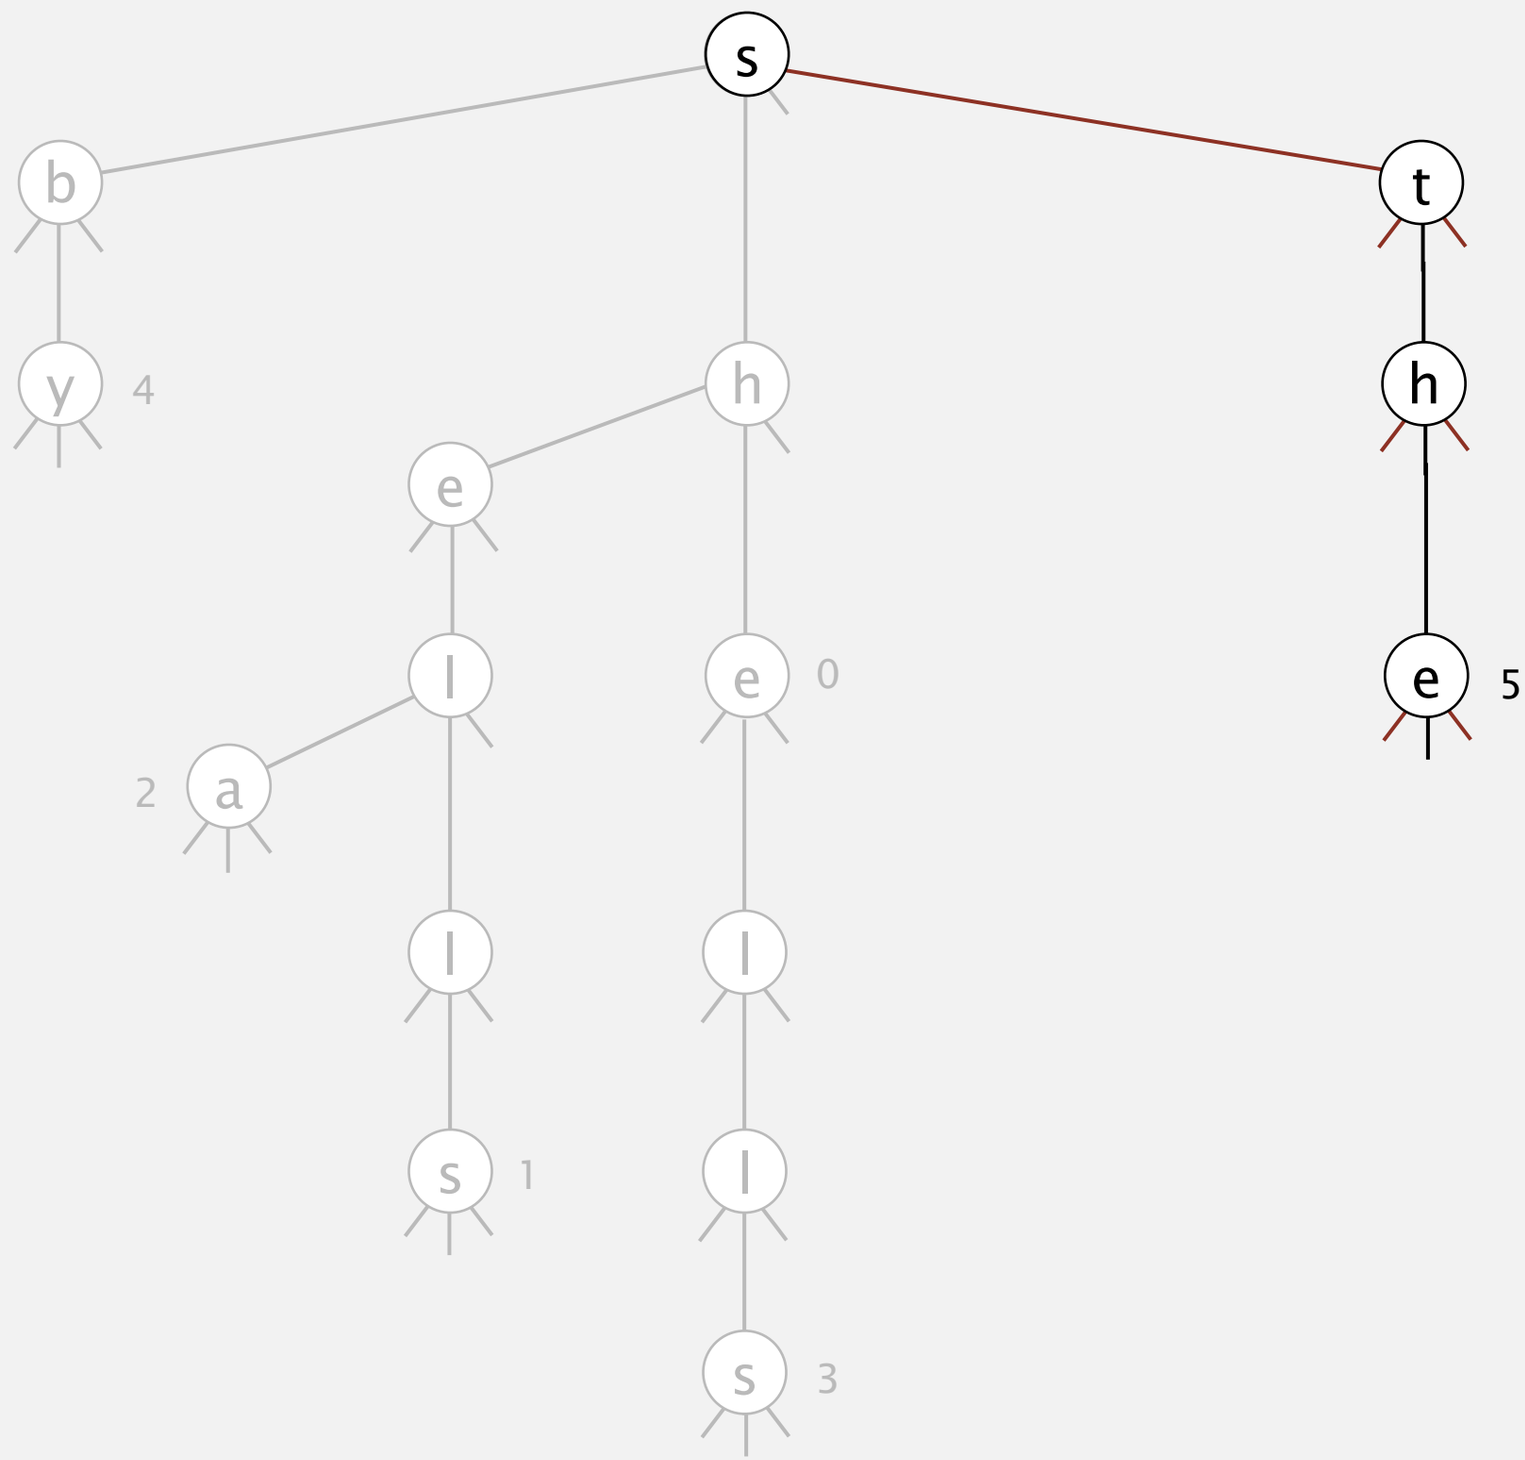

Ternary search trie insertion demo

ternary search trie

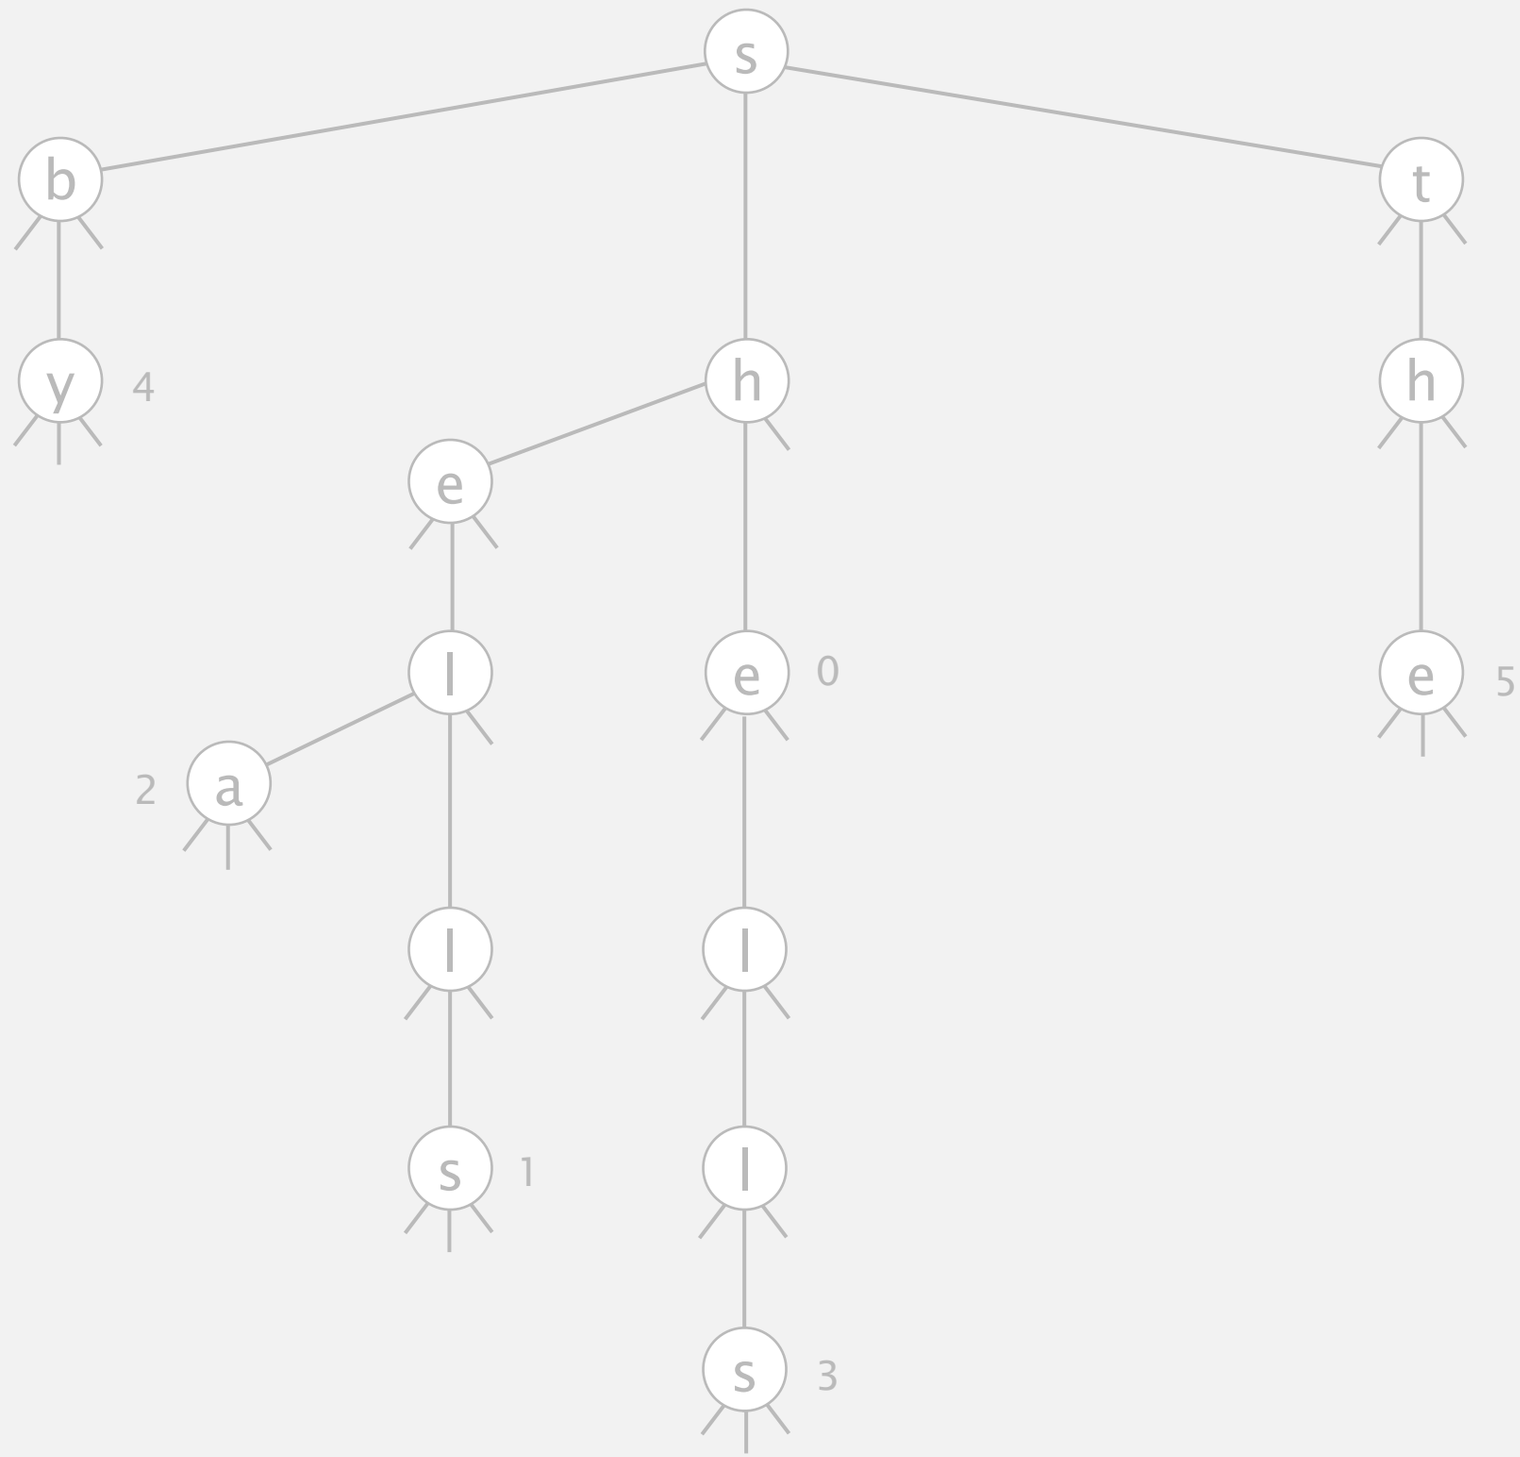

Ternary search trie insertion demo

put("sea", 6)

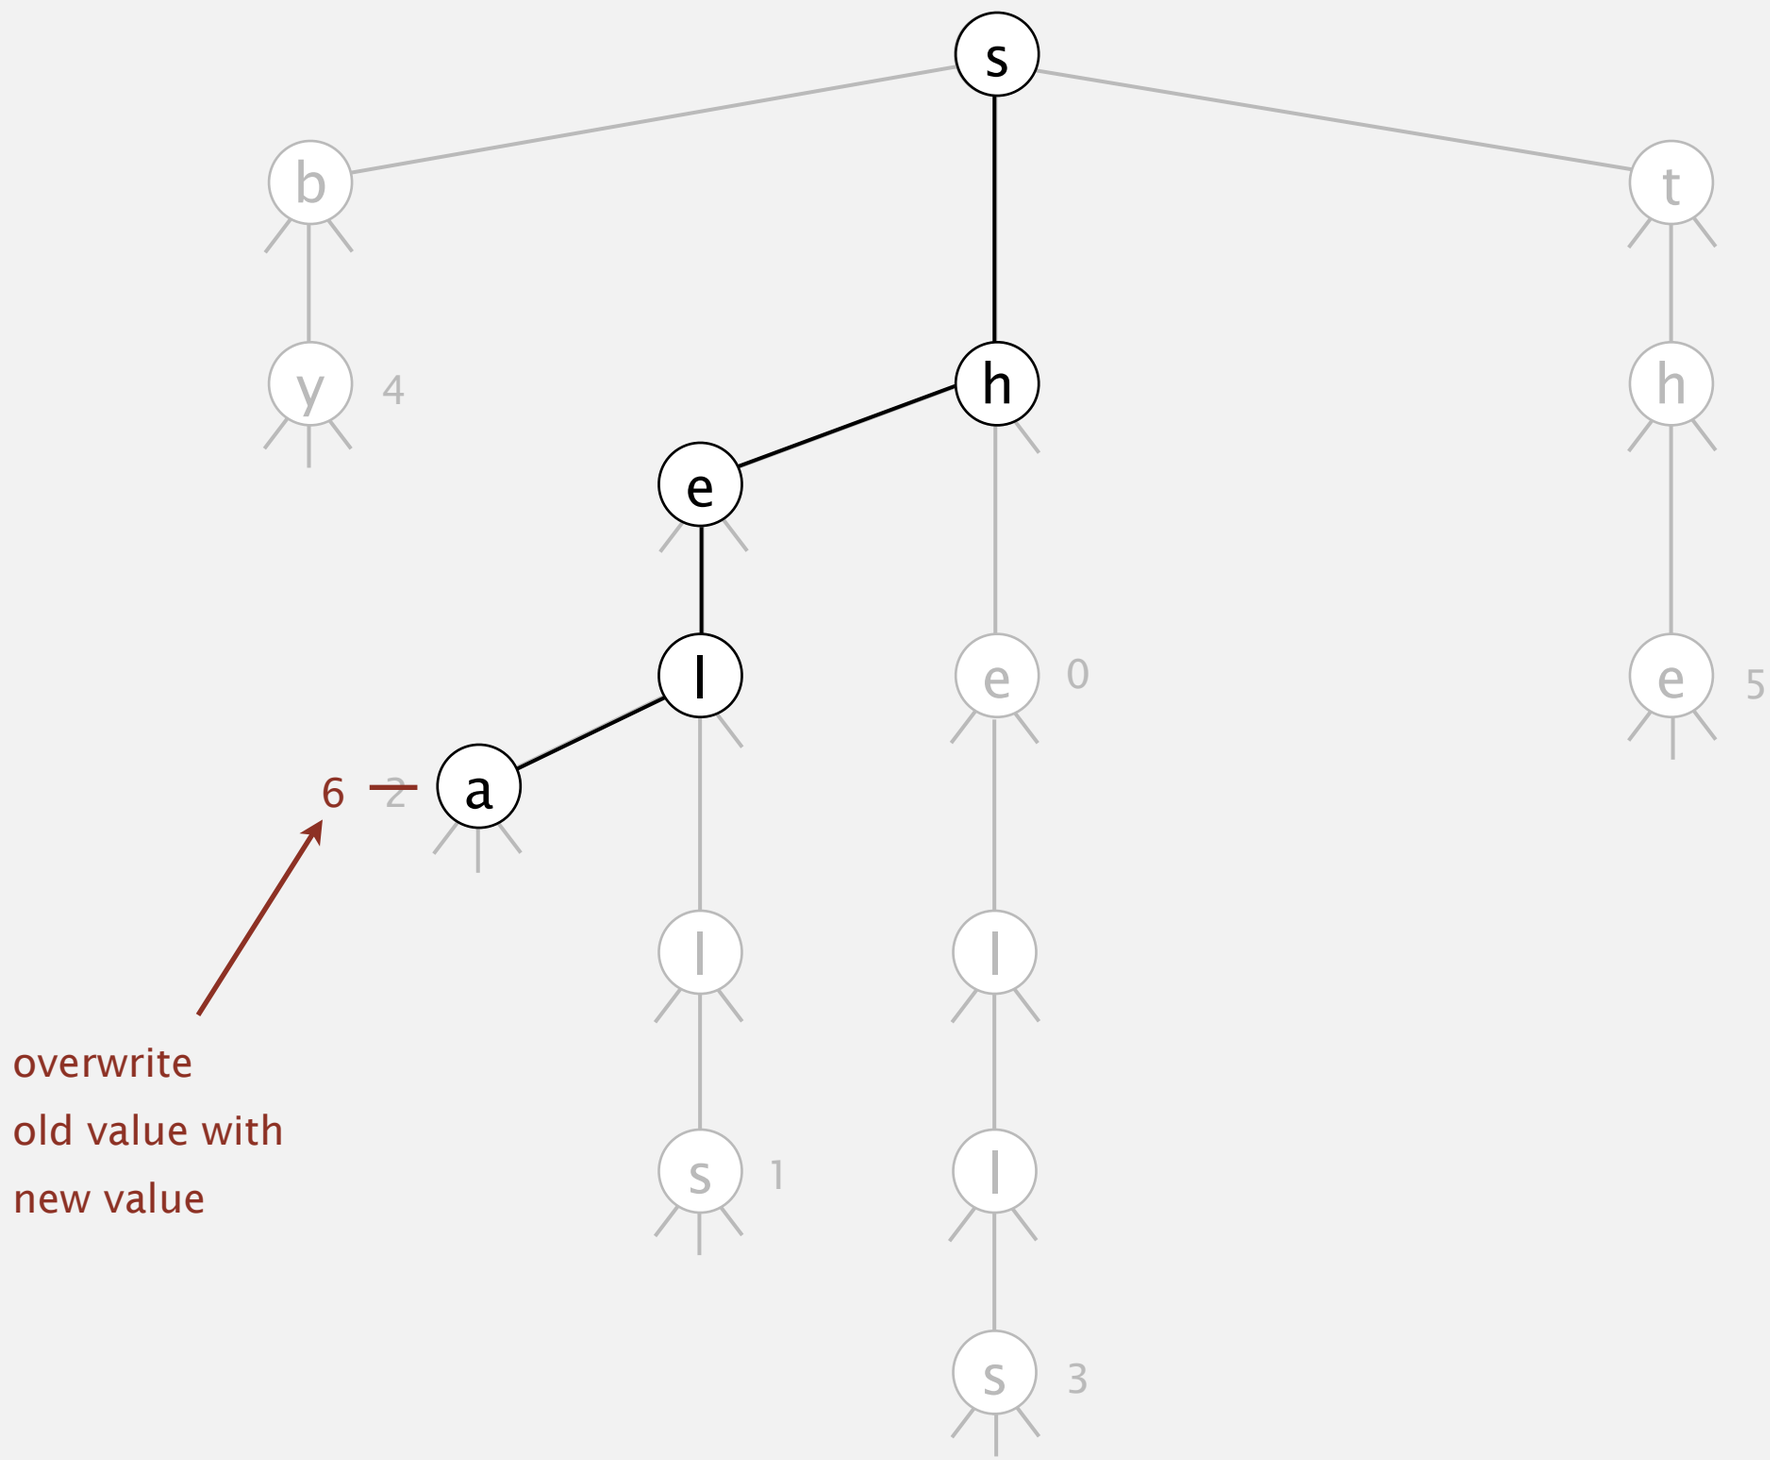

Ternary search trie insertion demo

ternary search trie

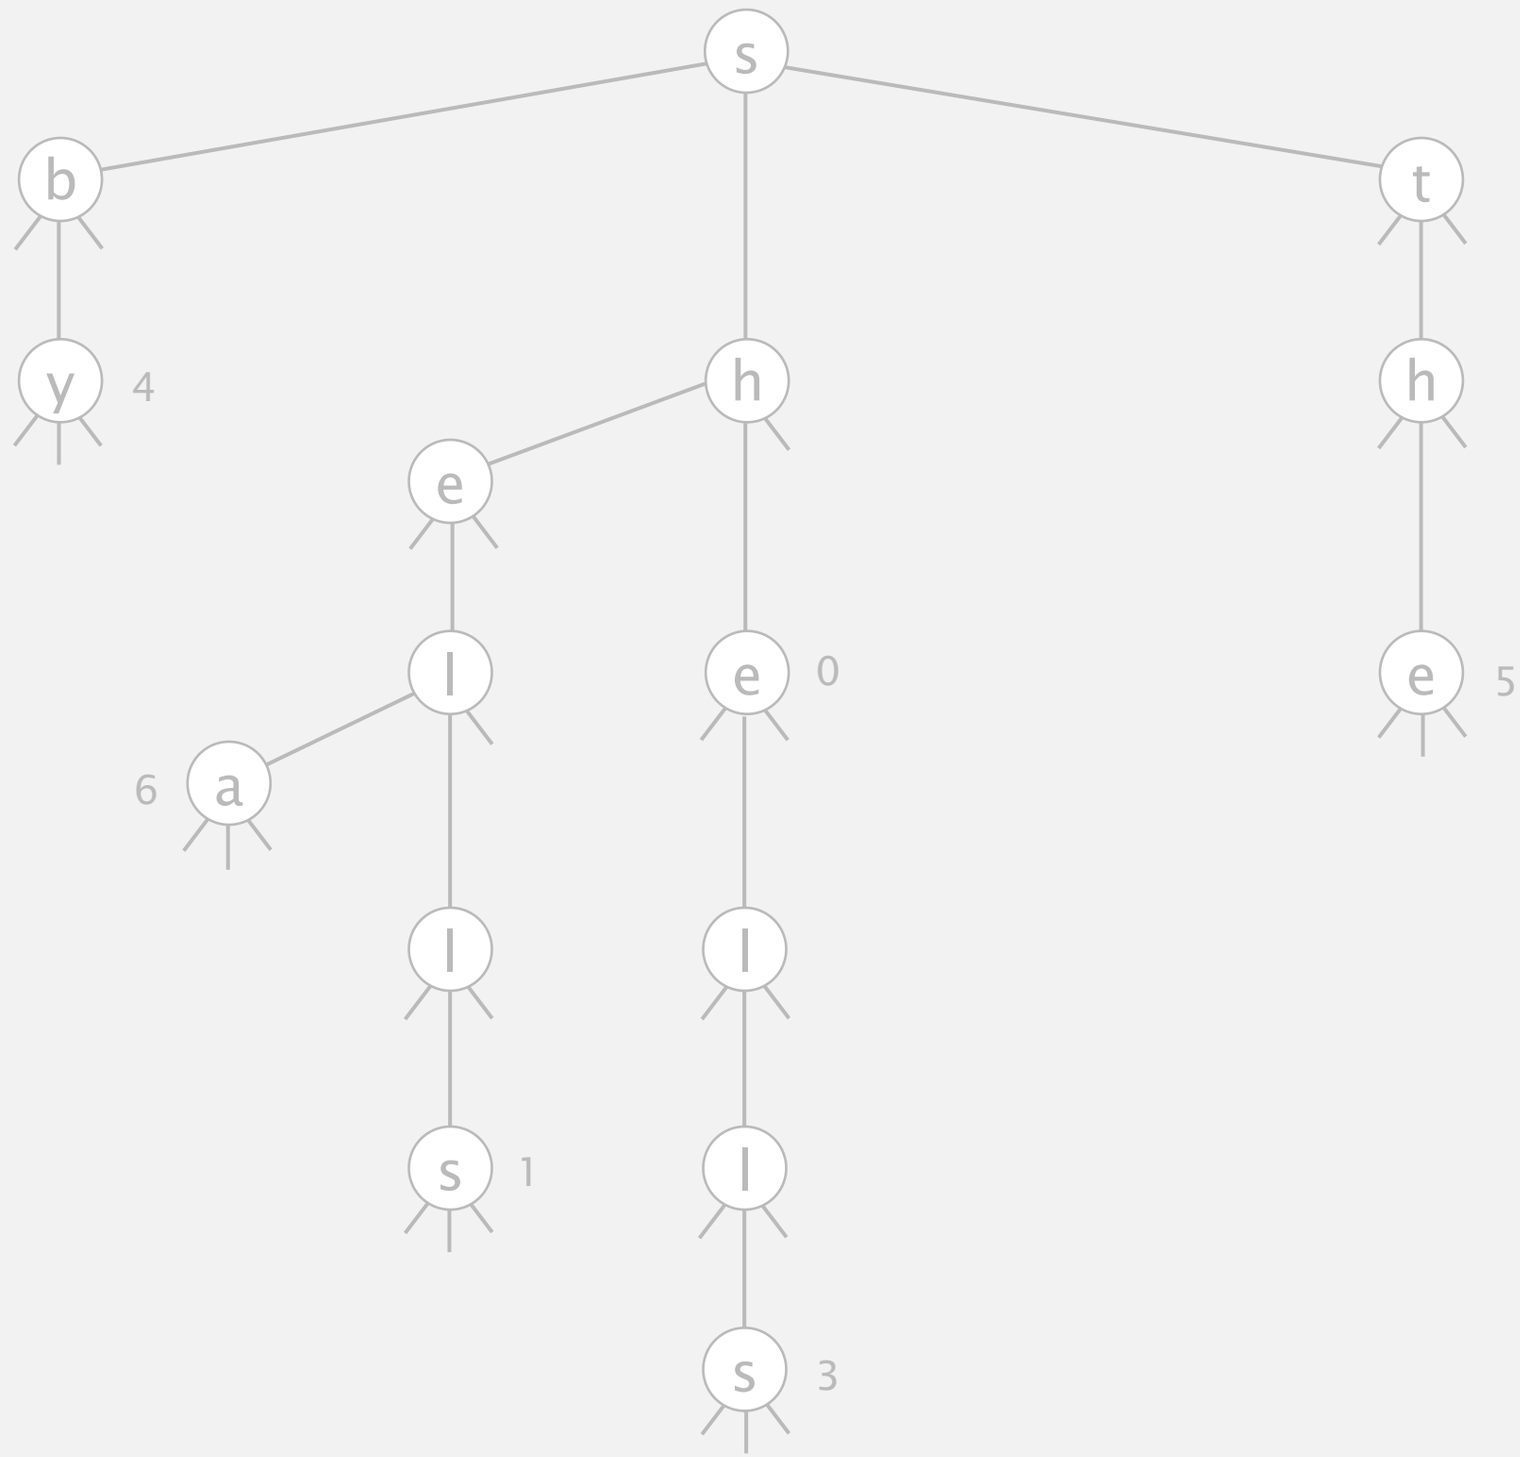

Ternary search trie insertion demo

put("shore", 7)

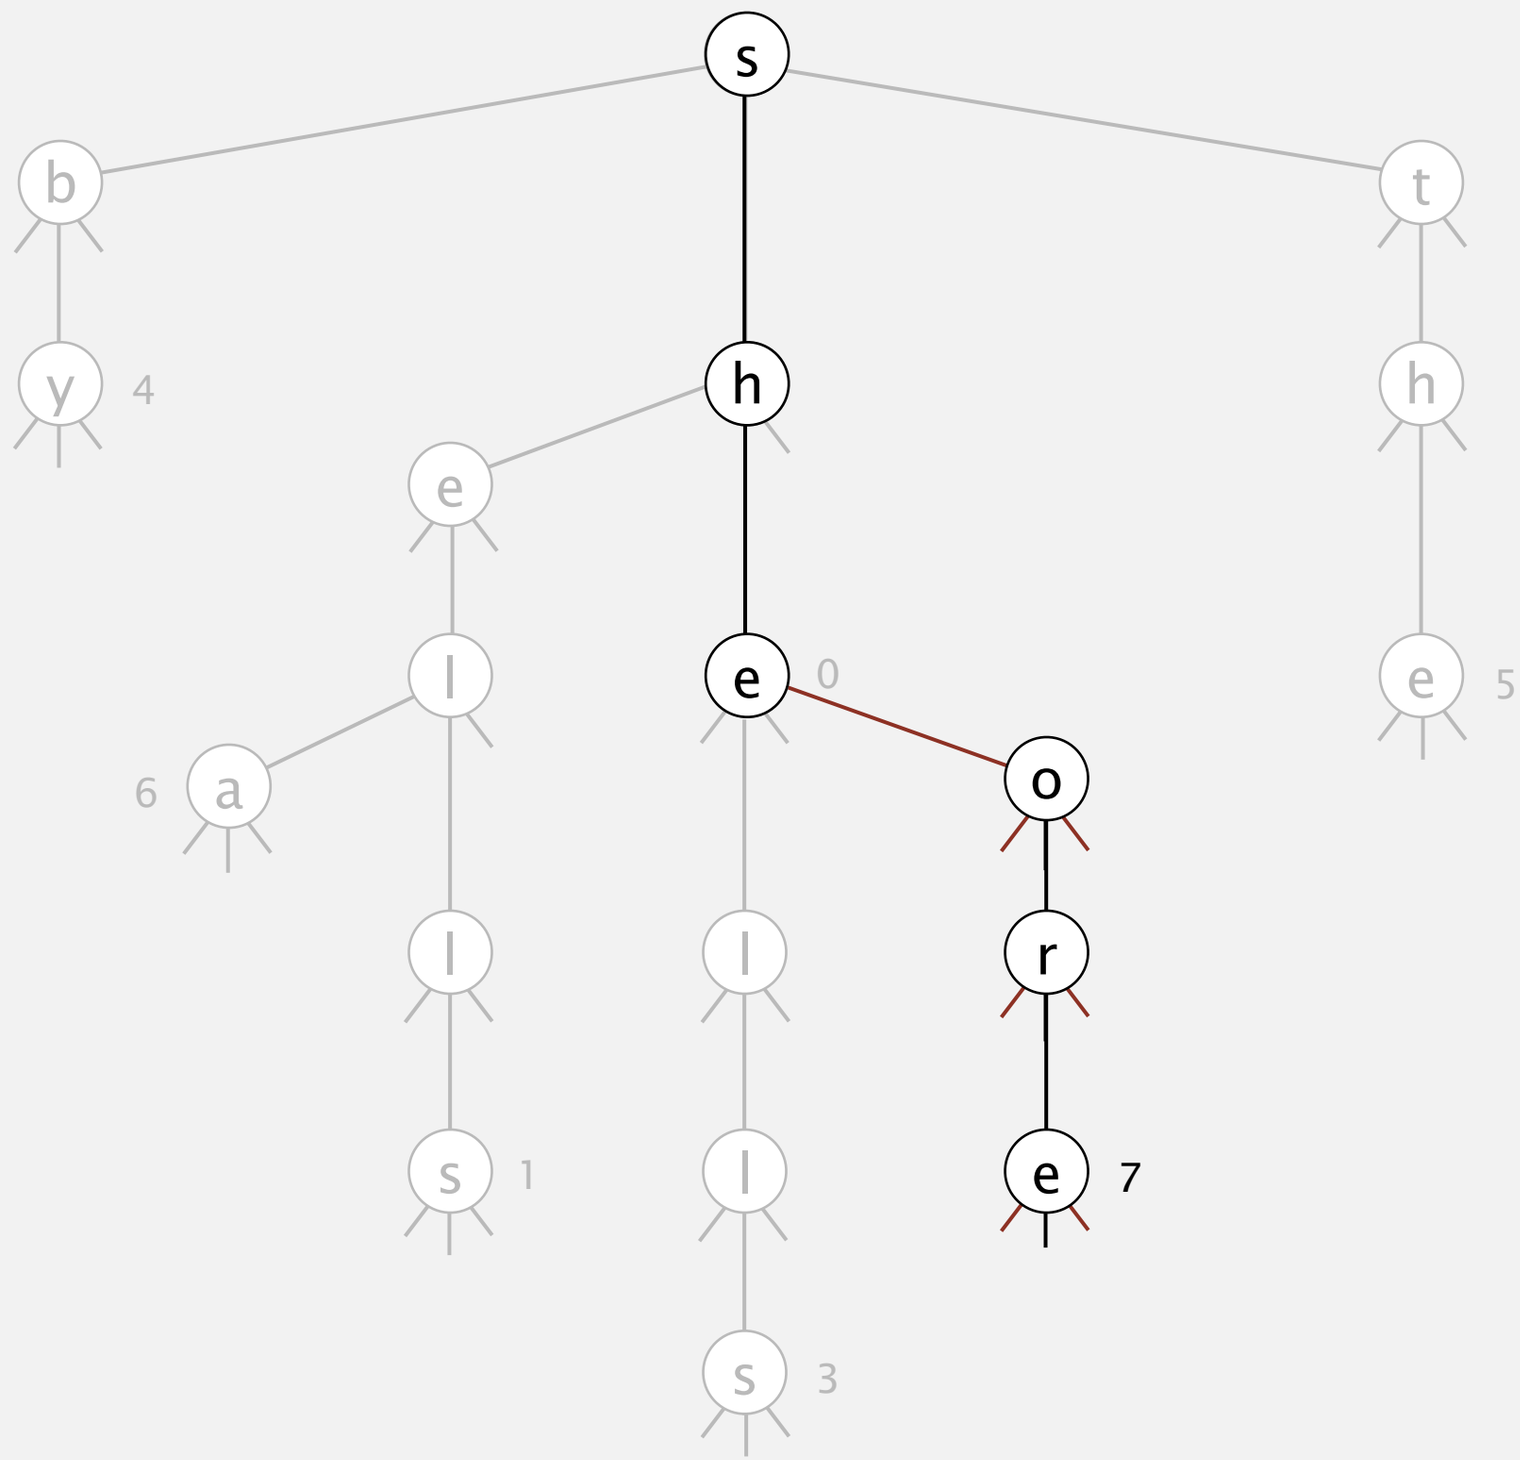

Ternary search trie insertion demo

ternary search trie

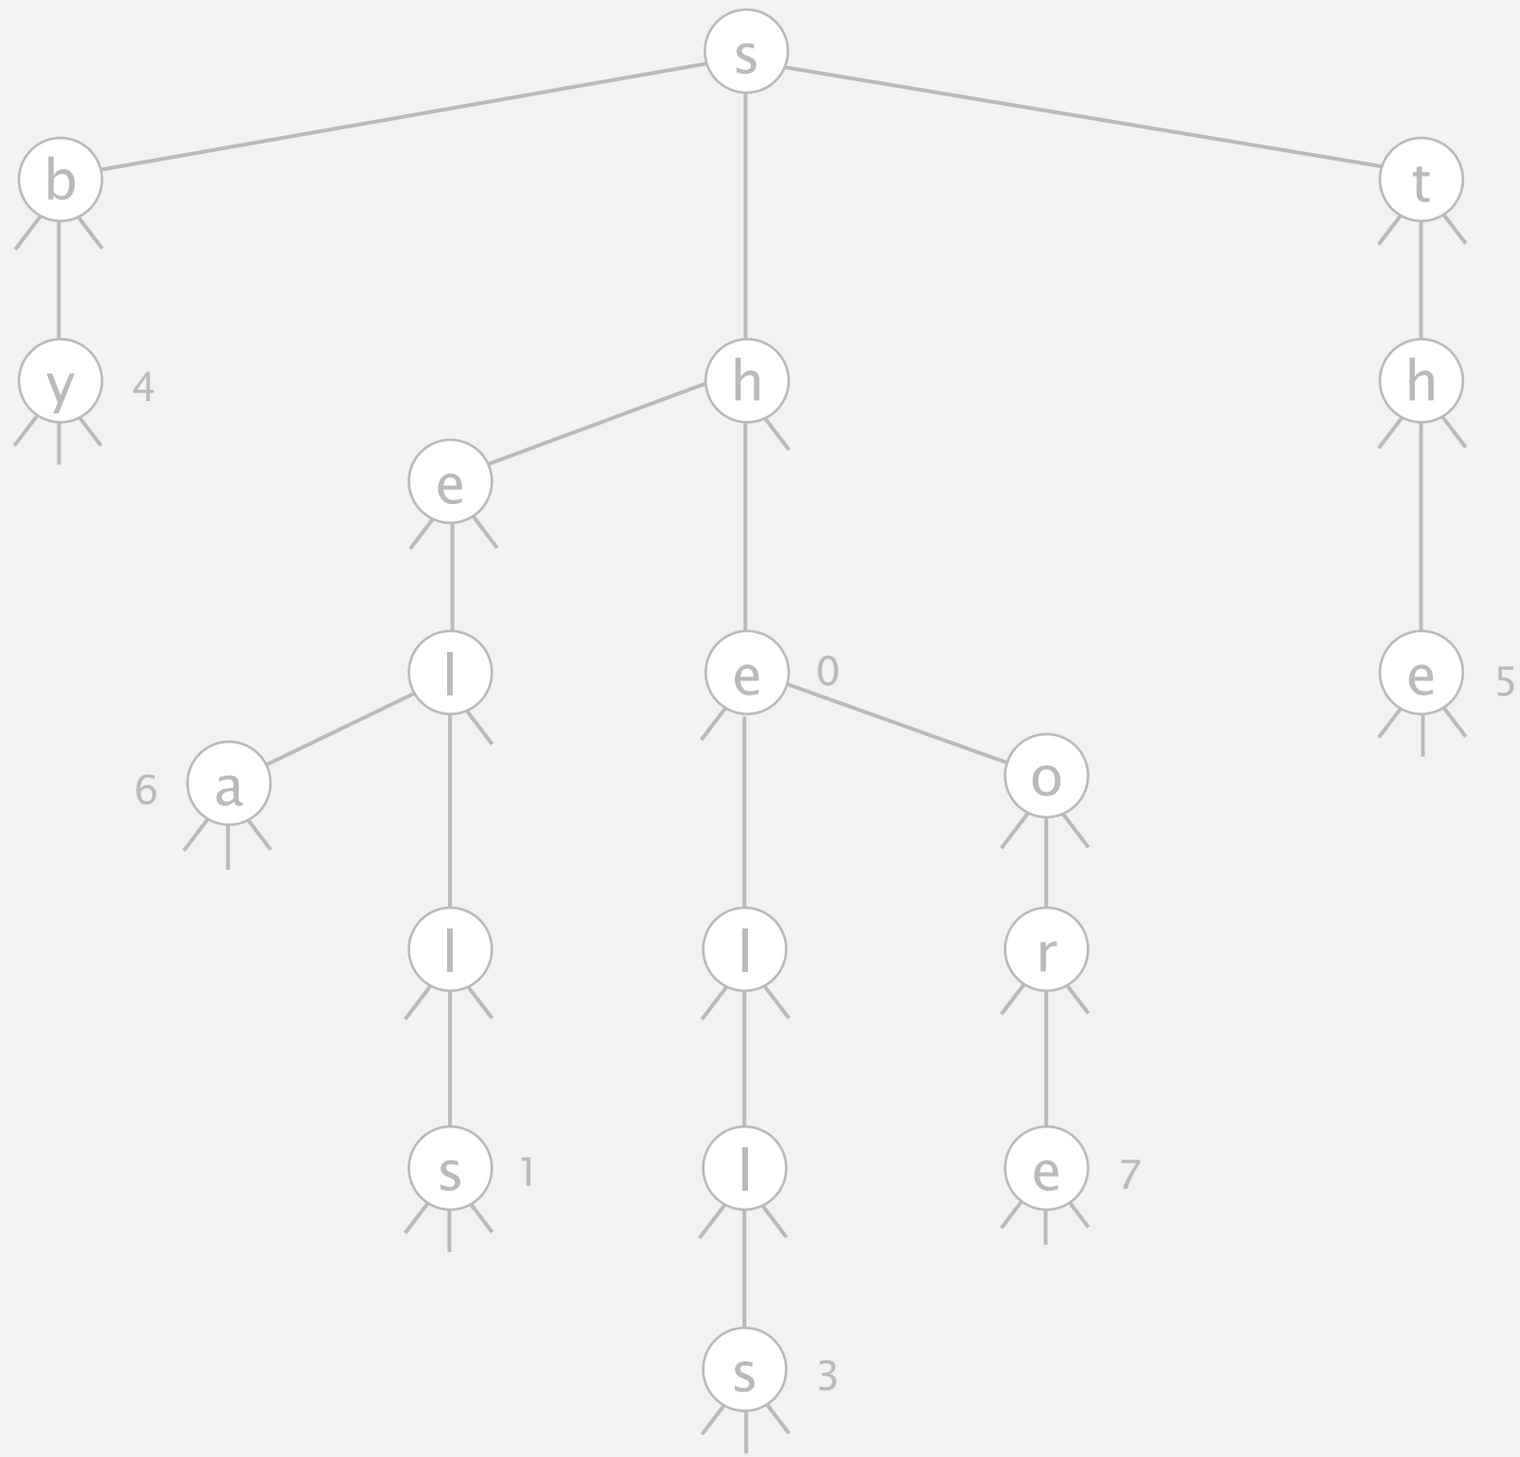

Ternary search trie insertion demo

ternary search trie

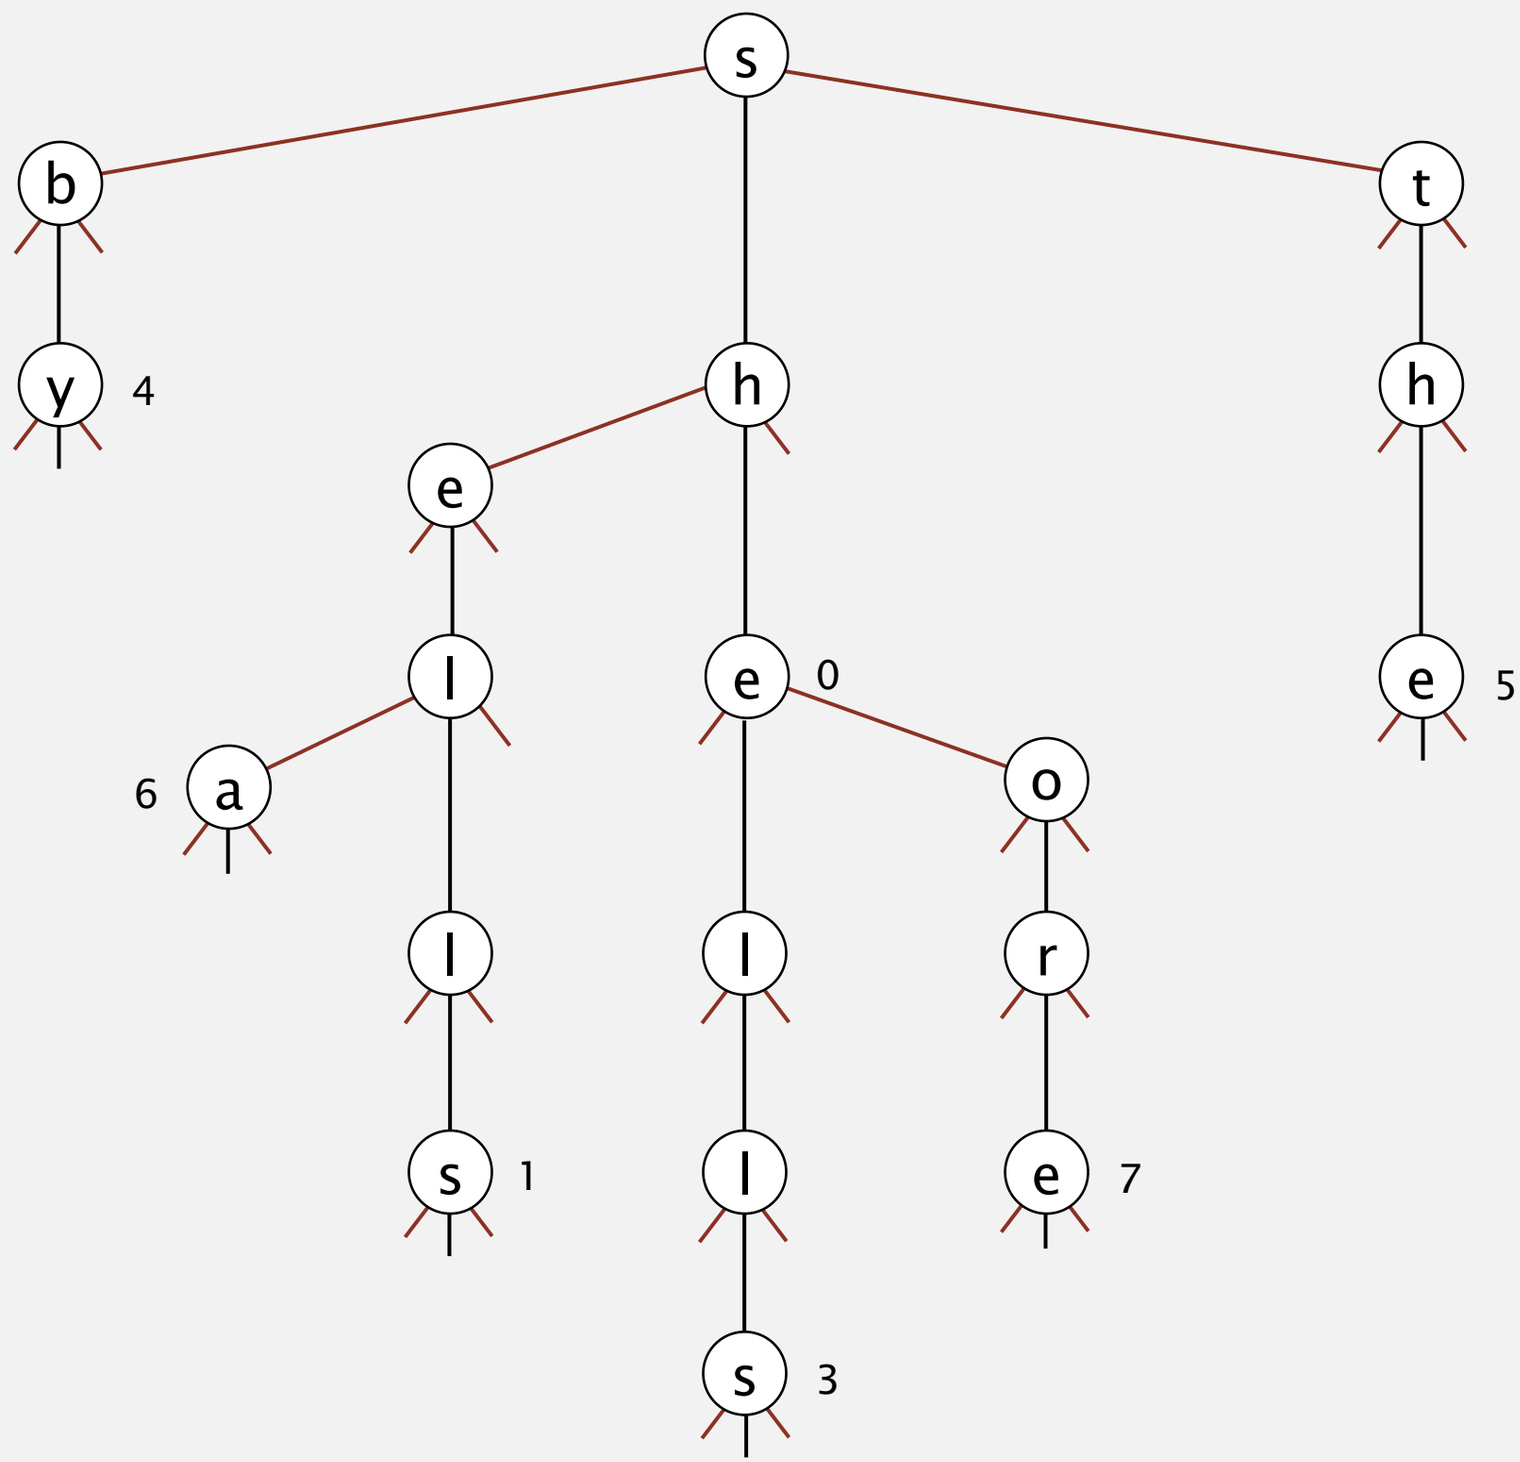

26-way trie vs. TST

26-way trie. 26 null links in each leaf.

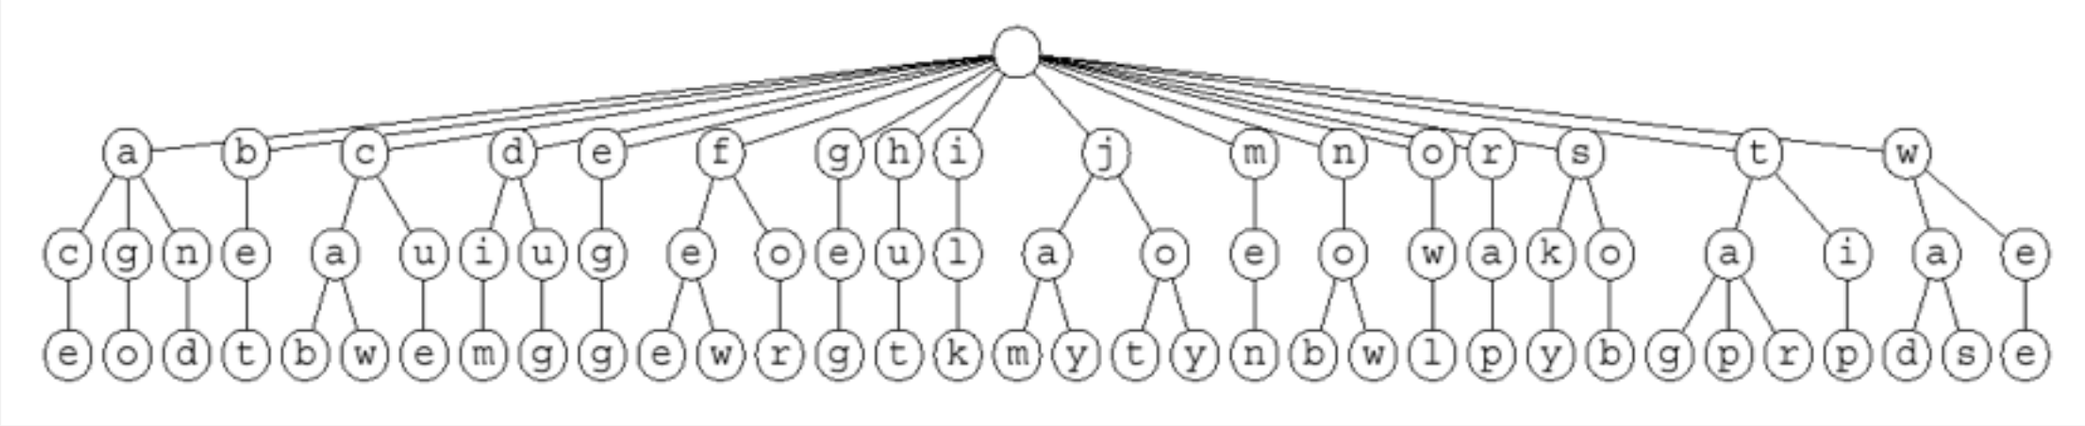

26-way trie (1035 null links, not shown)

TST. 3 null links in each leaf.

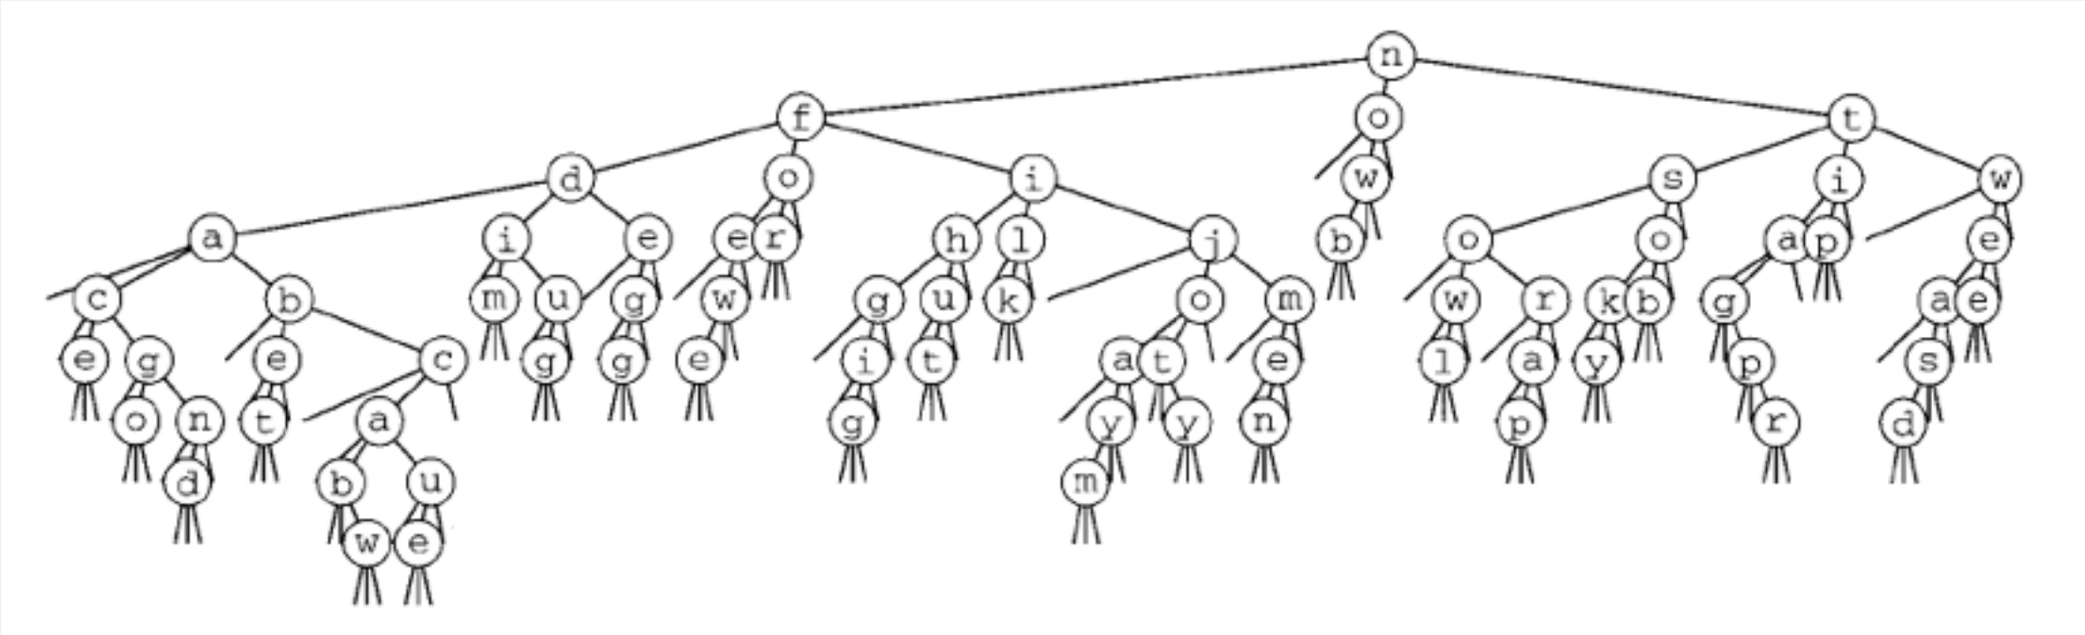

TST (155 null links)

now
for
tip
ilk
dim
tag
jot
sob
nob
sky
hut
ace
bet
men
egg
few
jay
owl
joy
rap
gig
wee
was
cab
wad
caw
cue
fee
tap
ago
tar
jam
dug
and

TST representation in Java

A TST node is five fields:

- A value.
- A character c.
- A reference to a left TST.
- A reference to a middle TST.
- A reference to a right TST.

```
private class Node
{
   private Value val;
   private char c;
   private Node left, mid, right;
}
```

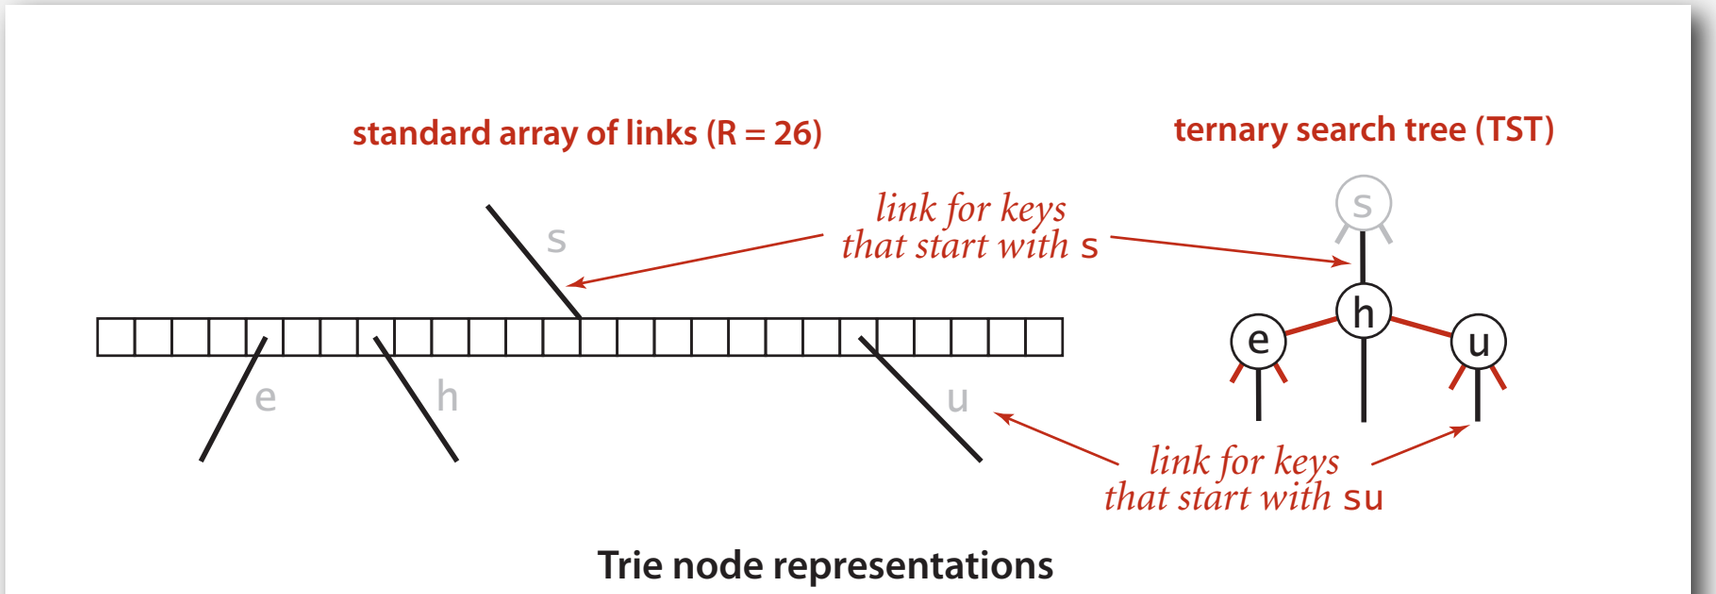

TST: Java implementation

```
public class TST<Value>
{
   private Node root;

   private class Node
   {  /* see previous slide */  }

   public void put(String key, Value val)
   {  root = put(root, key, val, 0);  }

   private Node put(Node x, String key, Value val, int d)
   {
      char c = key.charAt(d);
      if (x == null) {  x = new Node(); x.c = c;  }
      if      (c < x.c)              x.left  = put(x.left,  key, val, d);
      else if (c > x.c)              x.right = put(x.right, key, val, d);
      else if (d < key.length() - 1) x.mid   = put(x.mid,   key, val, d+1);
      else                           x.val   = val;
      return x;
   }

   ⋮
```

TST: Java implementation (continued)

```
⋮
public boolean contains(String key)
{  return get(key) != null;  }

public Value get(String key)
{
   Node x = get(root, key, 0);
   if (x == null) return null;
   return x.val;
}

   private Node get(Node x, String key, int d)
   {
      if (x == null) return null;
      char c = key.charAt(d);
      if      (c < x.c)              return get(x.left,  key, d);
      else if (c > x.c)              return get(x.right, key, d);
      else if (d < key.length() - 1) return get(x.mid,   key, d+1);
      else                           return x;
   }
}
```

String symbol table implementation cost summary

	character accesses (typical case)				dedup	
implementation	search hit	search miss	insert	space (references)	moby.txt	actors.txt
red-black BST	$L + c \lg^2 N$	$c \lg^2 N$	$c \lg^2 N$	$4 N$	1,4	97,4
hashing (linear probing)	L	L	L	$4 N$ to $16 N$	0,76	40,6
R-way trie	L	$\log_R N$	L	$(R + 1) N$	1,12	out of memory
TST	$L + \ln N$	$\ln N$	$L + \ln N$	$4 N$	0,72	38,7

Remark. Can build balanced TSTs via rotations to achieve $L + \log N$ worst-case guarantees.

Bottom line. TST is as fast as hashing (for string keys), space efficient.

TST vs. hashing

Hashing.

- Need to examine entire key.
- Search hits and misses cost about the same.
- Performance relies on hash function.
- Does not support ordered symbol table operations.

TSTs.

- Works only for strings (or digital keys).
- Only examines just enough key characters.
- Search miss may involve only a few characters.
- Supports ordered symbol table operations (plus others!).

Bottom line. TSTs are:

- Faster than hashing (especially for search misses).
  More flexible than red-black BSTs. [stay tuned]

Previously on BBM202..

Tries.

- Store characters in nodes (not keys).
- Each node has R children, one for each possible character.
- Store values in nodes corresponding to last characters in keys.

Ternary Search Trees (TSTs)

- Store characters and values in nodes (not keys).
- Each node has three children: smaller (left), equal (middle), larger (right).

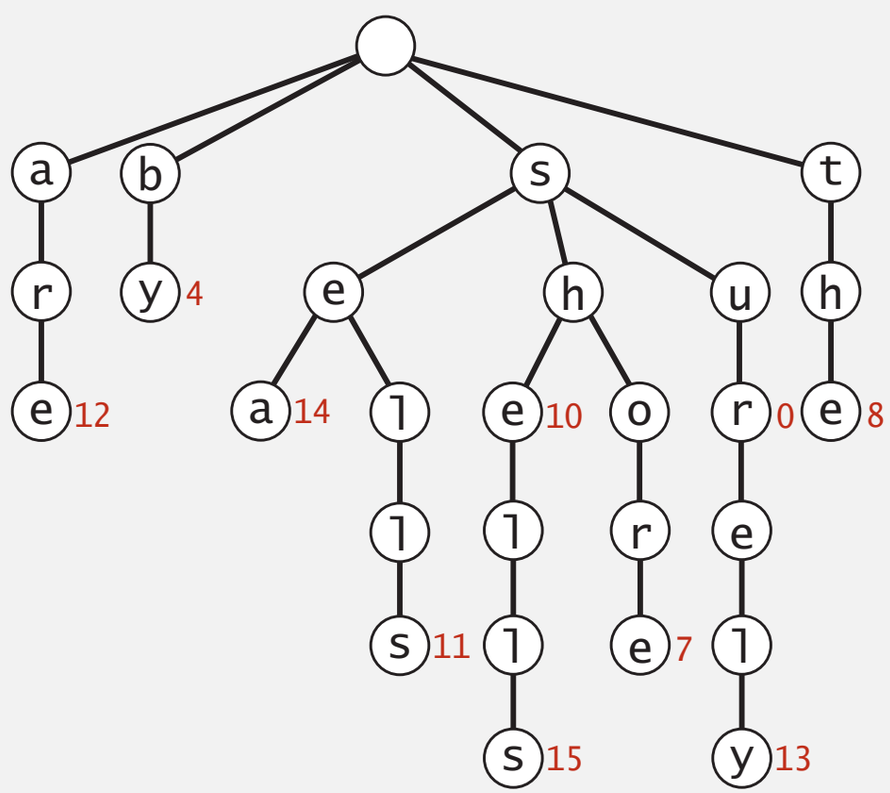

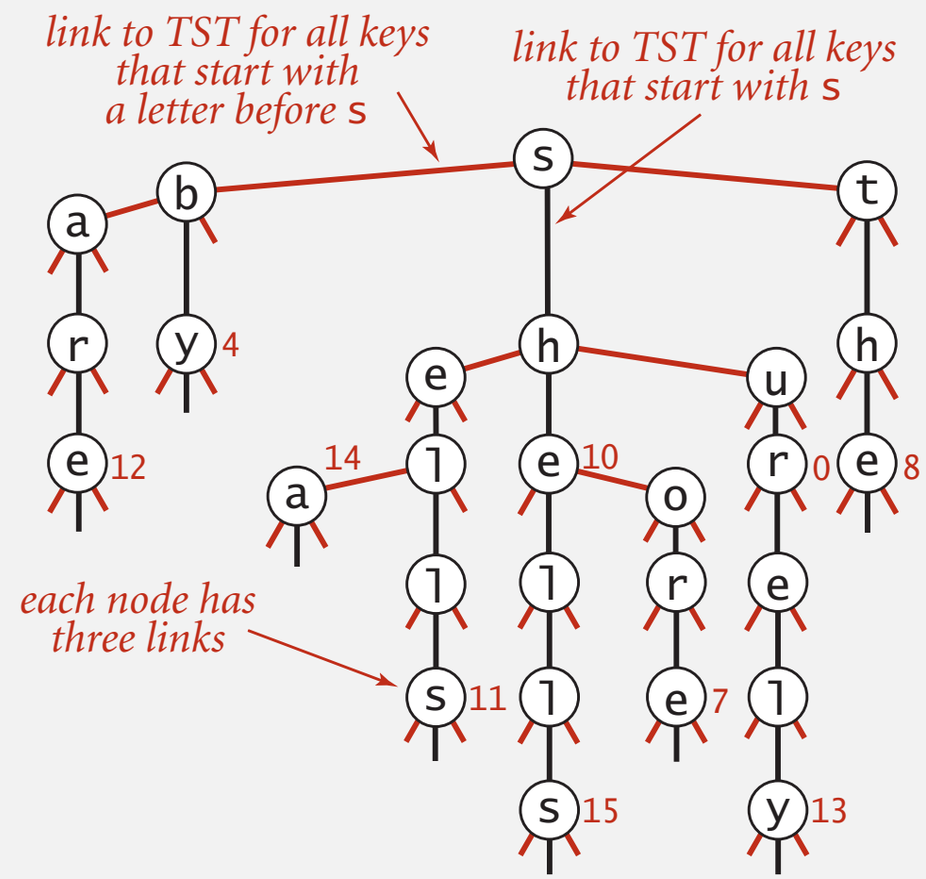

TST representation of a trie

Tries

- R-way tries
- Ternary search tries
- Character-based operations

String symbol table API

Character-based operations. The string symbol table API supports several useful character-based operations.

key	value
by	4
sea	6
sells	1
she	0
shells	3
shore	7
the	5

Prefix match. Keys with prefix `"sh"`: `"she"`, `"shells"`, and `"shore"`.

Wildcard match. Keys that match `".he"`: `"she"` and `"the"`.

Longest prefix. Key that is the longest prefix of `"shellsort"`: `"shells"`.

String symbol table API

public class StringST<Value>	
StringST()	*create a symbol table with string keys*
void put(String key, Value val)	*put key-value pair into the symbol table*
Value get(String key)	*value paired with key*
void delete(String key)	*delete key and corresponding value*
⋮	
Iterable<String> keys()	*all keys*
Iterable<String> keysWithPrefix(String s)	*keys having s as a prefix*
Iterable<String> keysThatMatch(String s)	*keys that match s (where . is a wildcard)*
String longestPrefixOf(String s)	*longest key that is a prefix of s*

Remark. Can also add other ordered ST methods, e.g., `floor()` and `rank()`.

Warmup: ordered iteration

To iterate through all keys in sorted order:

- Do inorder traversal of trie; add keys encountered to a queue.
- Maintain sequence of characters on path from root to node.

```
keysWithPrefix("");

   key     q
     b
    by     by
     s
    se
   sea     by sea
   sel
  sell
 sells     by sea sells
    sh
   she     by sea sells she
 shell
shells     by sea sells she shells
   sho
  shor
 shore     by sea sells she shells shore
     t
    th
   the     by sea sells she shells shore the
```

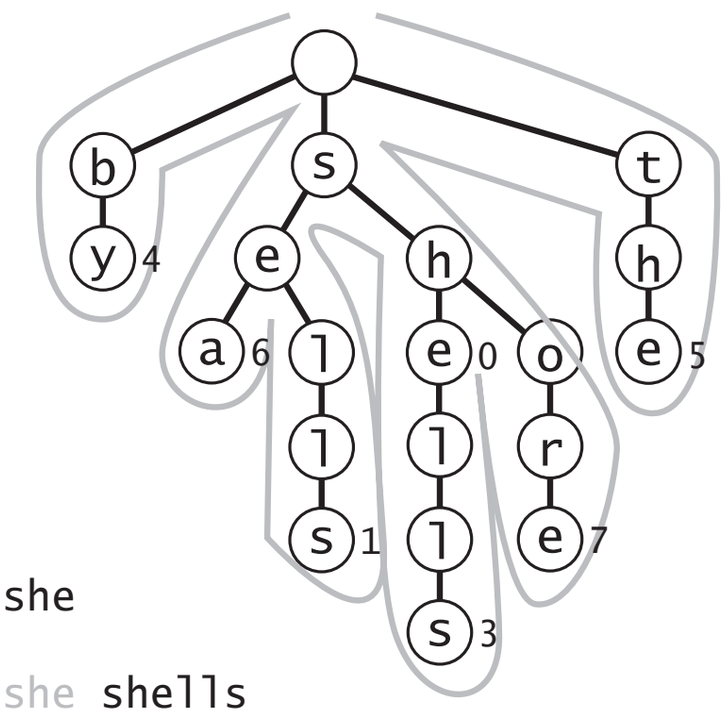

Ordered iteration: Java implementation

To iterate through all keys in sorted order:

- Do inorder traversal of trie; add keys encountered to a queue.
- Maintain sequence of characters on path from root to node.

```
public Iterable<String> keys()
{
   Queue<String> queue = new Queue<String>();
   collect(root, "", queue);
   return queue;
}

private void collect(Node x, String prefix, Queue<String> q)
{
   if (x == null) return;
   if (x.val != null) q.enqueue(prefix);
   for (char c = 0; c < R; c++)
      collect(x.next[c], prefix + c, q);
}
```

sequence of characters on path from root to x

Prefix matches

Find all keys in symbol table starting with a given prefix.

Ex. Autocomplete in a cell phone, search bar, text editor, or shell.

- User types characters one at a time.
- System reports all matching strings.

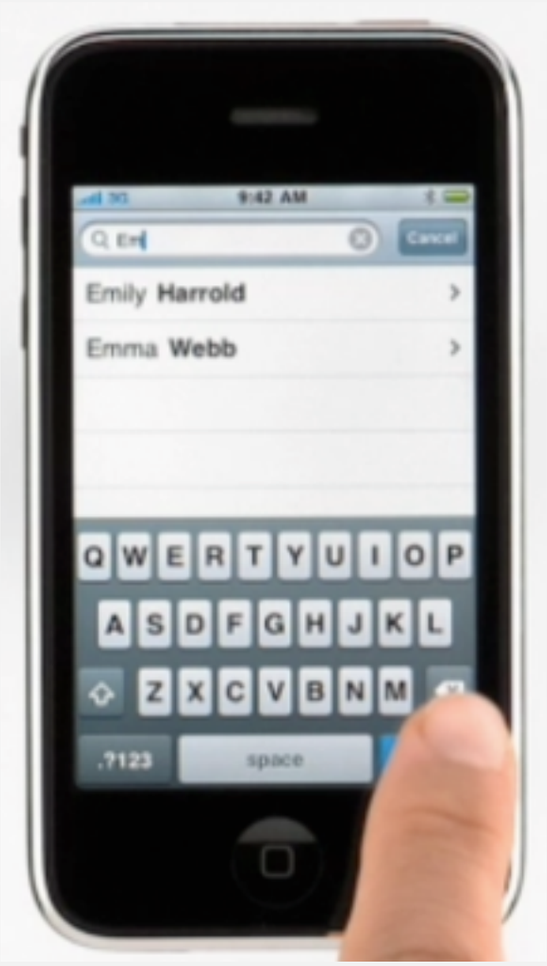

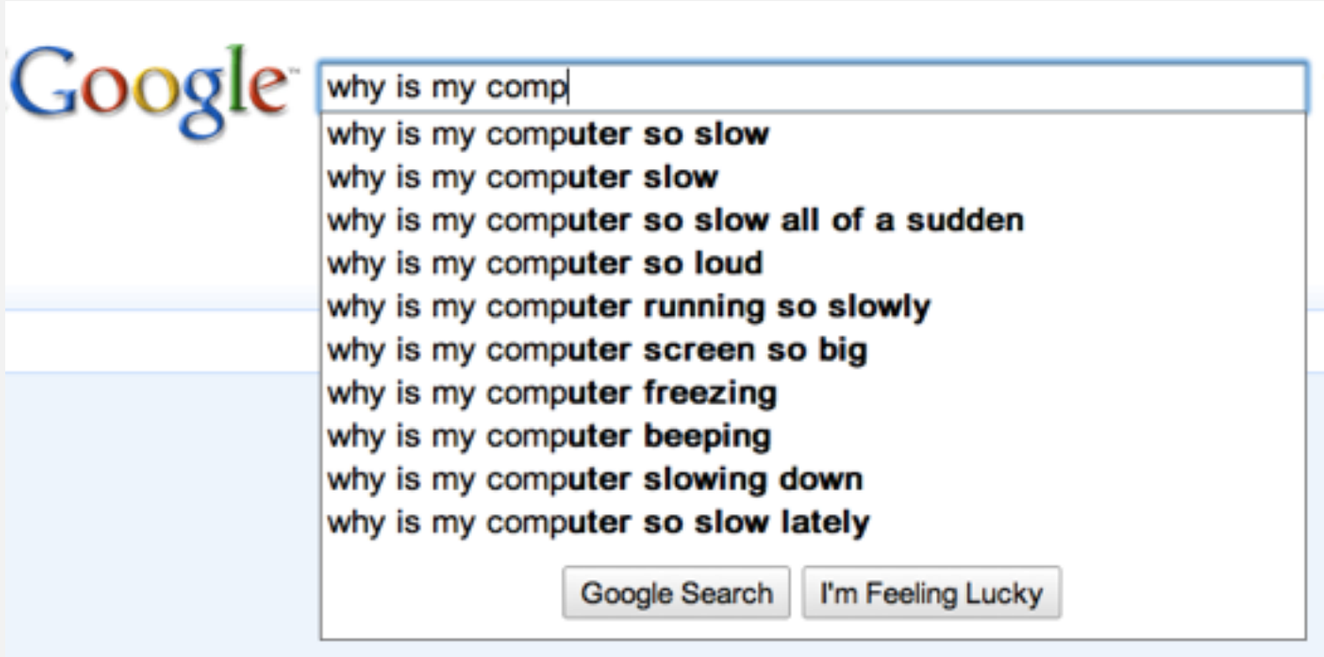

Prefix matches

Find all keys in symbol table starting with a given prefix.

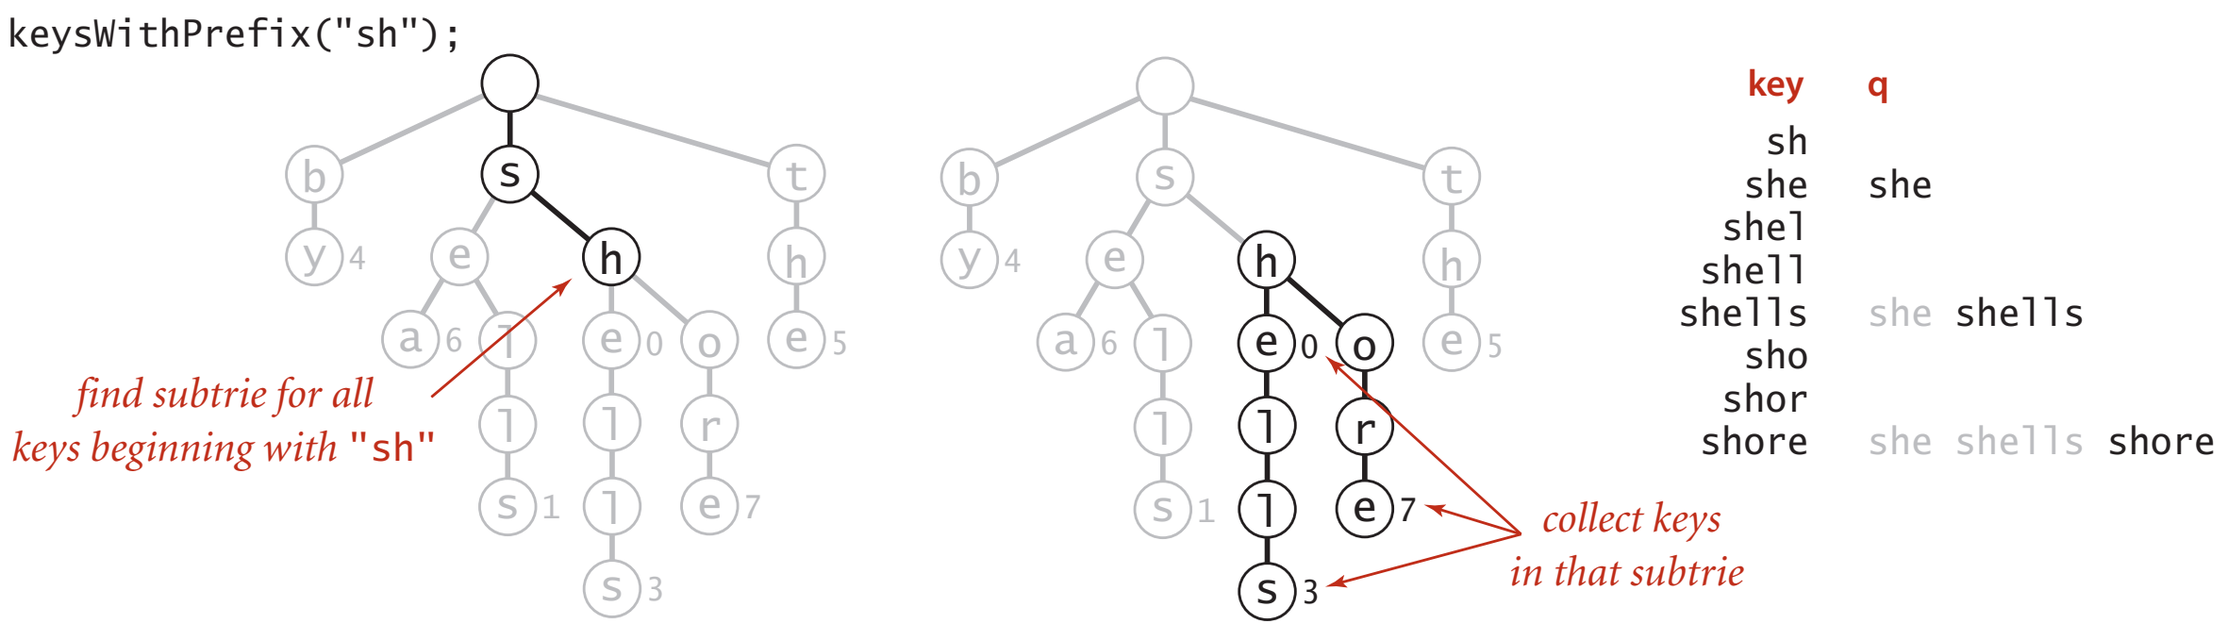

Prefix match in a trie

```
public Iterable<String> keysWithPrefix(String prefix)
{
   Queue<String> queue = new Queue<String>();
   Node x = get(root, prefix, 0);
   collect(x, prefix, queue);
   return queue;
}
```

root of subtrie for all strings beginning with given prefix

Wildcard matches

Use wildcard . to match any character in alphabet.

co....er	.c...c.
coalizer	acresce
coberger	acroach
codifier	acuracy
cofaster	octarch
cofather	science
cognizer	scranch
cohelper	scratch
colander	scrauch
coleader	screich
...	scrinch
compiler	scritch
...	scrunch
composer	scudick
computer	scutock
cowkeper	

Wildcard matches

Search as usual if character is not a period;

go down all R branches if query character is a period.

```
public Iterable<String> keysThatMatch(String pat)
{
   Queue<String> queue = new Queue<String>();
   collect(root, "", 0, pat, queue);
   return queue;
}
```

```
private void collect(Node x, String prefix, String pat, Queue<String> q)
{
   if (x == null) return;
   int d = prefix.length();
   if (d == pat.length() && x.val != null) q.enqueue(prefix);
   if (d == pat.length()) return;
   char next = pat.charAt(d);
   for (char c = 0; c < R; c++)
       if (next == '.' || next == c)
           collect(x.next[c], prefix + c, pat, q);
}
```

Longest prefix

Find longest key in symbol table that is a prefix of query string.

Ex. To send packet toward destination IP address, router chooses IP address in routing table that is longest prefix match.

```
"128"
"128.112"
"128.112.055"
"128.112.055.15"
"128.112.136"
"128.112.155.11"
"128.112.155.13"
"128.222"
"128.222.136"
```

represented as 32-bit binary number for IPv4 (instead of string)

```
longestPrefixOf("128.112.136.11") = "128.112.136"
longestPrefixOf("128.112.100.16") = "128.112"
longestPrefixOf("128.166.123.45") = "128"
```

Note. Not the same as floor: `floor("128.112.100.16") = "128.112.055.15"`

Longest prefix

Find longest key in symbol table that is a prefix of query string.

- Search for query string.
- Keep track of longest key encountered.

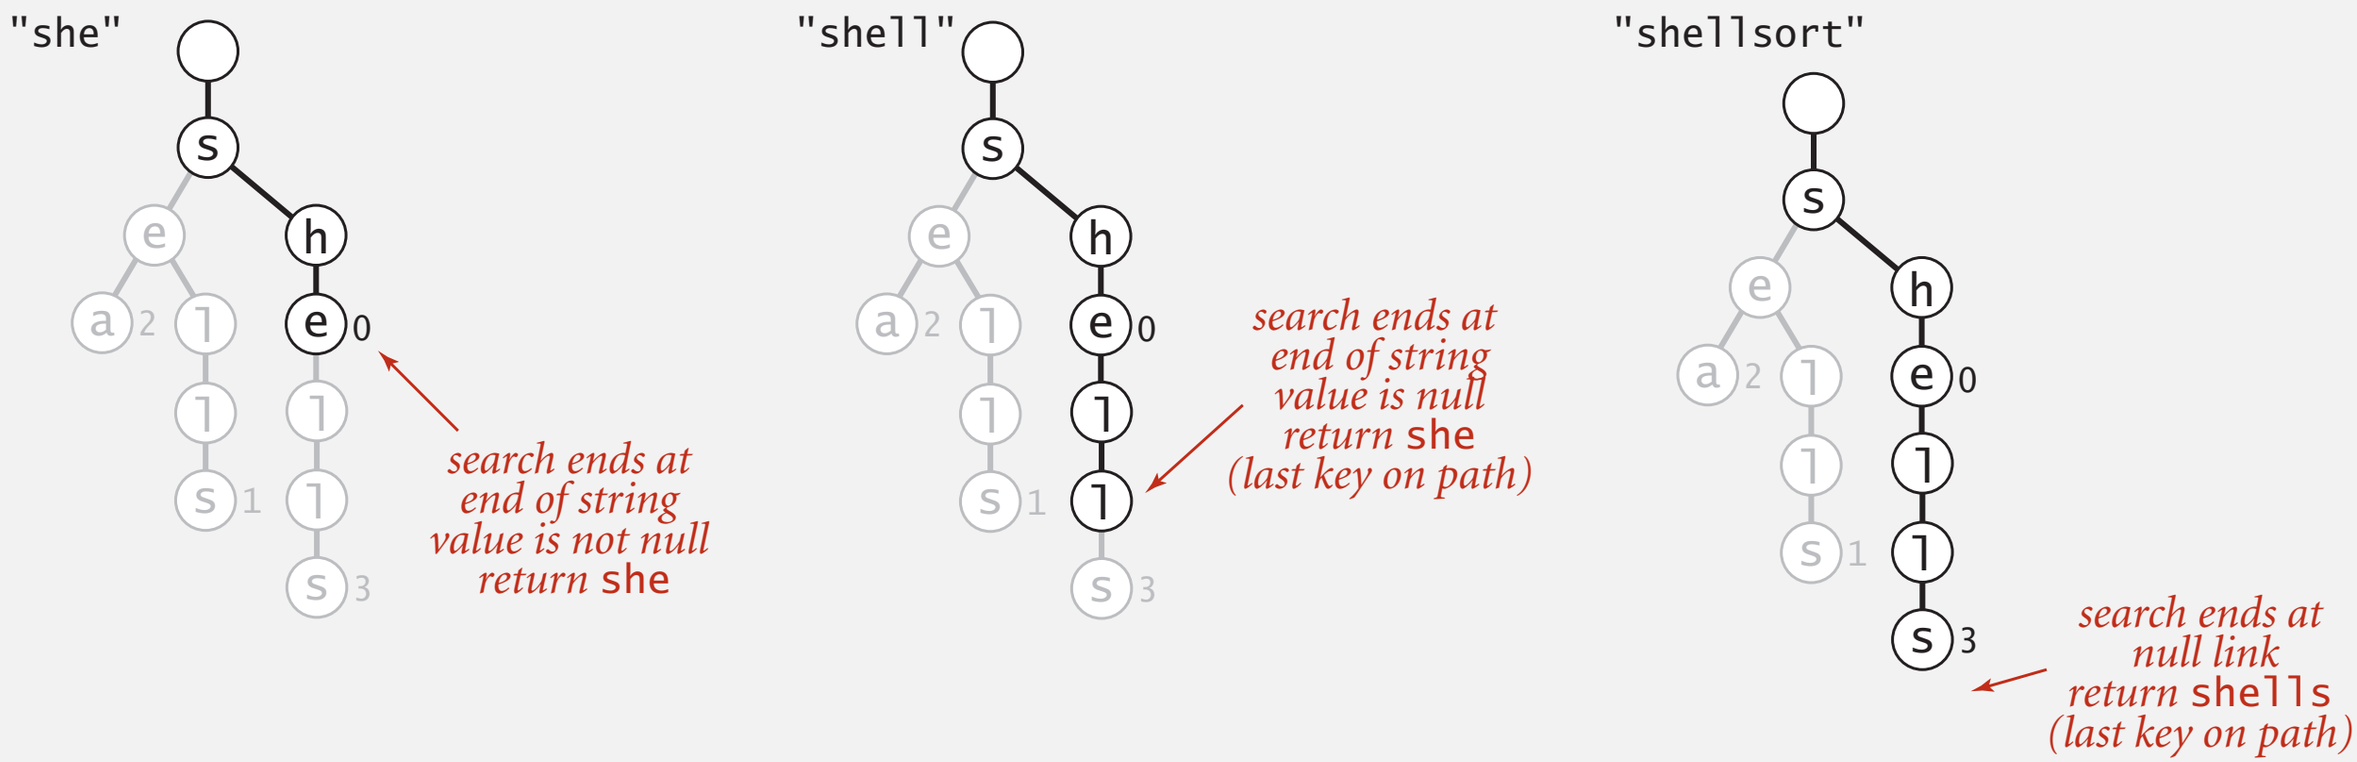

Possibilities for `longestPrefixOf()`

Longest prefix: Java implementation

Find longest key in symbol table that is a prefix of query string.

- Search for query string.
- Keep track of longest key encountered.

```
public String longestPrefixOf(String query)
{
   int length = search(root, query, 0, 0);
   return query.substring(0, length);
}

private int search(Node x, String query, int d, int length)
{
   if (x == null) return length;
   if (x.val != null) length = d;
   if (d == query.length()) return length;
   char c = query.charAt(d);
   return search(x.next[c], query, d+1, length);
}
```

T9 texting

Goal. Type text messages on a phone keypad.

Multi-tap input. Enter a letter by repeatedly pressing a key until the desired letter appears.

"a much faster and more fun way to enter text"

T9 text input.

- Find all words that correspond to given sequence of numbers.
- Press 0 to see all completion options.

Ex. `hello`

- Multi-tap: `4 4 3 3 5 5 5 5 5 5 6 6 6`
- T9: `4 3 5 5 6`

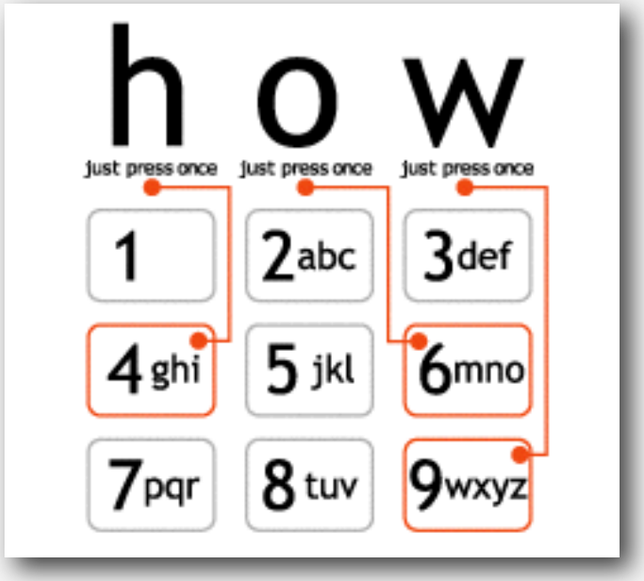

www.t9.com

A world without “s” ??

```
To: "'Kevin Wayne'" <wayne@CS.Princeton.EDU>
Date: Tue, 25 Oct 2005 12:44:42 -0700

Thank you Kevin.

I am glad that you find T9 o valuable for your
cla.  I had not noticed thi before.  Thank for
writing in and letting u know.

Take care,

Brooke nyder
OEM Dev upport
AOL/Tegic Communication
1000 Dexter Ave N. uite 300
eattle, WA 98109

ALL INFORMATION CONTAINED IN THIS EMAIL IS CONSIDERED
CONFIDENTIAL AND PROPERTY OF AOL/TEGIC COMMUNICATIONS
```

Patricia trie

Patricia trie. [Practical Algorithm to Retrieve Information Coded in Alphanumeric]

- Remove one-way branching.
- Each node represents a sequence of characters.
- Implementation: one step beyond this course.

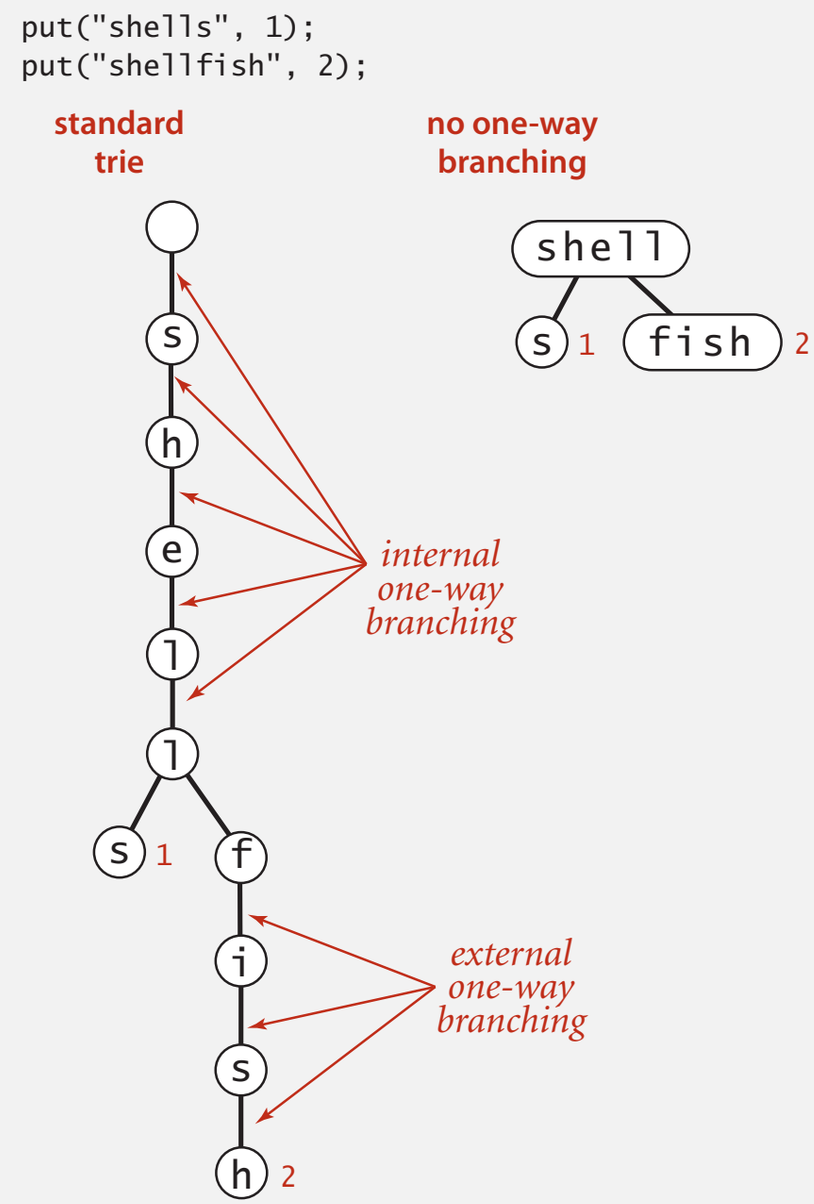

Applications.

- Database search.
- P2P network search.
- IP routing tables: find longest prefix match.
- Compressed quad-tree for N-body simulation.
- Efficiently storing and querying XML documents.

Also known as: crit-bit tree, radix tree.

Suffix tree

Suffix tree.

- Patricia trie of suffixes of a string.
- Linear-time construction: beyond this course.

suffix tree for BANANAS

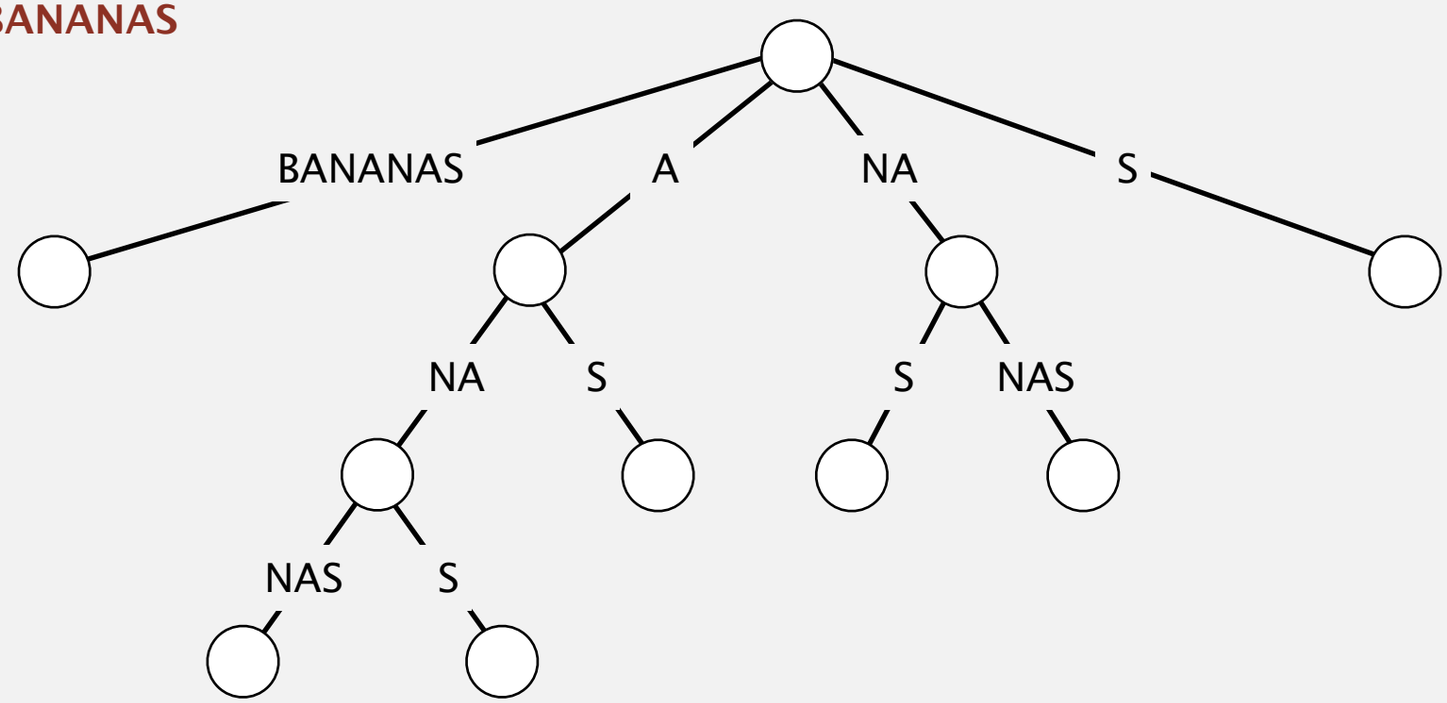

Applications.

- Linear-time: longest repeated substring, longest common substring, longest palindromic substring, substring search, tandem repeats, ….
- Computational biology databases (BLAST, FASTA).

String symbol tables summary

A success story in algorithm design and analysis.

Red-black BST.

- Performance guarantee: $\log N$ key compares.
- Supports ordered symbol table API.

Hash tables.

- Performance guarantee: constant number of probes.
- Requires good hash function for key type.

Tries. R-way, TST.

- Performance guarantee: $\log N$ characters accessed.
- Supports character-based operations.

Bottom line. You can get at anything by examining 50-100 bits (!!!)