

BBM402 Midterm Exam (Solutions)

Time: 14:00-16:00


26 November 2020

Question:	1	2	3	4	5	6	7	8	Total
Points:	14	10	12	12	18	12	12	10	100
Score:									

- (14 points) Write down the recursion tree for the N-queens algorithm below for $n = 3$. Show the positions of the queens at each node of the recursion tree.

```

RECURSIVENQUEENS(Q[1..n], r):
  if r = n + 1
    print Q
  else
    for j ← 1 to n
      legal ← TRUE
      for i ← 1 to r - 1
        if (Q[i] = j) or (Q[i] = j + r - i) or (Q[i] = j - r + i)
          legal ← FALSE
      if legal
        Q[r] ← j
        RECURSIVENQUEENS(Q[1..n], r + 1)
    
```

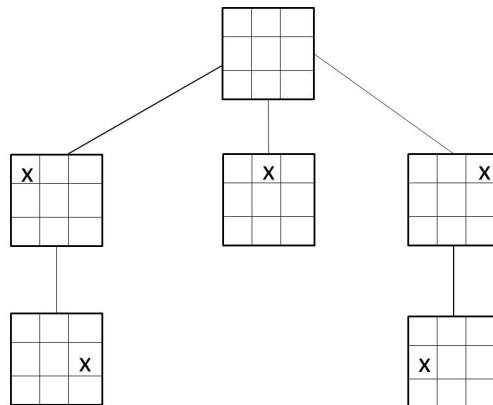

2. (10 points) Let $w = 0110$ an input for a turing machine. Which of the following are not valid for given configurations? (q_i represents any state's name)

Solution:

true: $q_10110 \vdash 0q_1110$
 true: $01q_110 \vdash 0q_2110$
 false: $011q_20 \vdash 0q_2110$
 false: $01q_110 \vdash 0q_2111$
 true: $01q_210 \vdash 0q_2010$

3. (12 points) The patients at a doctor's office are waiting for their appointment. There are n patients waiting and there are estimated times corresponding to each patient's problem. So, patient i requires t_i minutes to be examined. Say, if the patients were examined in the order t_1, t_2, \dots, t_i , then the i 'th patient's waiting time would be $\sum_{k=1}^i t_k$ minutes. Let the total waiting time be T below.

$$T = \sum_{i=1}^n \text{Total waiting time for patient } i$$

- (a) Give an algorithm that would find the optimal order minimizing T .
 (b) Give a short proof showing that your algorithm indeed outputs the minimum T .

Solution:

- (a) First order t_i 's in increasing order, then follow this order for examinations.
 (b) Assume that this order does not give the optimal solution (minimum T) and one of the optimal solutions has a pair of (t_i, t_j) such that $t_i > t_j$ and patient i comes before patient j . Switching the positions of t_i and t_j changes (only) the waiting time for patient i by t_j and the waiting time for patient j by $-t_i$, hence changing T by $t_j - t_i < 0$. Since this contradicts with the optimality of this solution, there cannot be any such pair in an optimal coloring.

4. (12 points) If L is a decidable language, determine which of the following are true/ false.

Solution:

- (a) true: L is recognizable
 (b) true: \bar{L} is recognizable

(c) true: \bar{L} is decidable

(d) true: There is a Turing machine that halts on all inputs, accepting every string in $*L*$.

5. (18 points) Let $X \leq_P Y$. Determine whether the following are true/ false.

Solution:

(a) false: X is in P

(b) true: If Y is in P, then X is in P.

(c) true: If X is NP-hard, then Y is NP-hard.

(d) false: Y is NP-hard.

(e) false: If $SAT \leq_P Y$, then X is NP-hard.

(f) true: If $SAT \leq_P X$, then Y is NP-hard.

6. The recursion tree for the algorithm RecFibo has running time, the leaves are always 0 or 1.

(a) (6 points) Use induction on n to show that there are exactly F_n 1's and F_{n-1} 0's as the leaves.

(b) (6 points) In that case, how many intermediate nodes does this full binary tree with have? Show all your work to receive full credit.

```
RECFIBO(n):  
  if (n < 2)  
    return n  
  else  
    return RECFIBO(n - 1) + RECFIBO(n - 2)
```

Solution:

(a) Since we are showing that there are exactly F_n 1's and F_{n-1} 0's as the leaves in the recursion tree calculating F_n , the base case has $n = 1$ and $n = 2$.

Base case:

The tree for $n = 1$ has $F_1 = 1$ 1's (the root) and $F_0 = 0$ 0's.

The tree for $n = 2$ has $F_2 = 1$ 1's and $F_1 = 1$ 0's.

Inductive case: Assuming that the claim holds for the recursion tree calculating F_{n-1} , call it T_1 , and F_{n-2} , call it T_2 (by the induction hypothesis), we prove it for F_n . The recursion tree for F_n has a root vertex whose children are the roots of the subtrees T_1 and T_2 . Hence, we have:

- F_{n-1} 1's in T_1 and F_{n-2} 1's in T_2 giving a total of F_n 1's as the leaves,
- F_{n-2} 0's in T_1 and F_{n-3} 1's in T_2 giving a total of F_{n-1} 0's as the leaves.

- (b) Let i be the number of intermediate vertices, ℓ be the number of leaves, and x be the total number of vertices. We have $x = i + \ell$.

If we direct the edges in the tree away from the root and obtain a directed tree, all internal vertices become parents of exactly two vertices, except the leaves. So, $2i = x - 1$, where we subtract 1 because all vertices but the root has a parent. Combining this with $x = i + \ell$, we get $2i = i + \ell - 1$. So, $i = \ell - 1 = F_n + F_{n-1} - 1 = F_{n+1} - 1$.

7. (12 points) Determine whether the following statements are true/false for a graph G on n vertices that has an independent set with k vertices.

Solution:

- (a) (3 points) false: The complement of G has a vertex cover with k vertices
- (b) (3 points) true: G has a vertex cover with $n - k$ vertices
- (c) (3 points) true: The complement of G has a clique with k vertices
- (d) (3 points) false: G has a vertex cover with k vertices

8. (10 points) Write the following formulas ϕ_1 and ϕ_2 as a 3-CNF (Conjunctive Normal Form), call them ϕ'_1 and ϕ'_2 , so that ϕ_1 is satisfiable if and only if ϕ'_1 is satisfiable, and ϕ_2 is satisfiable if and only if ϕ'_2 is satisfiable:

$$\phi_1 = (x_1 \vee x_2 \vee \neg x_4) \wedge (x_2 \vee \neg x_3) \wedge x_5$$

$$\phi_2 = x_1 \vee x_2 \vee \neg x_3 \vee x_4 \vee \neg x_5$$

Solution:

$$\phi'_1 = (x_1 \vee x_2 \vee \neg x_4) \wedge (x_2 \vee \neg x_3 \vee u) \wedge (x_2 \vee \neg x_3 \vee \neg u) \wedge (x_5 \vee v \vee w) \wedge (x_5 \vee v \vee \neg w) \wedge (x_5 \vee \neg v \vee w) \wedge (x_5 \vee \neg v \vee \neg w)$$

$$\phi'_2 = (x_1 \vee x_2 \vee u_1) \wedge (\neg x_3 \vee \neg u_1 \vee u_2) \wedge (x_4 \vee \neg x_5 \vee \neg u_2)$$