

BBM 202 - ALGORITHMS



HACETTEPE UNIVERSITY

DEPT. OF COMPUTER ENGINEERING

MERGESORT

Acknowledgement: The course slides are adapted from the slides prepared by R. Sedgwick and K. Wayne of Princeton University.

Mergesort

Basic plan.


- Divide array into two halves.
- **Recursively** sort each half.
- Merge two halves.

input	M	E	R	G	E	S	O	R	T	E	X	A	M	P	L	E	
sort left half	E	E	G	M	O	R	R	S		T	E	X	A	M	P	L	E
sort right half	E	E	G	M	O	R	R	S		A	E	E	L	M	P	T	X
merge results	A	E	E	E	E	G	L	M	M	O	P	R	R	S	T	X	

Mergesort overview


**First Draft
of a
Report on the
EDVAC**

John von Neumann

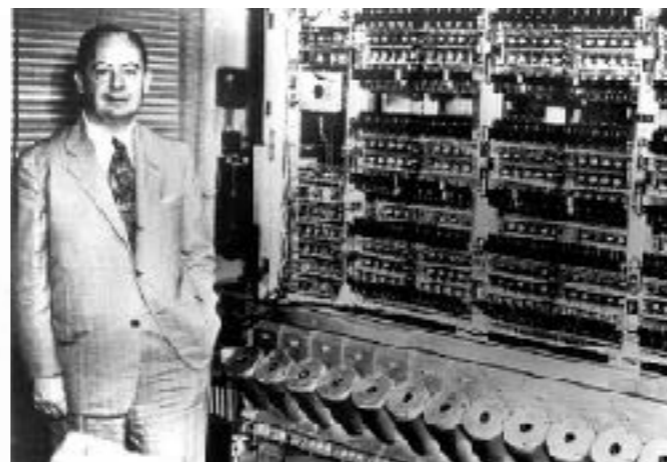


Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

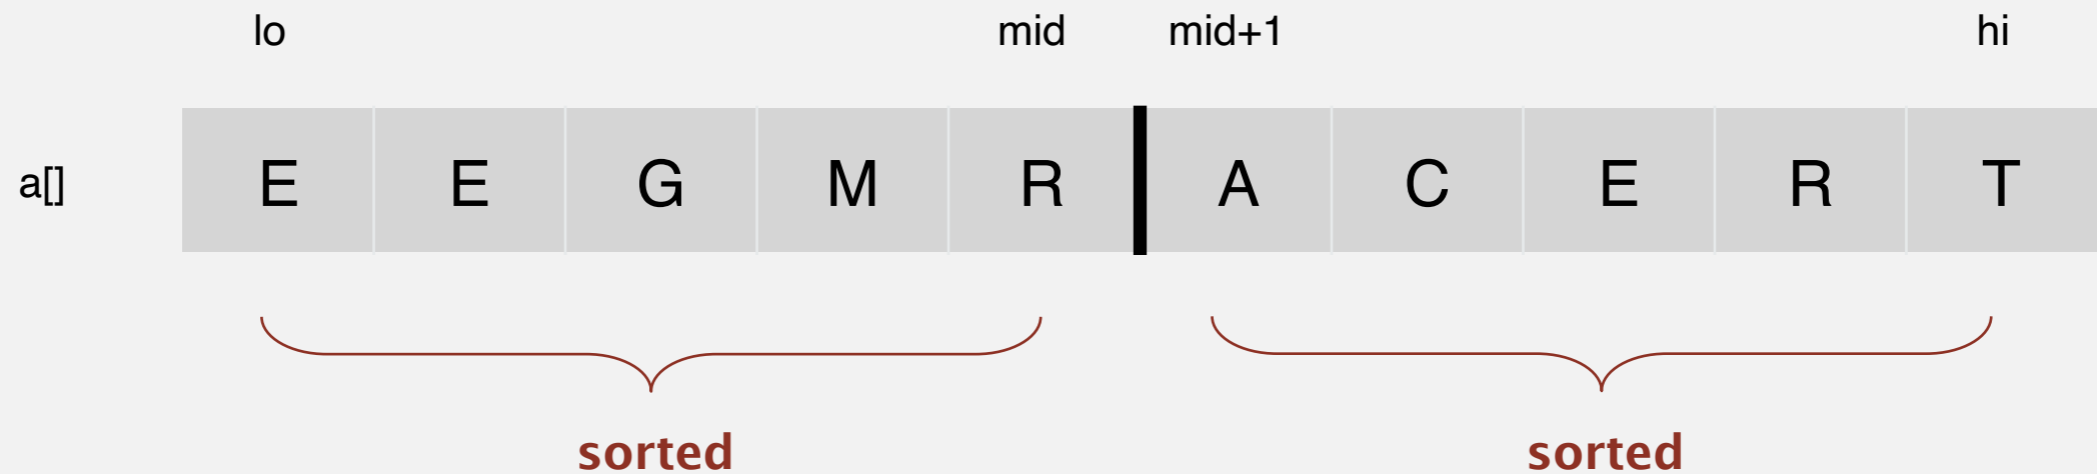


Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

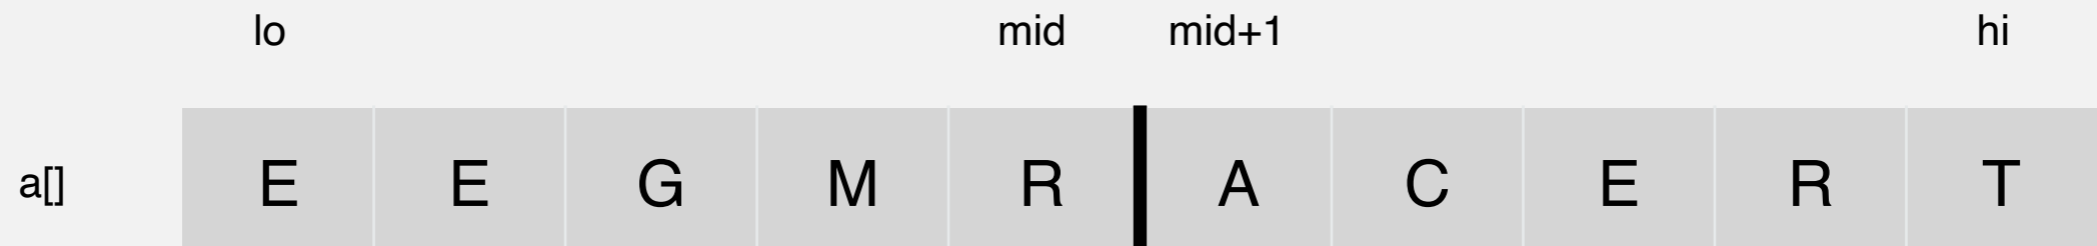


copy to auxiliary array

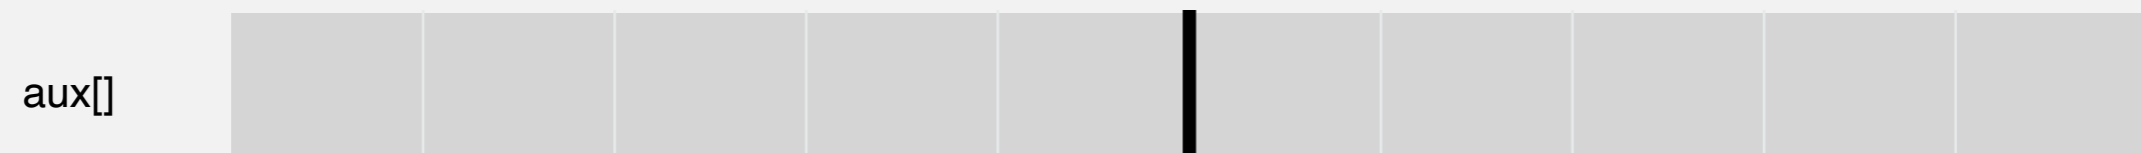


Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

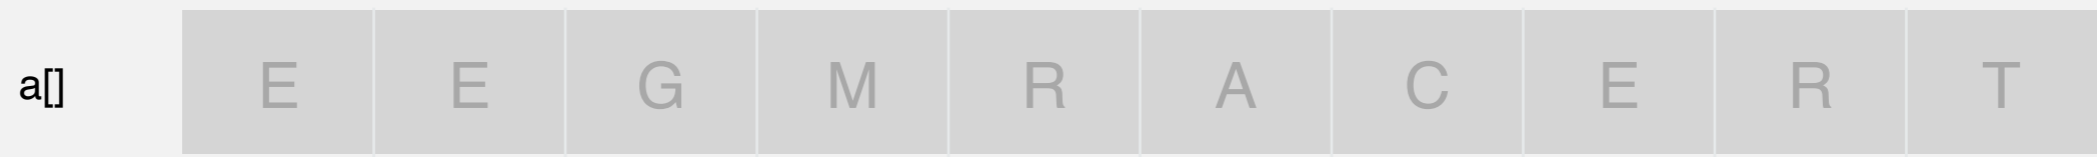


Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

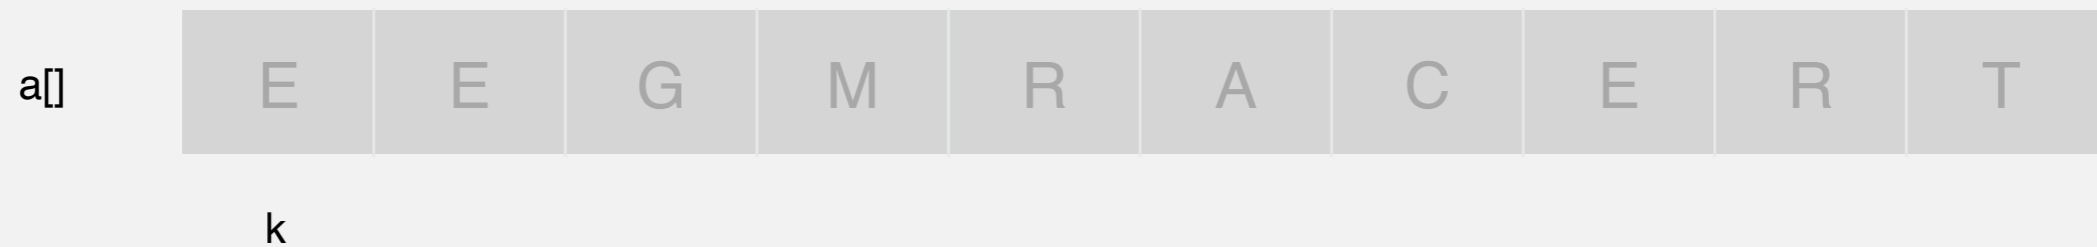


compare minimum in each subarray

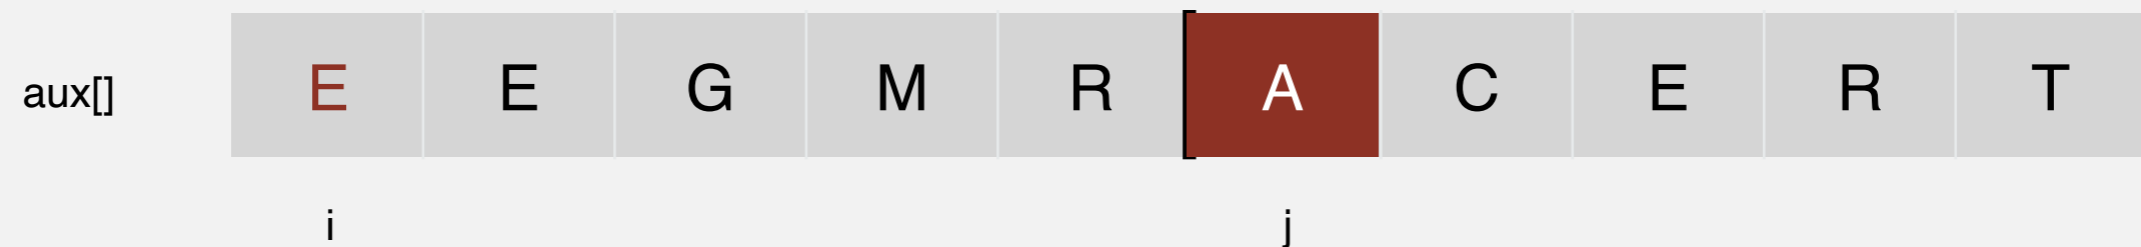

Abstract in-place merge

Goal. Given two sorted subarrays $a[l_0]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[l_0]$ to $a[hi]$.

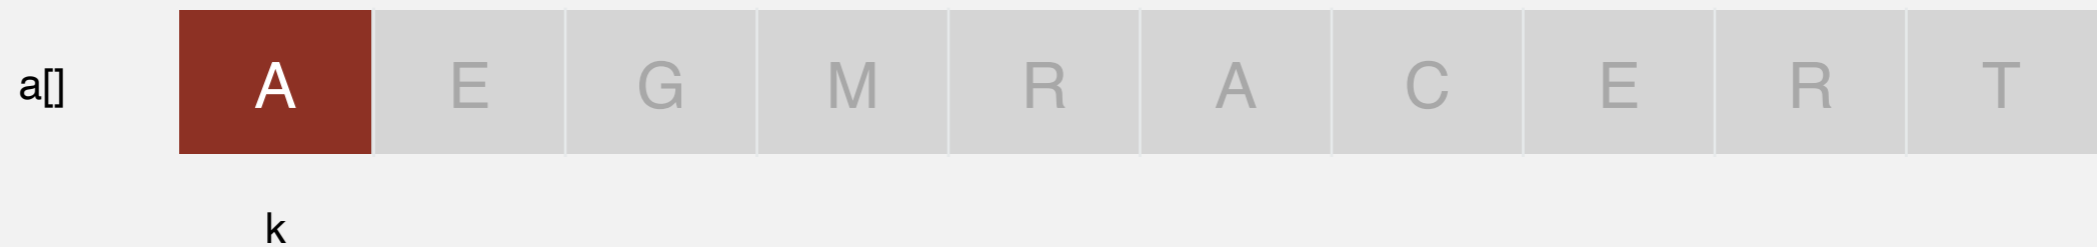


compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

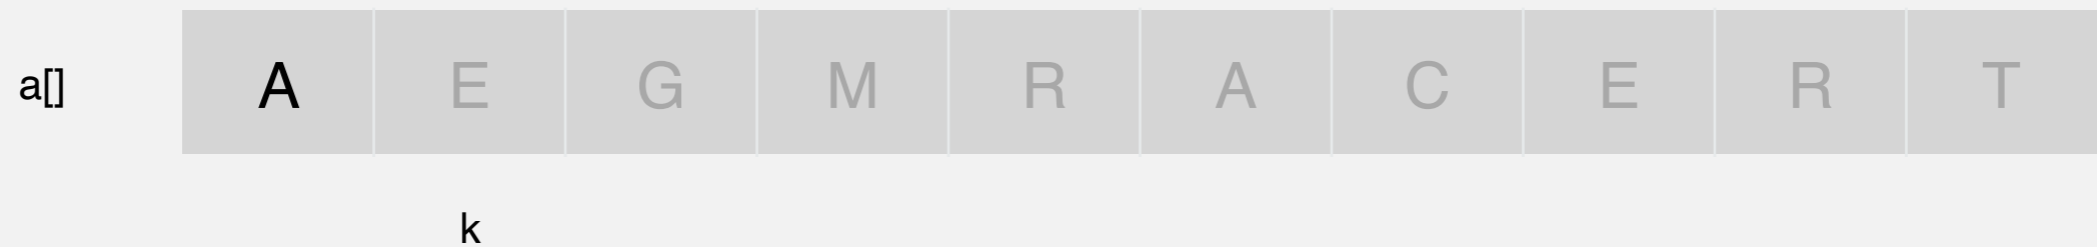


compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

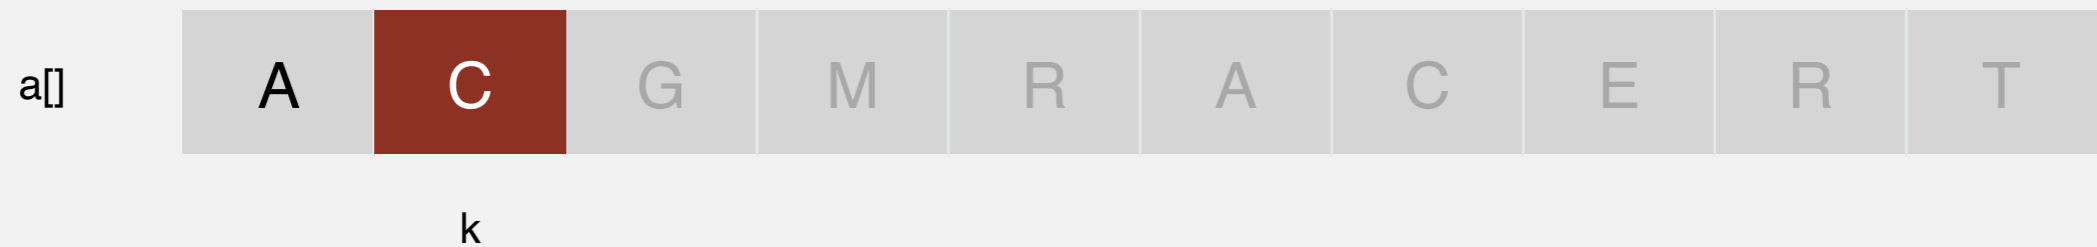


compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

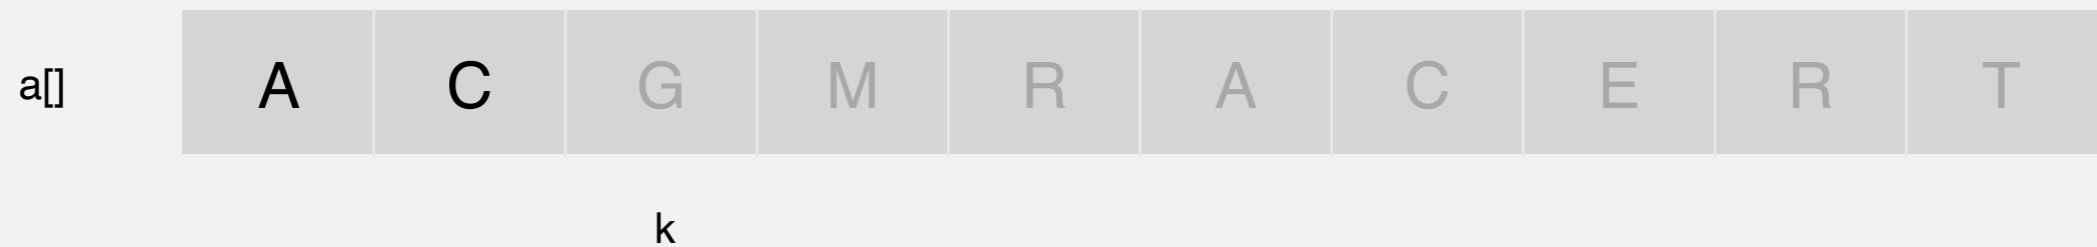


compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

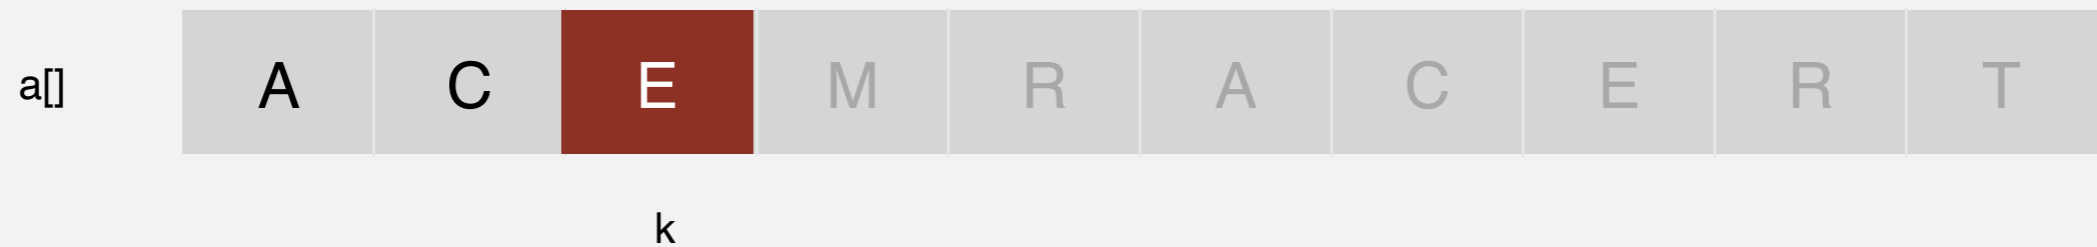


compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

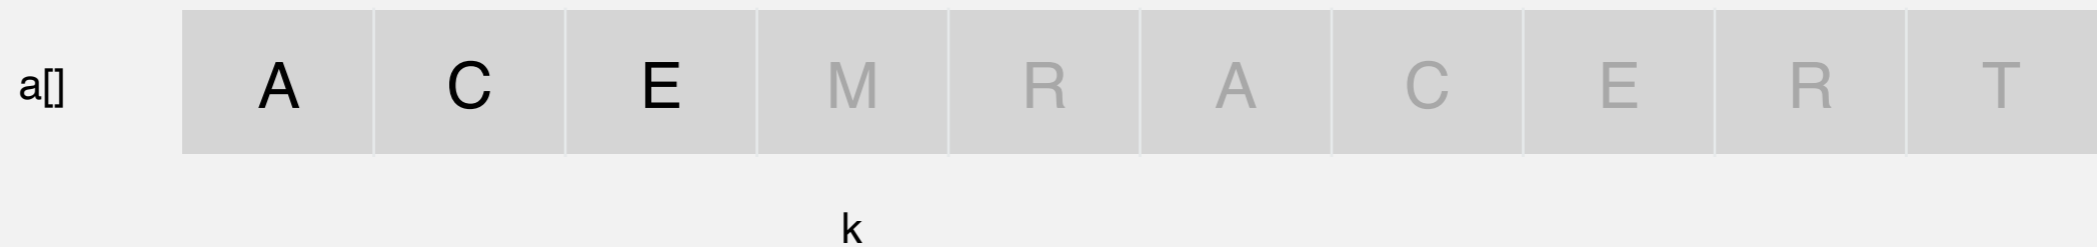


compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

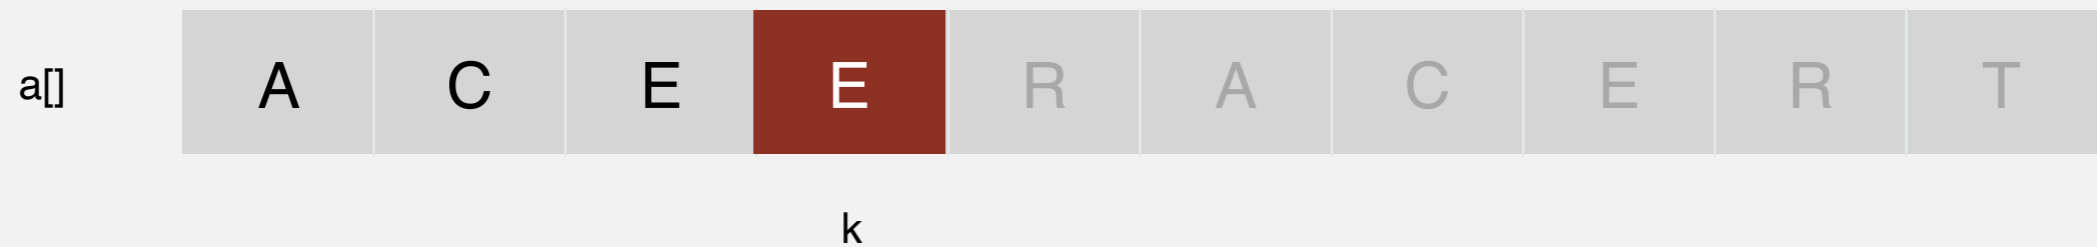


compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[l_0]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[l_0]$ to $a[hi]$.

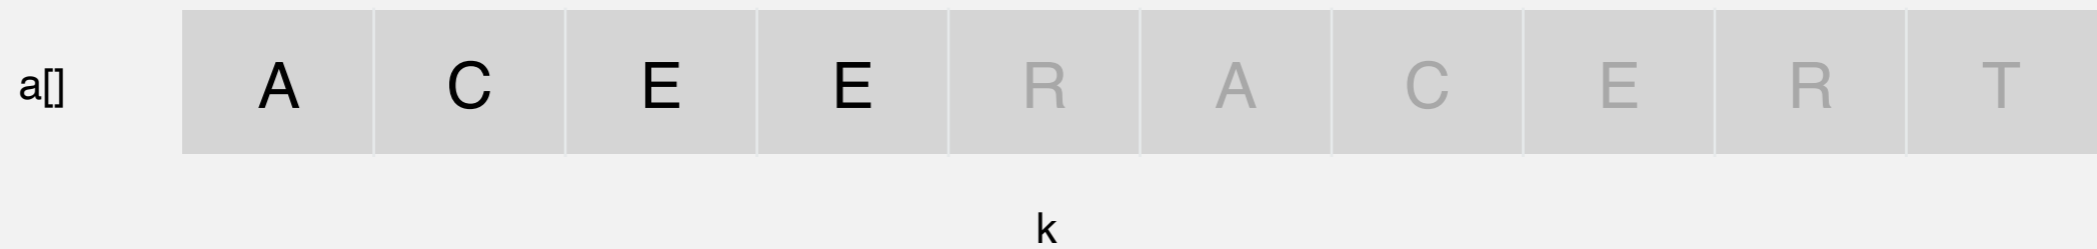


compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

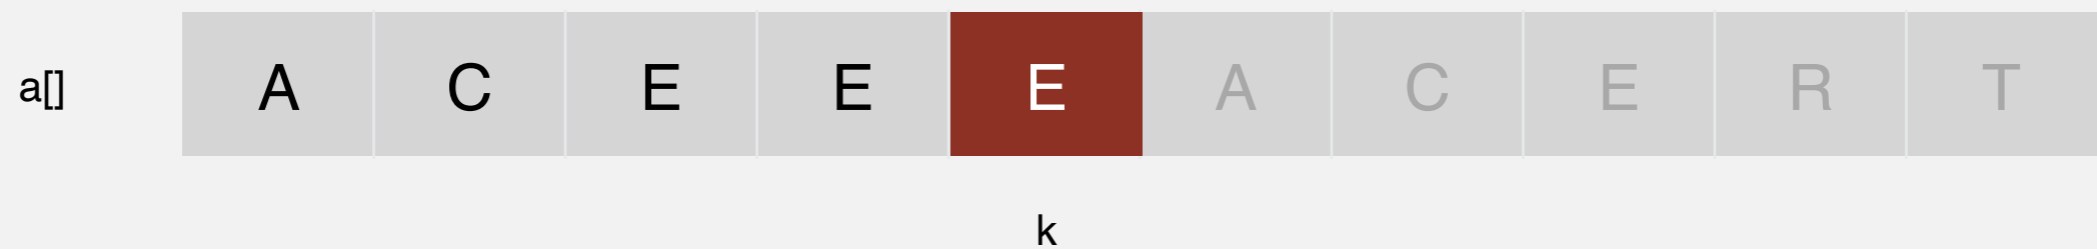

compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[l_0]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[l_0]$ to $a[hi]$.



compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.



compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[l_0]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[l_0]$ to $a[hi]$.



compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.



compare minimum in each subarray



Abstract in-place merge

Goal. Given two sorted subarrays $a[l_0]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[l_0]$ to $a[hi]$.



compare minimum in each subarray




Abstract in-place merge

Goal. Given two sorted subarrays $a[l_0]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[l_0]$ to $a[hi]$.



compare minimum in each subarray

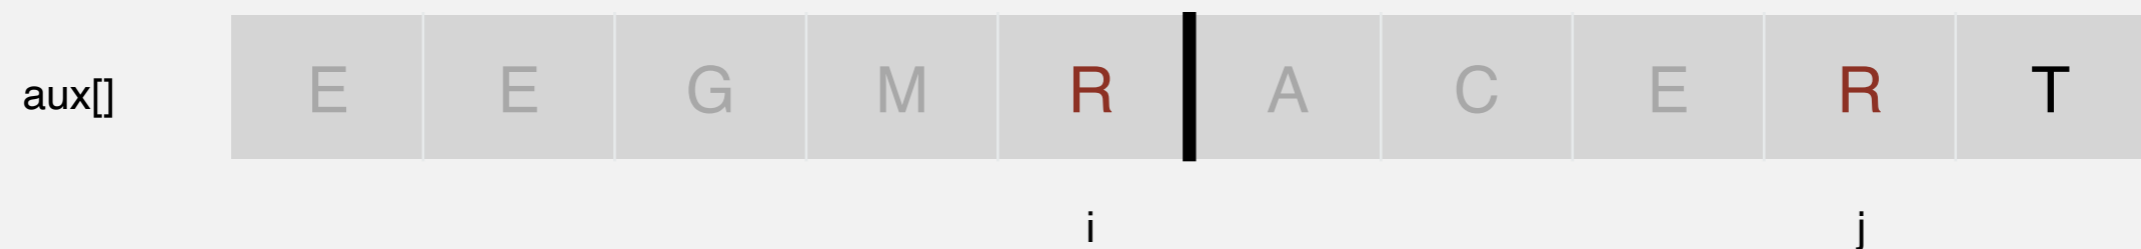

Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.



one subarray exhausted, take from other



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.



one subarray exhausted, take from other



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.



one subarray exhausted, take from other



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.




one subarray exhausted, take from other



Abstract in-place merge

Goal. Given two sorted subarrays $a[l_0]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[l_0]$ to $a[hi]$.

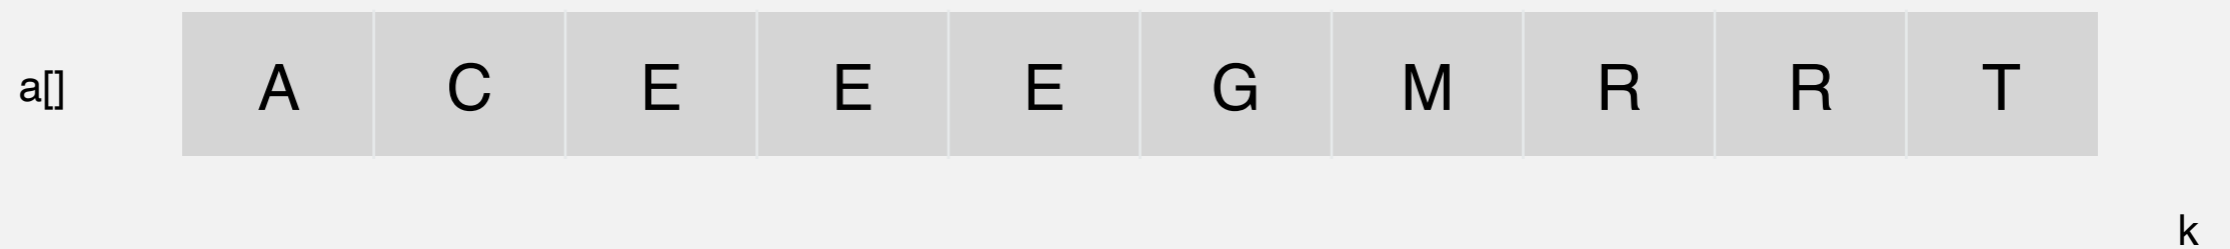


both subarrays exhausted, done



Abstract in-place merge

Goal. Given two sorted subarrays $a[lo]$ to $a[mid]$ and $a[mid+1]$ to $a[hi]$, replace with sorted subarray $a[lo]$ to $a[hi]$.

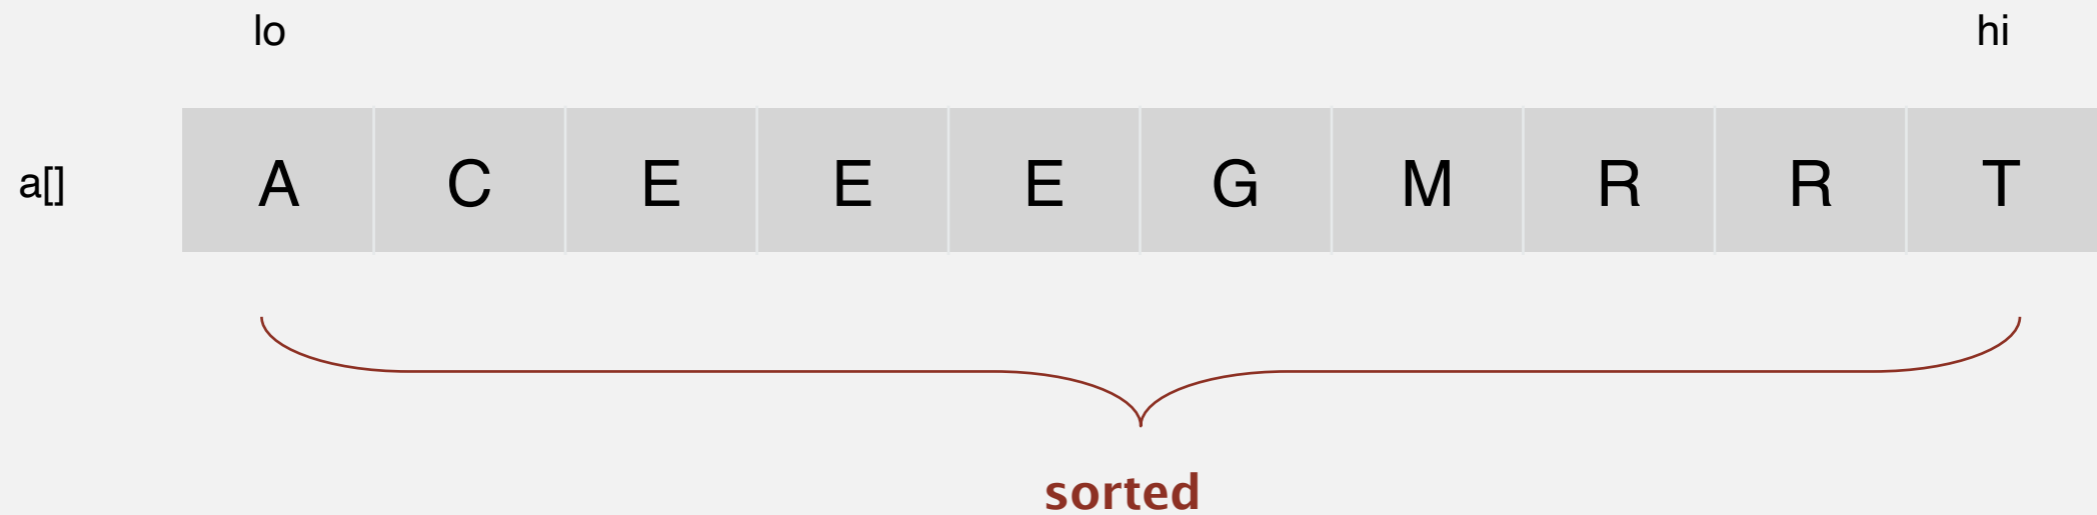

Merging

Q. How to combine two sorted subarrays into a sorted whole.

A. Use an auxiliary array.

		a[]										i	j	aux[]									
		0	1	2	3	4	5	6	7	8	9			0	1	2	3	4	5	6	7	8	9
input	k	E	E	G	M	R	A	C	E	R	T			-	-	-	-	-	-	-	-	-	-
	copy	E	E	G	M	R	A	C	E	R	T			E	E	G	M	R	A	C	E	R	T
												0	5										
	0	A										0	6	E	E	G	M	R	A	C	E	R	T
	1	A	C									0	7	E	E	G	M	R		C	E	R	T
	2	A	C	E								1	7	E	E	G	M	R			E	R	T
	3	A	C	E	E							2	7		E	G	M	R			E	R	T
	4	A	C	E	E	E						2	8			G	M	R			E	R	T
	5	A	C	E	E	E	G					3	8			G	M	R				R	T
	6	A	C	E	E	E	G	M				4	8				M	R				R	T
	7	A	C	E	E	E	G	M	R			5	8					R				R	T
	8	A	C	E	E	E	G	M	R	R		5	9									R	T
	9	A	C	E	E	E	G	M	R	R	T	6	10										T
merged result		A	C	E	E	E	G	M	R	R	T												

Abstract in-place merge trace


Merging: Java implementation

```
private static void merge(Comparable[] a, Comparable[] aux, int lo, int mid, int hi)
{
    assert isSorted(a, lo, mid);    // precondition: a[lo..mid]    sorted
    assert isSorted(a, mid+1, hi);  // precondition: a[mid+1..hi] sorted

    for (int k = lo; k <= hi; k++)
        aux[k] = a[k];                copy

    int i = lo, j = mid+1;
    for (int k = lo; k <= hi; k++)
    {
        if      (i > mid)           a[k] = aux[j++];
        else if (j > hi)           a[k] = aux[i++];
        else if (less(aux[j], aux[i])) a[k] = aux[j++];
        else                       a[k] = aux[i++];
    }

    assert isSorted(a, lo, hi);    // postcondition: a[lo..hi] sorted
}
```

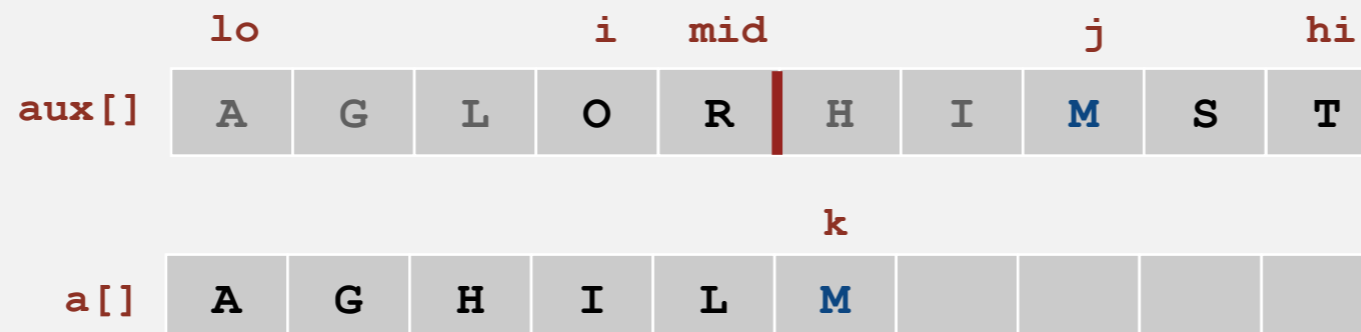

Assertions

Assertion. Statement to test assumptions about your program.

- Helps detect logic bugs.
- Documents code.

Java assert statement. Throws an exception unless boolean condition is true.

```
assert isSorted(a, lo, hi);
```

Can enable or disable at runtime. \Rightarrow No cost in production code.

```
java -ea MyProgram // enable assertions  
java -da MyProgram // disable assertions (default)
```


Best practices. Use to check internal invariants. Assume assertions will be disabled in production code (so do not use for external argument-checking).

Mergesort: Java implementation

```
public class Merge
{
    private static void merge(Comparable[] a, Comparable[] aux, int lo, int mid, int hi)
    { /* as before */ }

    private static void sort(Comparable[] a, Comparable[] aux, int lo, int hi)
    {
        if (hi <= lo) return;
        int mid = lo + (hi - lo) / 2;
        sort (a, aux, lo, mid);
        sort (a, aux, mid+1, hi);
        merge(a, aux, lo, mid, hi);
    }

    public static void sort(Comparable[] a)
    {
        aux = new Comparable[a.length];
        sort(a, aux, 0, a.length - 1);
    }
}
```

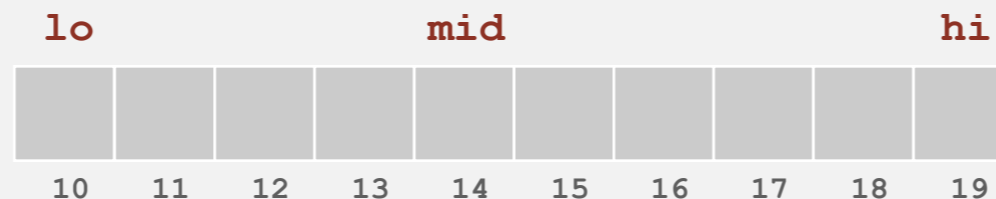

Mergesort: trace


	lo	hi	a[]															
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15		
merge(a, 0, 0, 1)																		
merge(a, 2, 2, 3)																		
merge(a, 0, 1, 3)																		
merge(a, 4, 4, 5)																		
merge(a, 6, 6, 7)																		
merge(a, 4, 5, 7)																		
merge(a, 0, 3, 7)																		
merge(a, 8, 8, 9)																		
merge(a, 10, 10, 11)																		
merge(a, 8, 9, 11)																		
merge(a, 12, 12, 13)																		
merge(a, 14, 14, 15)																		
merge(a, 12, 13, 15)																		
merge(a, 8, 11, 15)																		
merge(a, 0, 7, 15)																		
	M	E	R	G	E	S	O	R	T	E	X	A	M	P	L	E		
	E	M	R	G	E	S	O	R	T	E	X	A	M	P	L	E		
	E	M	G	R	E	S	O	R	T	E	X	A	M	P	L	E		
	E	G	M	R	E	S	O	R	T	E	X	A	M	P	L	E		
	E	G	M	R	E	S	O	R	T	E	X	A	M	P	L	E		
	E	G	M	R	E	S	O	R	T	E	X	A	M	P	L	E		
	E	G	M	R	E	O	R	S	T	E	X	A	M	P	L	E		
	E	E	G	M	O	R	R	S	T	E	X	A	M	P	L	E		
	E	E	G	M	O	R	R	S	E	T	X	A	M	P	L	E		
	E	E	G	M	O	R	R	S	E	T	A	X	M	P	L	E		
	E	E	G	M	O	R	R	S	A	E	T	X	M	P	L	E		
	E	E	G	M	O	R	R	S	A	E	T	X	M	P	L	E		
	E	E	G	M	O	R	R	S	A	E	T	X	M	P	L	E		
	E	E	G	M	O	R	R	S	A	E	E	L	M	P	T	X		
	A	E	E	E	E	G	L	M	M	O	P	R	R	S	T	X		

Trace of merge results for top-down mergesort

result after recursive call

Mergesort: animation

50 random items

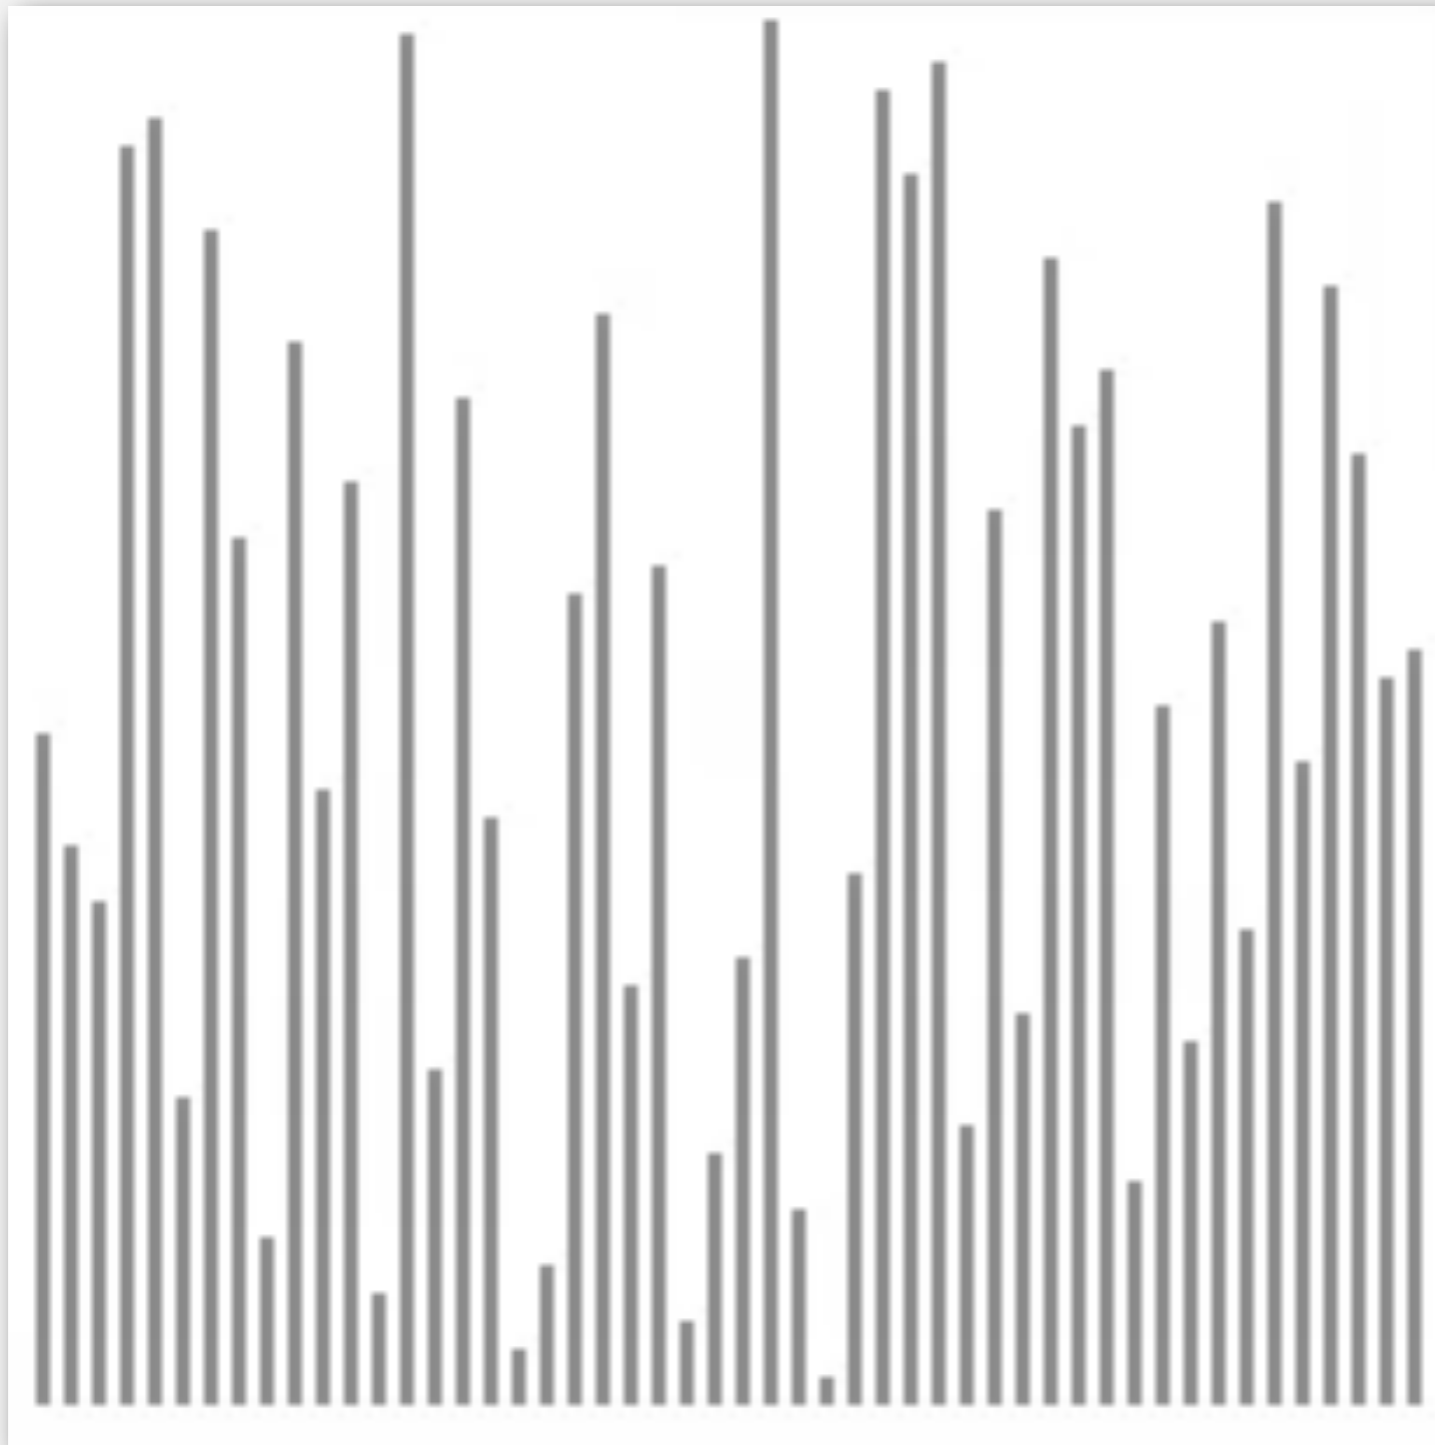


<http://www.sorting-algorithms.com/merge-sort>

- ▲ algorithm position
- █ in order
- █ current subarray
- █ not in order

Mergesort: animation

50 reverse-sorted items

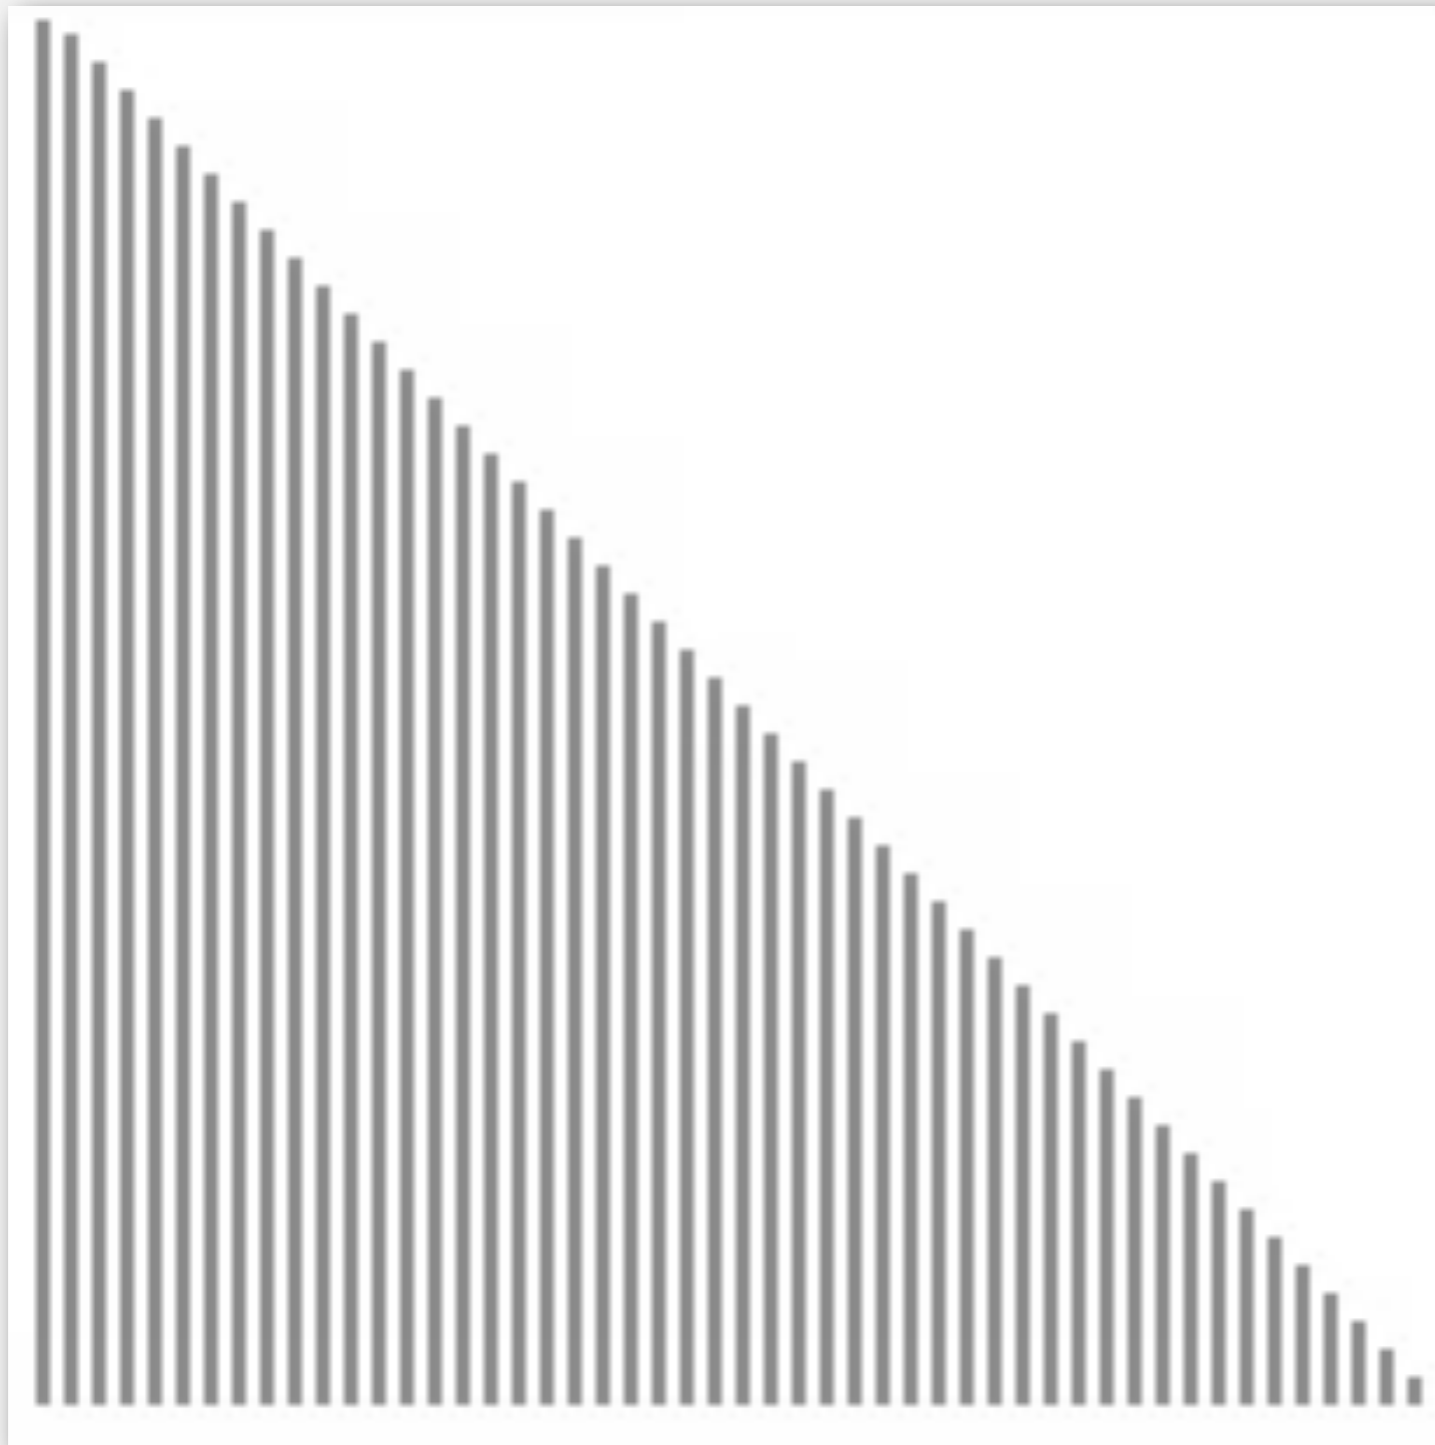

<http://www.sorting-algorithms.com/merge-sort>

- ▲ algorithm position
- █ in order
- █ current subarray
- █ not in order

Mergesort: empirical analysis

Running time estimates:

- Laptop executes 10^8 compares/second.
- Supercomputer executes 10^{12} compares/second.

	insertion sort (N^2)			mergesort ($N \log N$)		
computer	thousand	million	billion	thousand	million	billion
home	instant	2.8 hours	317 years	instant	1 second	18 min
super	instant	1 second	1 week	instant	instant	instant

Bottom line. Good algorithms are better than supercomputers.

Mergesort: number of compares and array accesses

Proposition. Mergesort uses at most $N \lg N$ compares and $6 N \lg N$ array accesses to sort any array of size N .

Pf sketch. The number of compares $C(N)$ and array accesses $A(N)$ to mergesort an array of size N satisfy the recurrences:

$$C(N) \leq C(\lceil N/2 \rceil) + C(\lfloor N/2 \rfloor) + N \quad \text{for } N > 1, \text{ with } C(1) = 0.$$



$$A(N) \leq A(\lceil N/2 \rceil) + A(\lfloor N/2 \rfloor) + 6N \quad \text{for } N > 1, \text{ with } A(1) = 0.$$

We solve the recurrence when N is a power of 2.

$$D(N) = 2 D(N/2) + N, \text{ for } N > 1, \text{ with } D(1) = 0.$$

Merging: Java implementation

```
private static void merge(Comparable[] a, Comparable[] aux, int lo, int mid, int hi)
{
    assert isSorted(a, lo, mid);    // precondition: a[lo..mid] sorted
    assert isSorted(a, mid+1, hi);  // precondition: a[mid+1..hi] sorted

    for (int k = lo; k <= hi; k++)
        aux[k] = a[k];                ← 2N                                copy

    int i = lo, j = mid+1;
    for (int k = lo; k <= hi; k++)
    {
        if (i > mid)                a[k] = aux[j++];
        else if (j > hi)            a[k] = aux[i++];
        else if (less(aux[j], aux[i])) a[k] = aux[j++];
        else                        a[k] = aux[i++];                ← 2N
    }


    assert isSorted(a, lo, hi);    // postcondition: a[lo..hi] sorted
}
```

Proof: Each merge uses at most $6N$ array accesses ($2N$ for the copy, $2N$ for the move back, and at most $2N$ for compares). The result follows from the same argument as for PROPOSITION F.

Divide-and-conquer recurrence: proof by picture

Proposition. If $D(N)$ satisfies $D(N) = 2D(N/2) + N$ for $N > 1$, with $D(1) = 0$, then $D(N) = N \lg N$.

Pf I. [assuming N is a power of 2]

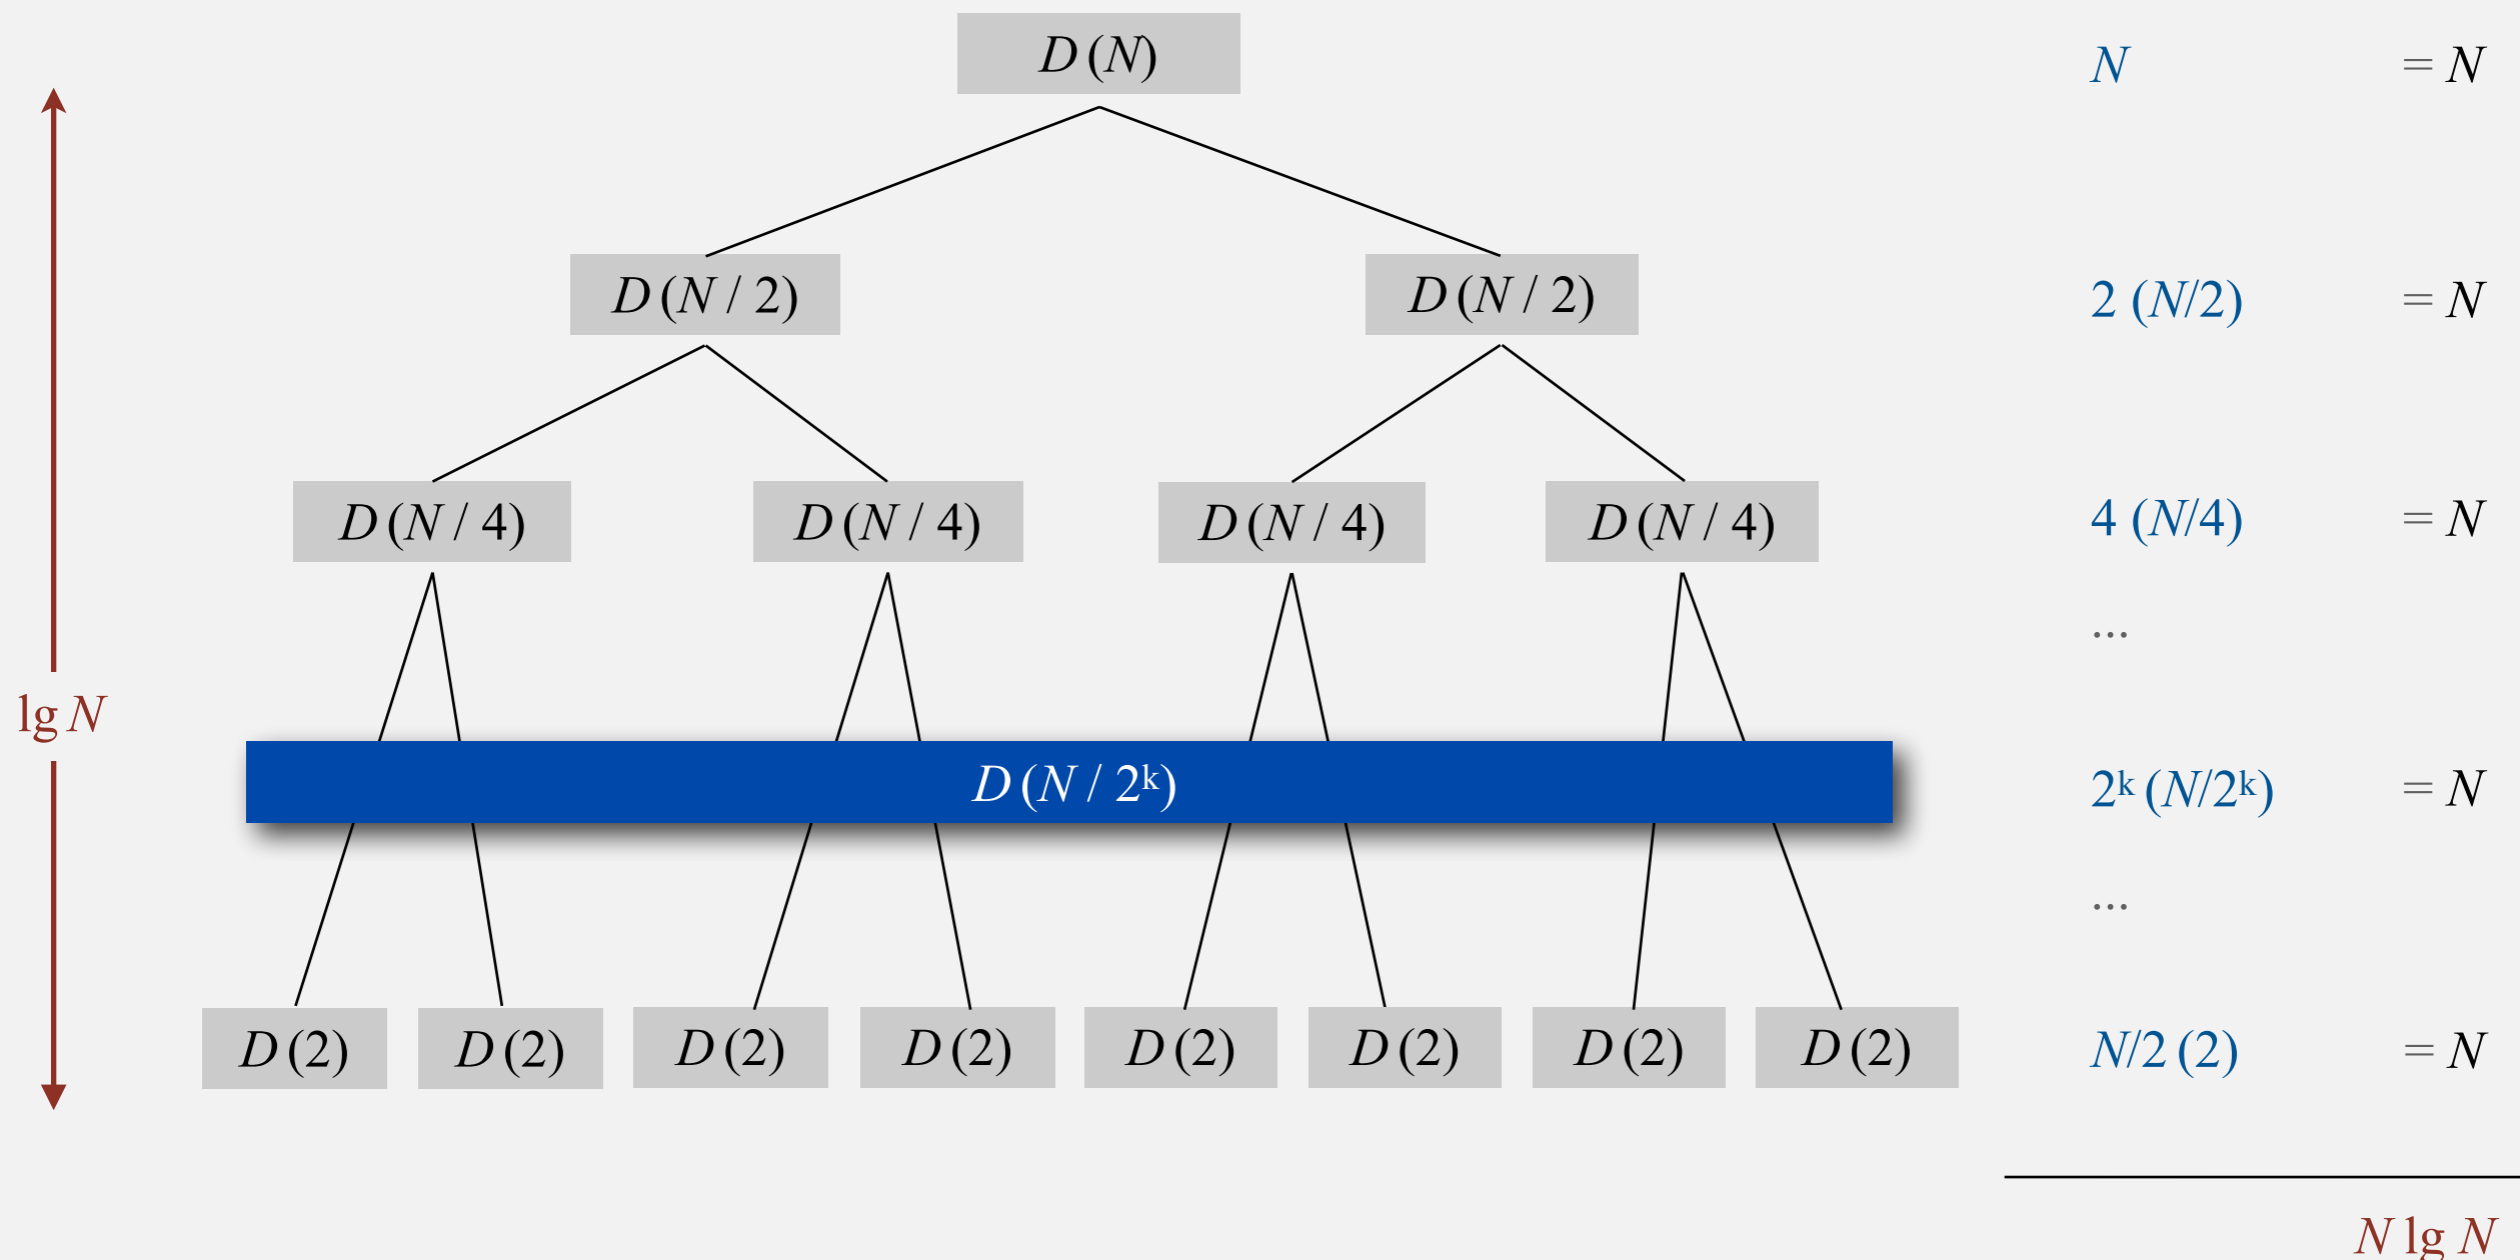

Divide-and-conquer recurrence: proof by expansion

Proposition. If $D(N)$ satisfies $D(N) = 2D(N/2) + N$ for $N > 1$, with $D(1) = 0$, then $D(N) = N \lg N$.

Pf 2. [assuming N is a power of 2]

$$D(N) = 2D(N/2) + N$$

$$D(N)/N = 2D(N/2)/N + 1$$

$$= D(N/2)/(N/2) + 1$$

$$= D(N/4)/(N/4) + 1 + 1$$

$$= D(N/8)/(N/8) + 1 + 1 + 1$$

...

$$= D(N/N)/(N/N) + 1 + 1 + \dots + 1$$

$$= \lg N$$

given

divide both sides by N

algebra

apply to first term

apply to first term again

stop applying, $D(1) = 0$

Divide-and-conquer recurrence: proof by induction

Proposition. If $D(N)$ satisfies $D(N) = 2D(N/2) + N$ for $N > 1$, with $D(1) = 0$, then $D(N) = N \lg N$.

Pf 3. [assuming N is a power of 2]

- Base case: $N = 1$.
- Inductive hypothesis: $D(N) = N \lg N$.
- Goal: show that $D(2N) = (2N) \lg (2N)$.

$$D(2N) = 2D(N) + 2N$$

given

$$= 2N \lg N + 2N$$

inductive hypothesis

$$= 2N (\lg (2N) - 1) + 2N$$

algebra


$$= 2N \lg (2N)$$

QED

Mergesort analysis: memory

Proposition. Mergesort uses extra space proportional to N .

Pf. The array `aux[]` needs to be of size N for the last merge.

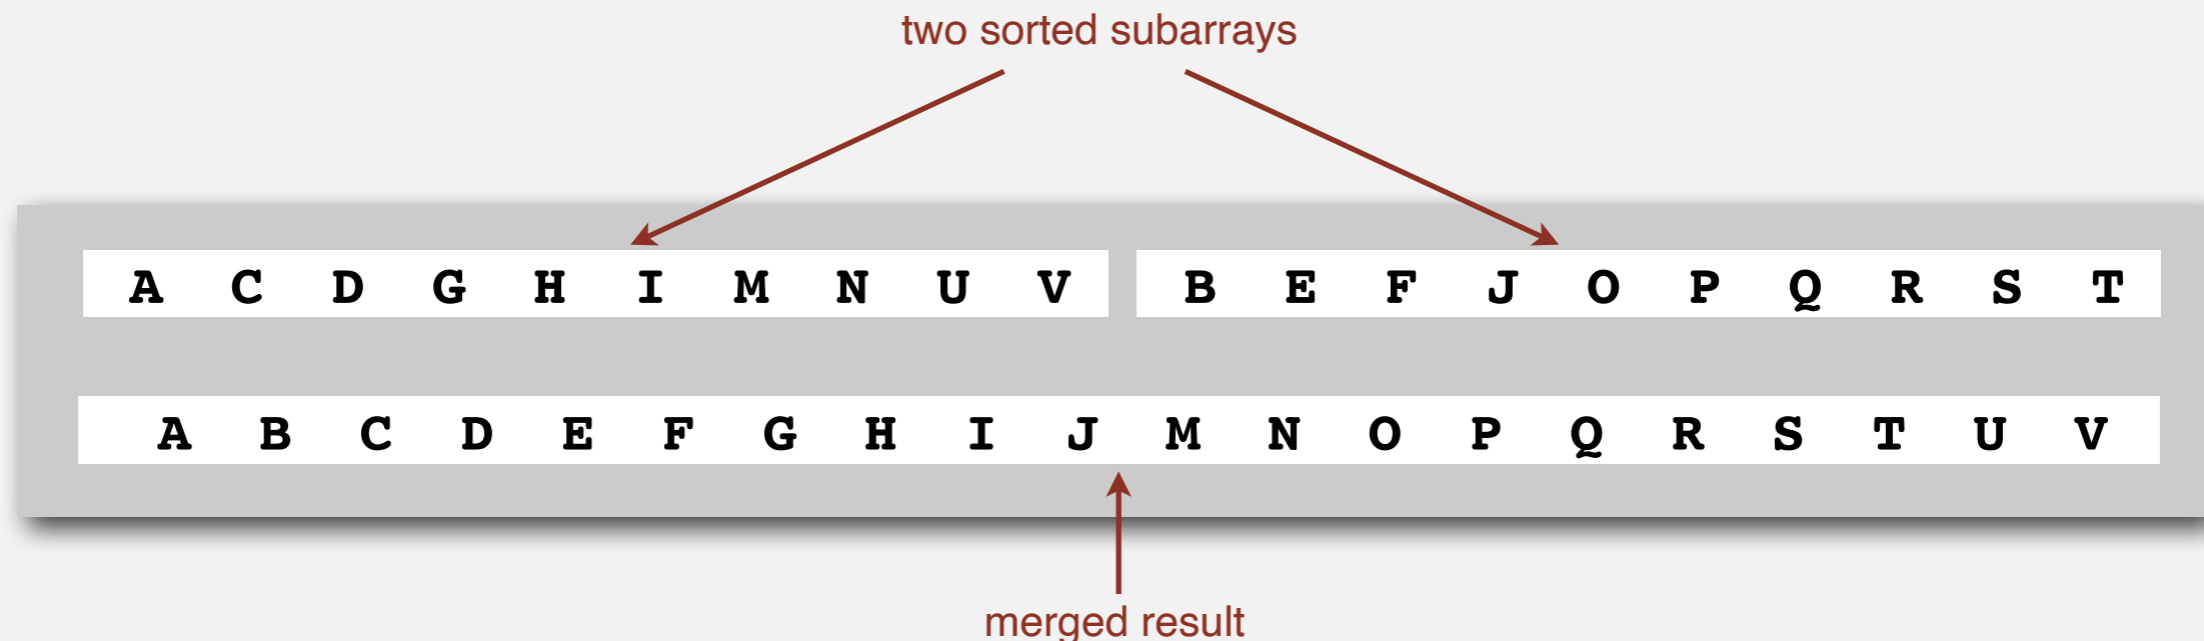

Def. A sorting algorithm is **in-place** if it uses $\leq c \log N$ extra memory.

Ex. Insertion sort, selection sort, shellsort.

Challenge for the bored. In-place merge. [Kronrod, 1969]

Mergesort: practical improvements

Use insertion sort for small subarrays.

- Mergesort has too much overhead for tiny subarrays.
- Cutoff to insertion sort for ≈ 7 items.

```
private static void sort(Comparable[] a, Comparable[] aux, int lo, int hi)
{
    if (hi <= lo + CUTOFF - 1) Insertion.sort(a, lo, hi);
    int mid = lo + (hi - lo) / 2;
    sort (a, aux, lo, mid);
    sort (a, aux, mid+1, hi);
    merge(a, aux, lo, mid, hi);
}
```

Mergesort: practical improvements

Stop if already sorted.

- Is biggest item in first half \leq smallest item in second half?
- Helps for partially-ordered arrays.

A B C D E F G H I **J** **M** N O P Q R S T U V

A B C D E F G H I J M N O P Q R S T U V

```
private static void sort(Comparable[] a, Comparable[] aux, int lo, int hi)
{
    if (hi <= lo) return;
    int mid = lo + (hi - lo) / 2;
    sort (a, aux, lo, mid);
    sort (a, aux, mid+1, hi);
    if (!less(a[mid+1], a[mid])) return;
    merge(a, aux, lo, mid, hi);
}
```

Mergesort: practical improvements

Eliminate the copy to the auxiliary array. Save time (but not space) by switching the role of the input and auxiliary array in each recursive call.


```
private static void merge(Comparable[] a, Comparable[] aux, int lo, int mid, int hi)
{
    int i = lo, j = mid+1;
    for (int k = lo; k <= hi; k++)
    {
        if (i > mid)          aux[k] = a[j++];
        else if (j > hi)     aux[k] = a[i++];
        else if (less(a[j], a[i])) aux[k] = a[j++];
        else                 aux[k] = a[i++];
    }
}

private static void sort(Comparable[] a, Comparable[] aux, int lo, int hi)
{
    if (hi <= lo) return;
    int mid = lo + (hi - lo) / 2;
    sort (aux, a, lo, mid);
    sort (aux, a, mid+1, hi);
    merge(aux, a, lo, mid, hi);
}
```

← merge from a[] to aux[]

↑ switch roles of aux[] and a[]

Mergesort: visualization

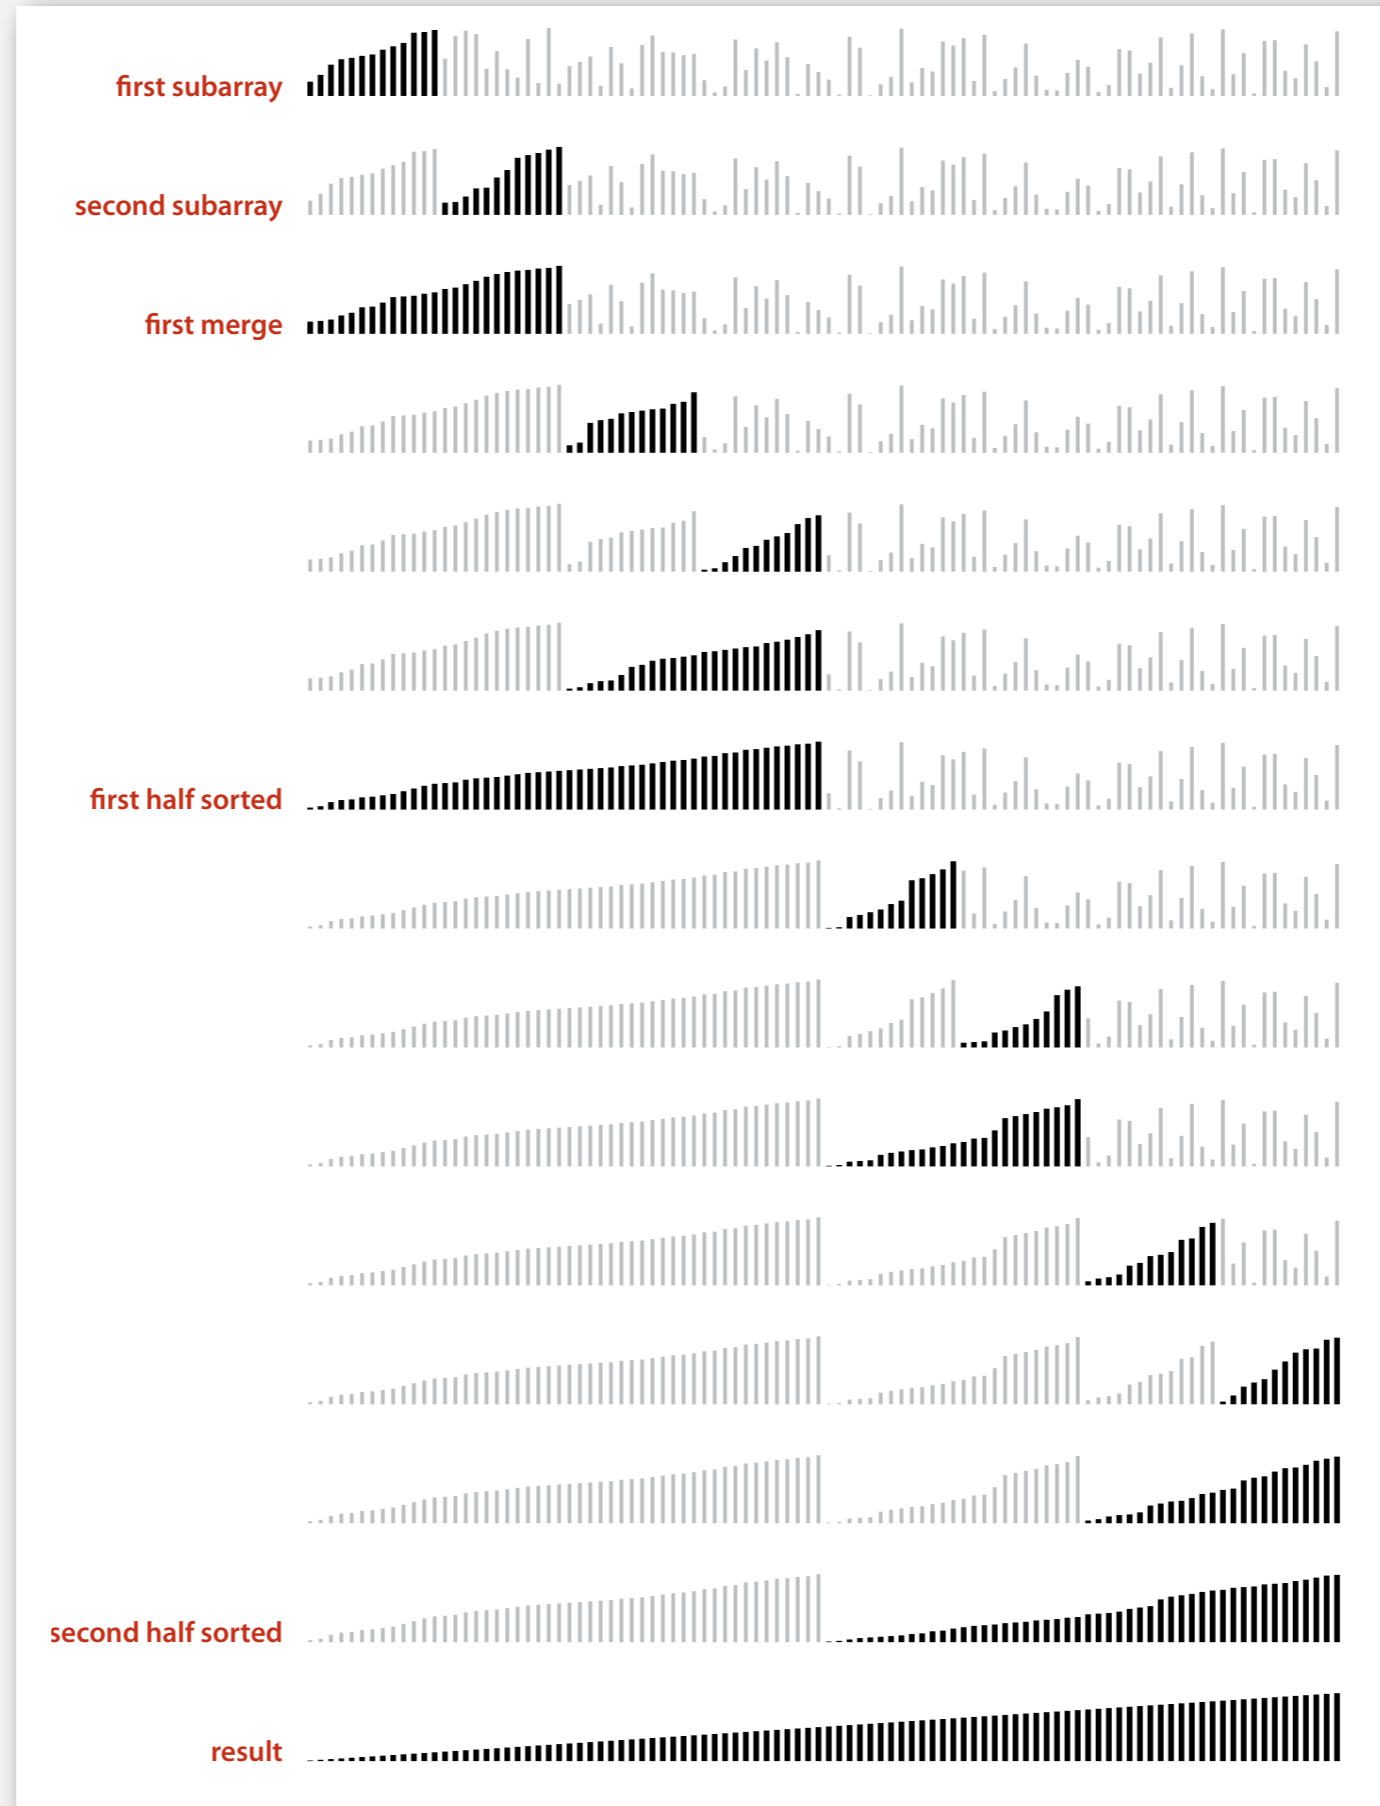

Bottom-up mergesort

Basic plan.

- Pass through array, merging subarrays of size 1.
- Repeat for subarrays of size 2, 4, 8, 16,

	a[i]															
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
sz = 1	M	E	R	G	E	S	O	R	T	E	X	A	M	P	L	E
merge(a, 0, 0, 1)	E	M	R	G	E	S	O	R	T	E	X	A	M	P	L	E
merge(a, 2, 2, 3)	E	M	G	R	E	S	O	R	T	E	X	A	M	P	L	E
merge(a, 4, 4, 5)	E	M	G	R	E	S	O	R	T	E	X	A	M	P	L	E
merge(a, 6, 6, 7)	E	M	G	R	E	S	O	R	T	E	X	A	M	P	L	E
merge(a, 8, 8, 9)	E	M	G	R	E	S	O	R	E	T	X	A	M	P	L	E
merge(a, 10, 10, 11)	E	M	G	R	E	S	O	R	E	T	A	X	M	P	L	E
merge(a, 12, 12, 13)	E	M	G	R	E	S	O	R	E	T	A	X	M	P	L	E
merge(a, 14, 14, 15)	E	M	G	R	E	S	O	R	E	T	A	X	M	P	E	L
sz = 2	E	G	M	R	E	S	O	R	E	T	A	X	M	P	E	L
merge(a, 0, 1, 3)	E	G	M	R	E	S	O	R	E	T	A	X	M	P	E	L
merge(a, 4, 5, 7)	E	G	M	R	E	O	R	S	E	T	A	X	M	P	E	L
merge(a, 8, 9, 11)	E	G	M	R	E	O	R	S	A	E	T	X	M	P	E	L
merge(a, 12, 13, 15)	E	G	M	R	E	O	R	S	A	E	T	X	E	L	M	P
sz = 4	E	E	G	M	O	R	R	S	A	E	T	X	E	L	M	P
merge(a, 0, 3, 7)	E	E	G	M	O	R	R	S	A	E	T	X	E	L	M	P
merge(a, 8, 11, 15)	E	E	G	M	O	R	R	S	A	E	E	L	M	P	T	X
sz = 8	A	E	E	E	E	G	L	M	M	O	P	R	R	S	T	X
merge(a, 0, 7, 15)	A	E	E	E	E	G	L	M	M	O	P	R	R	S	T	X

Bottom line. No recursion needed!

Bottom-up mergesort: Java implementation


```
public class MergeBU
{
    private static Comparable[] aux;

    private static void merge(Comparable[] a, int lo, int mid, int hi)
    { /* as before */ }


    public static void sort(Comparable[] a)
    {
        int N = a.length;
        aux = new Comparable[N];
        for (int sz = 1; sz < N; sz = sz+sz)
            for (int lo = 0; lo < N-sz; lo += sz+sz)
                merge(a, lo, lo+sz-1, Math.min(lo+sz+sz-1, N-1));
    }
}
```

Bottom line. Concise industrial-strength code, if you have the space.

Bottom-up mergesort: visual trace

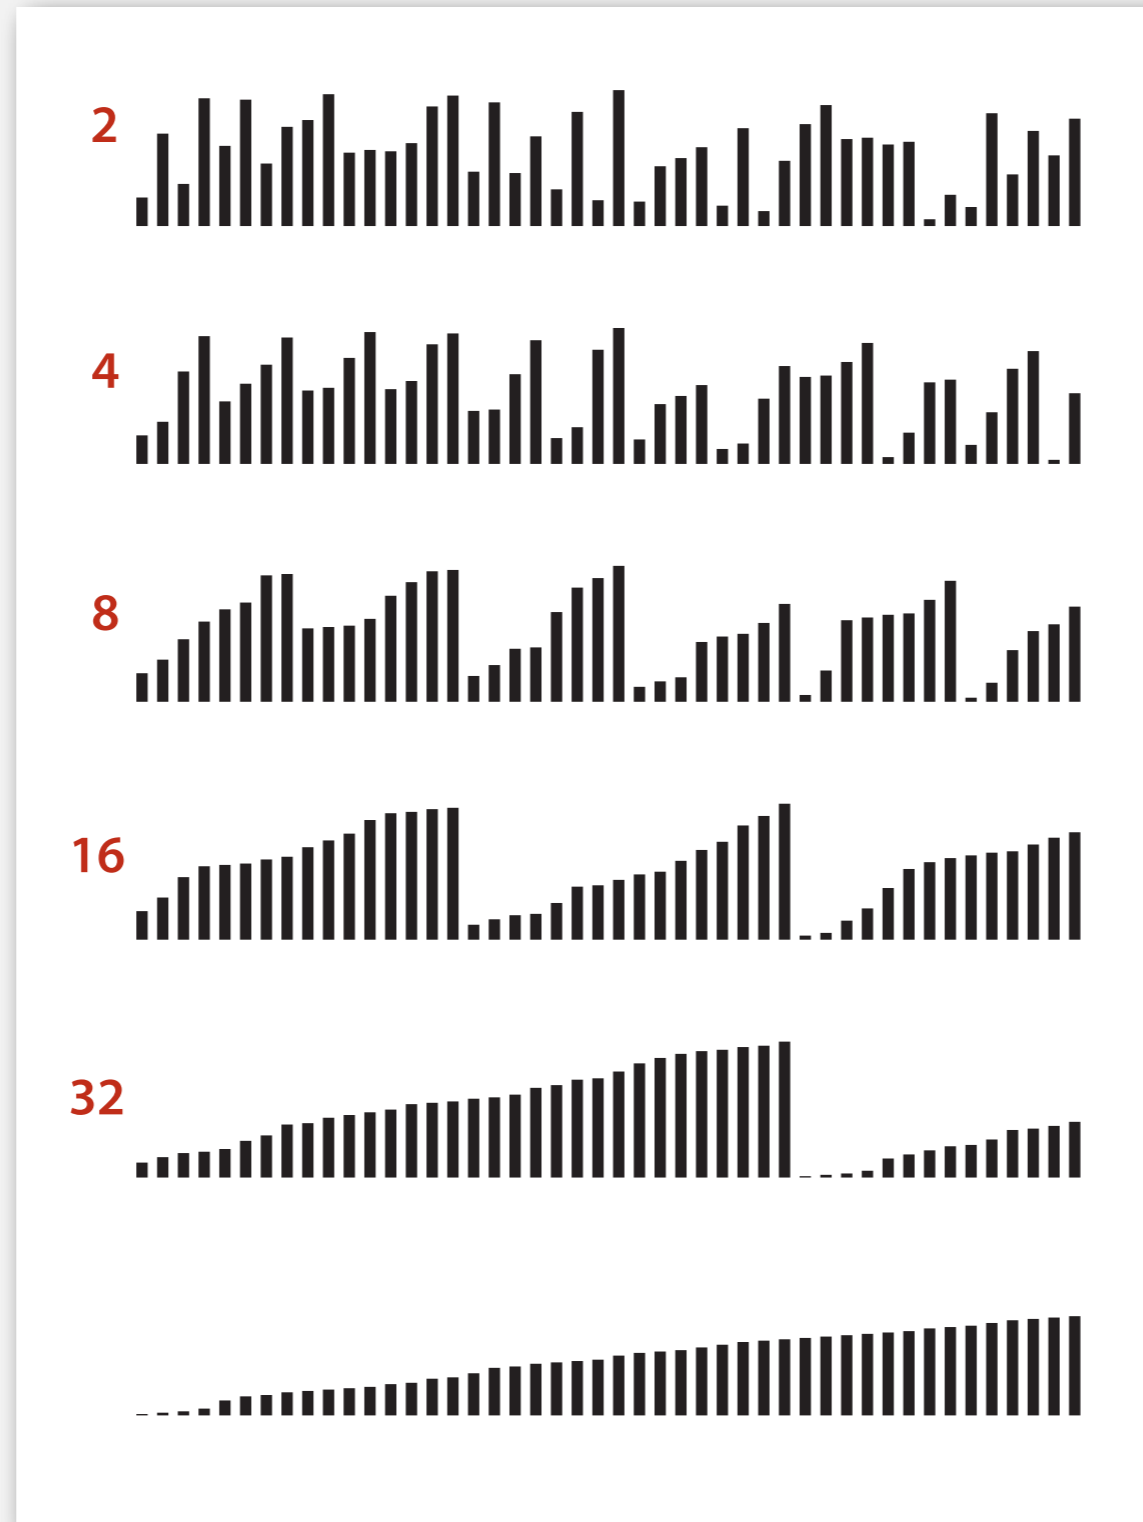

Bottom-up mergesort: visual trace

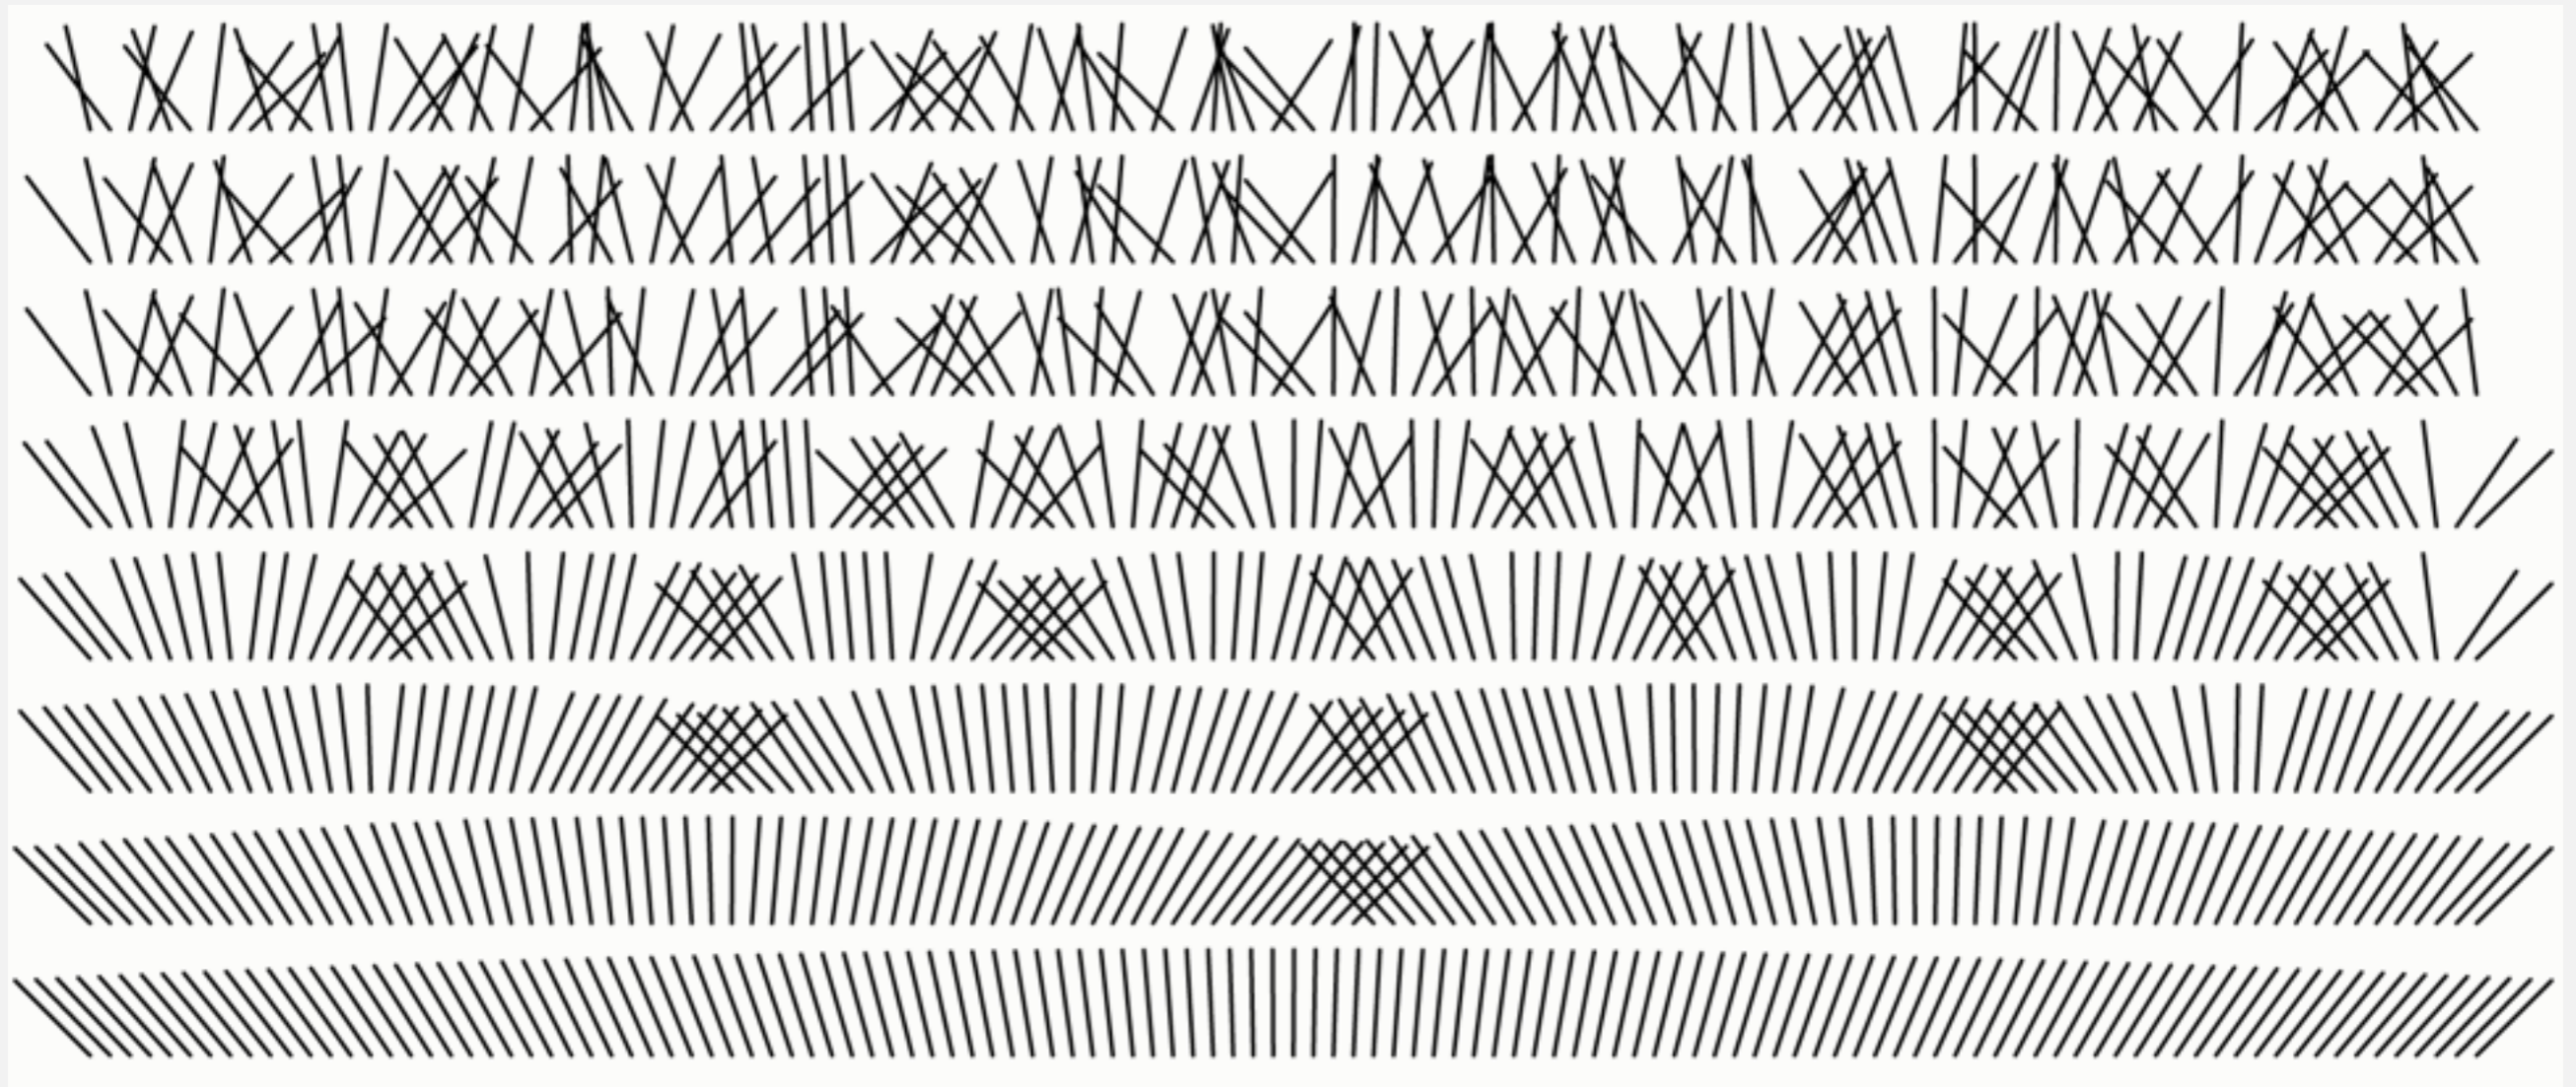

<http://bl.ocks.org/mbostock/39566aca95eb03ddd526>

Complexity of sorting

Computational complexity. Framework to study efficiency of algorithms for solving a particular problem X .

Model of computation. Allowable operations.

Cost model. Operation count(s).

Upper bound. Cost guarantee provided by **some** algorithm for X .

Lower bound. Proven limit on cost guarantee of **all** algorithms for X .

Optimal algorithm. Algorithm with best possible cost guarantee for X .

Example: sorting.

- Model of computation: decision tree.
- Cost model: # compares.
- Upper bound: $\sim N \lg N$ from mergesort.
- Lower bound: ?
- Optimal algorithm: ?


lower bound \sim upper bound

can access information

only through compares

(e.g., Java Comparable framework)

Decision tree (for 3 distinct items a, b, and c)

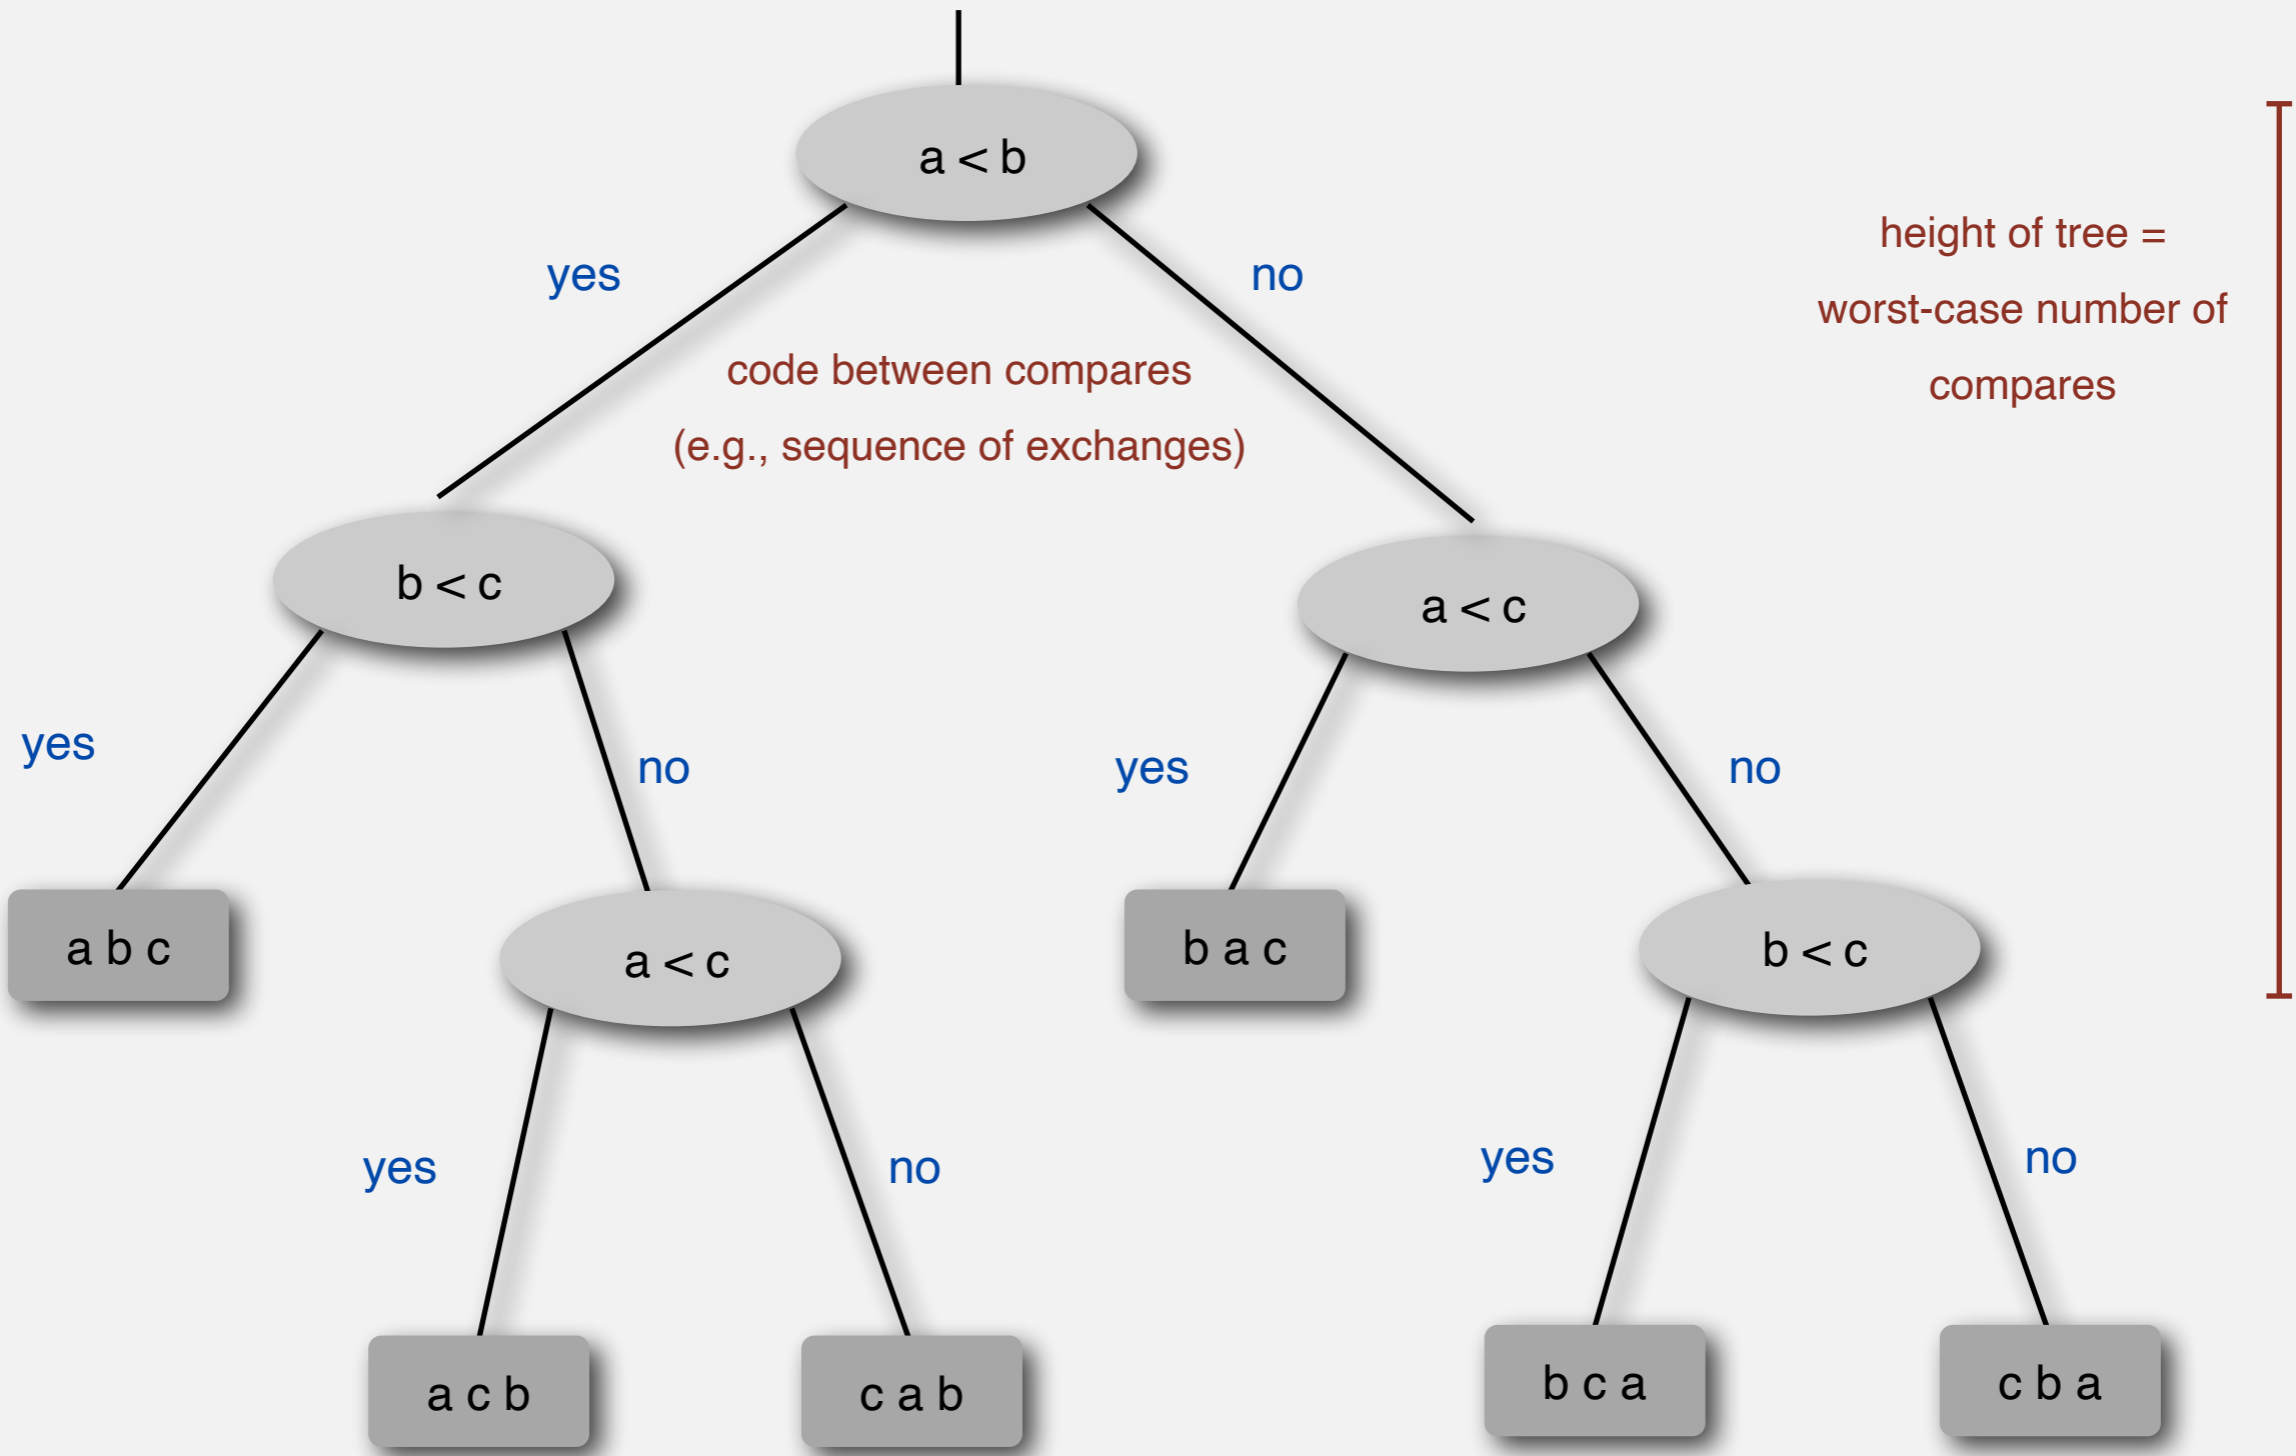


(at least) one leaf for each possible ordering

Compare-based lower bound for sorting

Proposition. Any compare-based sorting algorithm must use at least $\lg(N!) \sim N \lg N$ compares in the worst-case.

Pf.

- Assume array consists of N distinct values a_1 through a_N .
- Worst case dictated by **height** h of decision tree.
- Binary tree of height h has at most 2^h leaves.
- $N!$ different orderings \Rightarrow at least $N!$ leaves.

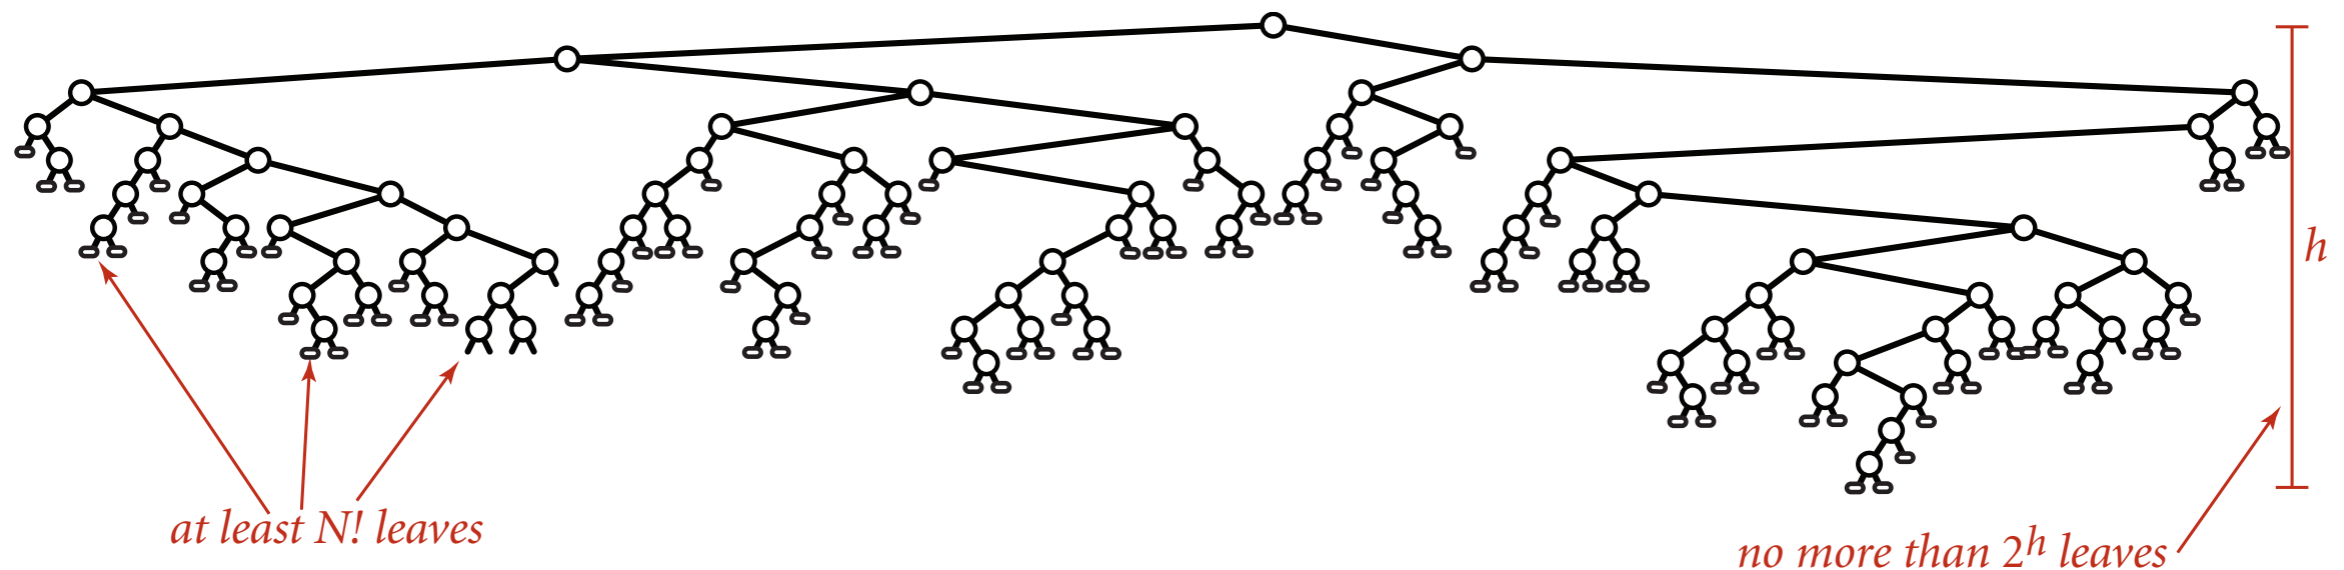

Compare-based lower bound for sorting

Proposition. Any compare-based sorting algorithm must use at least $\lg(N!) \sim N \lg N$ compares in the worst-case.

Pf.

- Assume array consists of N distinct values a_1 through a_N .
- Worst case dictated by **height** h of decision tree.
- Binary tree of height h has at most 2^h leaves.
- $N!$ different orderings \Rightarrow at least $N!$ leaves.

$$2^h \geq \# \text{ leaves} \geq N!$$

$$\Rightarrow h \geq \lg(N!) \sim N \lg N$$

↑
Stirling's formula

Complexity of sorting

Model of computation. Allowable operations.

Cost model. Operation count(s).

Upper bound. Cost guarantee provided by some algorithm for X .

Lower bound. Proven limit on cost guarantee of all algorithms for X .

Optimal algorithm. Algorithm with best possible cost guarantee for X .

Example: sorting.

- Model of computation: decision tree.
- Cost model: # compares.
- Upper bound: $\sim N \lg N$ from mergesort.
- Lower bound: $\sim N \lg N$.
- **Optimal algorithm = mergesort.**

First goal of algorithm design: optimal algorithms.

Complexity results in context

Other operations? Mergesort is optimal with respect to number of compares (e.g., but not with respect to number of array accesses).

Space?

- Mergesort is **not optimal** with respect to space usage.
- Insertion sort, selection sort, and shellsort are space-optimal.

Challenge. Find an algorithm that is both time- and space-optimal.

[stay tuned]

Lessons. Use theory as a guide.

Ex. Don't try to design sorting algorithm that guarantees $\frac{1}{2} N \lg N$ compares.

Complexity results in context (continued)

Lower bound may not hold if the algorithm has information about:

- The initial order of the input.
- The distribution of key values.
- The representation of the keys.

Partially-ordered arrays. Depending on the initial order of the input, we may not need $N \lg N$ compares.

insertion sort requires only $N-1$ compares if input array is sorted

Duplicate keys. Depending on the input distribution of duplicates, we may not need $N \lg N$ compares.

stay tuned for 3-way quicksort

Digital properties of keys. We can use digit/character compares instead of key compares for numbers and strings.

stay tuned for radix sorts

Comparable interface: review

Comparable interface: sort using a type's **natural order**.

```
public class Date implements Comparable<Date>
{
    private final int month, day, year;

    public Date(int m, int d, int y)
    {
        month = m;
        day    = d;
        year   = y;
    }
    ...
    public int compareTo(Date that)
    {
        if (this.year < that.year ) return -1;
        if (this.year > that.year ) return +1;
        if (this.month < that.month) return -1;
        if (this.month > that.month) return +1;
        if (this.day < that.day ) return -1;
        if (this.day > that.day ) return +1;
        return 0;
    }
}
```

natural order



Comparator interface

Comparator interface: sort using an **alternate order**.

```
public interface Comparator<Key>
```

```
    int compare(Key v, Key w)           compare keys v and w
```

Required property. Must be a **total order**.

Ex. Sort strings by:

- Natural order.
- Case insensitive.
- Spanish.
- British phone book.
- ...

Now is the time

is Now the time

café cafetero cuarto **ch**urro nube **ñ**oño

Mckinley **M**ackintosh

pre-1994 order for
digraphs ch and ll and rr



Comparator interface: system sort

To use with Java system sort:

- Create Comparator object.
- Pass as second argument to `Arrays.sort()`.

```
String[] a;
...
Arrays.sort(a);
...
Arrays.sort(a, String.CASE_INSENSITIVE_ORDER);
...
Arrays.sort(a, Collator.getInstance(new Locale("es")));
...
Arrays.sort(a, new BritishPhoneBookOrder());
...
```

uses natural order

uses alternate order defined by
Comparator<String> object

Bottom line. Decouples the definition of the data type from the definition of what it means to compare two objects of that type.

Comparator interface: using with our sorting libraries

To support comparators in our sort implementations:

- Use `Object` instead of `Comparable`.
- Pass `Comparator` to `sort()` and `less()` and use it in `less()`.

insertion sort using a `Comparator`

```
public static void sort(Object[] a, Comparator comparator)
{
    int N = a.length;
    for (int i = 0; i < N; i++)
        for (int j = i; j > 0 && less(comparator, a[j], a[j-1]); j--)
            exch(a, j, j-1);
}

private static boolean less(Comparator c, Object v, Object w)
{ return c.compare(v, w) < 0; }

private static void exch(Object[] a, int i, int j)
{ Object swap = a[i]; a[i] = a[j]; a[j] = swap; }
```

Comparator interface: implementing

To implement a comparator:

- Define a (nested) class that implements the `Comparator` interface.
- Implement the `compare()` method.

```
public class Student
{
    public static final Comparator<Student> BY_NAME = new ByName();
    public static final Comparator<Student> BY_SECTION = new BySection();
    private final String name;
    private final int section;
    ...

    private static class ByName implements Comparator<Student>
    {
        public int compare(Student v, Student w)
        { return v.name.compareTo(w.name); }
    }

    private static class BySection implements Comparator<Student>
    {
        public int compare(Student v, Student w)
        { return v.section - w.section; }
    }
}
```

one Comparator for the class

this technique works here since no danger of overflow

Comparator interface: implementing

To implement a comparator:

- Define a (nested) class that implements the `Comparator` interface.
- Implement the `compare()` method.

```
Arrays.sort(a, Student.BY_NAME);
```

Andrews	3	A	664-480-0023	097 Little
Battle	4	C	874-088-1212	121 Whitman
Chen	3	A	991-878-4944	308 Blair
Fox	3	A	884-232-5341	11 Dickinson
Furia	1	A	766-093-9873	101 Brown
Gazsi	4	B	766-093-9873	101 Brown
Kanaga	3	B	898-122-9643	22 Brown
Rohde	2	A	232-343-5555	343 Forbes

```
Arrays.sort(a, Student.BY_SECTION);
```

Furia	1	A	766-093-9873	101 Brown
Rohde	2	A	232-343-5555	343 Forbes
Andrews	3	A	664-480-0023	097 Little
Chen	3	A	991-878-4944	308 Blair
Fox	3	A	884-232-5341	11 Dickinson
Kanaga	3	B	898-122-9643	22 Brown
Battle	4	C	874-088-1212	121 Whitman
Gazsi	4	B	766-093-9873	101 Brown

A typical application. First, sort by name; **then** sort by section.

```
Selection.sort(a, Student.BY_NAME);
```

Andrews	3	A	664-480-0023	097 Little
Battle	4	C	874-088-1212	121 Whitman
Chen	3	A	991-878-4944	308 Blair
Fox	3	A	884-232-5341	11 Dickinson
Furia	1	A	766-093-9873	101 Brown
Gazsi	4	B	766-093-9873	101 Brown
Kanaga	3	B	898-122-9643	22 Brown
Rohde	2	A	232-343-5555	343 Forbes

```
Selection.sort(a, Student.BY_SECTION);
```

Furia	1	A	766-093-9873	101 Brown
Rohde	2	A	232-343-5555	343 Forbes
Chen	3	A	991-878-4944	308 Blair
Fox	3	A	884-232-5341	11 Dickinson
Andrews	3	A	664-480-0023	097 Little
Kanaga	3	B	898-122-9643	22 Brown
Gazsi	4	B	766-093-9873	101 Brown
Battle	4	C	874-088-1212	121 Whitman

@#%&@! Students in section 3 no longer sorted by name.

A **stable** sort preserves the relative order of items with equal keys.

Stability

Q. Which sorts are stable?

A. Insertion sort and mergesort (but not selection sort or shellsort).

sorted by time	sorted by location (not stable)	sorted by location (stable)
Chicago 09:00:00	Chicago 09:25:52	Chicago 09:00:00
Phoenix 09:00:03	Chicago 09:03:13	Chicago 09:00:59
Houston 09:00:13	Chicago 09:21:05	Chicago 09:03:13
Chicago 09:00:59	Chicago 09:19:46	Chicago 09:19:32
Houston 09:01:10	Chicago 09:19:32	Chicago 09:19:46
Chicago 09:03:13	Chicago 09:00:00	Chicago 09:21:05
Seattle 09:10:11	Chicago 09:35:21	Chicago 09:25:52
Seattle 09:10:25	Chicago 09:00:59	Chicago 09:35:21
Phoenix 09:14:25	Houston 09:01:10	Houston 09:00:13
Chicago 09:19:32	Houston 09:00:13	Houston 09:01:10
Chicago 09:19:46	Phoenix 09:37:44	Phoenix 09:00:03
Chicago 09:21:05	Phoenix 09:00:03	Phoenix 09:14:25
Seattle 09:22:43	Phoenix 09:14:25	Phoenix 09:37:44
Seattle 09:22:54	Seattle 09:10:25	Seattle 09:10:11
Chicago 09:25:52	Seattle 09:36:14	Seattle 09:10:25
Chicago 09:35:21	Seattle 09:22:43	Seattle 09:22:43
Seattle 09:36:14	Seattle 09:10:11	Seattle 09:22:54
Phoenix 09:37:44	Seattle 09:22:54	Seattle 09:36:14

no longer sorted by time

still sorted by time

Note. Need to carefully check code ("less than" vs "less than or equal to").

Stability: insertion sort

Proposition. Insertion sort is **stable**.

```
public class Insertion
{
    public static void sort(Comparable[] a)
    {
        int N = a.length;
        for (int i = 0; i < N; i++)
            for (int j = i; j > 0 && less(a[j], a[j-1]); j--)
                exch(a, j, j-1);
    }
}
```

i	j	0	1	2	3	4
0	0	B ₁	A ₁	A ₂	A ₃	B ₂
1	0	A ₁	B ₁	A ₂	A ₃	B ₂
2	1	A ₁	A ₂	B ₁	A ₃	B ₂
3	2	A ₁	A ₂	A ₃	B ₁	B ₂
4	4	A ₁	A ₂	A ₃	B ₁	B ₂
		A ₁	A ₂	A ₃	B ₁	B ₂

Pf. Equal items never move past each other.

Stability: selection sort

Proposition. Selection sort is **not** stable.

```
public class Selection
{
    public static void sort(Comparable[] a)
    {
        int N = a.length;
        for (int i = 0; i < N; i++)
        {
            int min = i;
            for (int j = i+1; j < N; j++)
                if (less(a[j], a[min]))
                    min = j;
            exch(a, i, min);
        }
    }
}
```

i	min	0	1	2
0	2	B ₁	B ₂	A
1	1	A	B ₂	B ₁
2	2	A	B ₂	B ₁
		A	B ₂	B ₁

Pf by counterexample. Long-distance exchange might move an item past some equal item.

Stability: shellsort

Proposition. Shellsort sort is **not** stable.

```
public class Shell
{
    public static void sort(Comparable[] a)
    {
        int N = a.length;
        int h = 1;
        while (h < N/3) h = 3*h + 1;
        while (h >= 1)
        {
            for (int i = h; i < N; i++)
            {
                for (int j = i; j > h && less(a[j], a[j-h]); j -= h)
                    exch(a, j, j-h);
            }
            h = h/3;
        }
    }
}
```

h	0	1	2	3	4
	B ₁	B ₂	B ₃	B ₄	A ₁
4	A ₁	B ₂	B ₃	B ₄	B ₁
1	A ₁	B ₂	B ₃	B ₄	B ₁
	A ₁	B ₂	B ₃	B ₄	B ₁

Pf by counterexample. Long-distance exchanges.

Stability: mergesort

Proposition. Mergesort is **stable**.

```
public class Merge
{
    private static Comparable[] aux;
    private static void merge(Comparable[] a, int lo, int mid, int hi)
    { /* as before */ }

    private static void sort(Comparable[] a, int lo, int hi)
    {
        if (hi <= lo) return;
        int mid = lo + (hi - lo) / 2;
        sort(a, lo, mid);
        sort(a, mid+1, hi);
        merge(a, lo, mid, hi);
    }

    public static void sort(Comparable[] a)
    { /* as before */ }
}
```

Pf. Suffices to verify that merge operation is stable.

Stability: mergesort

Proposition. Merge operation is stable.

```
private static void merge(Comparable[] a, int lo, int mid, int hi)
{
    for (int k = lo; k <= hi; k++)
        aux[k] = a[k];

    int i = lo, j = mid+1;
    for (int k = lo; k <= hi; k++)
    {
        if (i > mid)          a[k] = aux[j++];
        else if (j > hi)     a[k] = aux[i++];
        else if (less(aux[j], aux[i])) a[k] = aux[j++];
        else                 a[k] = aux[i++];
    }
}
```

0	1	2	3	4	5	6	7	8	9	10
A ₁	A ₂	A ₃	B	D	A ₄	A ₅	C	E	F	G

Pf. Takes from left subarray if equal keys.